DEWALT®

YEARBOOK OF 2024 INNOVATIONS

XR®
OUR BEST PERFORMING
18V
POWER TOOLS
8AH
18V 5AH
POWERSTACK

https://cee.dewalt.global/

GUARANTEED TOUGH.®

DEWALT

CONTENT IN THE YEARBOOK 2024:

Intro 3
DEWALT 100 Years anniversary .... 4 – 9
DEWALT Battery technology .... 10 – 17
DEWALT Drill-/hammer drilldrivers .... 18 – 25
DEWALT Impact drivers .... 26 – 32
DEWALT Impact wrenches .... 33 – 35
DEWALT ”Metal” tools .... 36 – 43
DEWALT ”Concrete” tools .... 44 – 57
DEWALT ”Wooden” tools .... 58 – 73
DEWALT Kits .... 74 – 81
DEWALT ”GARDEN” tools .... 82 – 105
DEWALT Laser .... 106 – 117
DEWALT STORAGE DXL .... 118 – 129
DEWALT Accessories .... 130 – 133
DEWALT ”Lifting” tools GRABO .... 134 – 136
DEWALT Handtools .... 137 – 141

XR

EXPERIENCE POWER™

WITH DEWALT

THE TOUGH GET TOUGHER

“OUR USERS – THE WORLD’S MOST DEMANDING PROS"

FROM THE ENTERPRISE PRO TO NEW PROS IN THE FIELD, THEY HAVE NO TIME FOR EXCUSES. THEY HOLD THEMSELVES, THEIR TEAM, THEIR TOOLS AND EQUIPMENT TO THE HIGHEST STANDARD

BECAUSE THAT’S HOW YOU EARN AND KEEP RESPECT ON THE JOBSITE”

Welcome to the special edition of the DEWALT NEWS "YEARBOOK 2024." We are proud to present all the DEWALT innovations made for the year 2024, now available for the construction and industry sectors.

The DEWALT team assures all DEWALT fans that many more exciting new products and innovations are coming in 2025.

Stay tuned for the 2025 DW NEWS leaflets, which will be available online in February, May, and September.

DEWALT Team, wish you all a safe and productive year on site in 2025

DEWALT TEAM

DEWALT
18V XR BRUSHLESS
XR®
EXPERIENCE POWER™

DEWALT
XR
18V

DEWALT 100 YEARS

DEWALT® 100 YEARS marks the centennial anniversary of a legendary brand that prides itself on building tough and efficient tools for the world's most demanding pros, pushing them to perform at the highest standards every day. With a focus on innovation that matters and relentless improvement, this benchmark year continues DEWALT®'s tradition as a true force in the industry, confident and intent on shaping tomorrow's jobsite productivity–consistently dedicated to CONSTRUCTING A WORLD BUILT FOR THE FUTURE.

A NAME THAT ME

SINCE

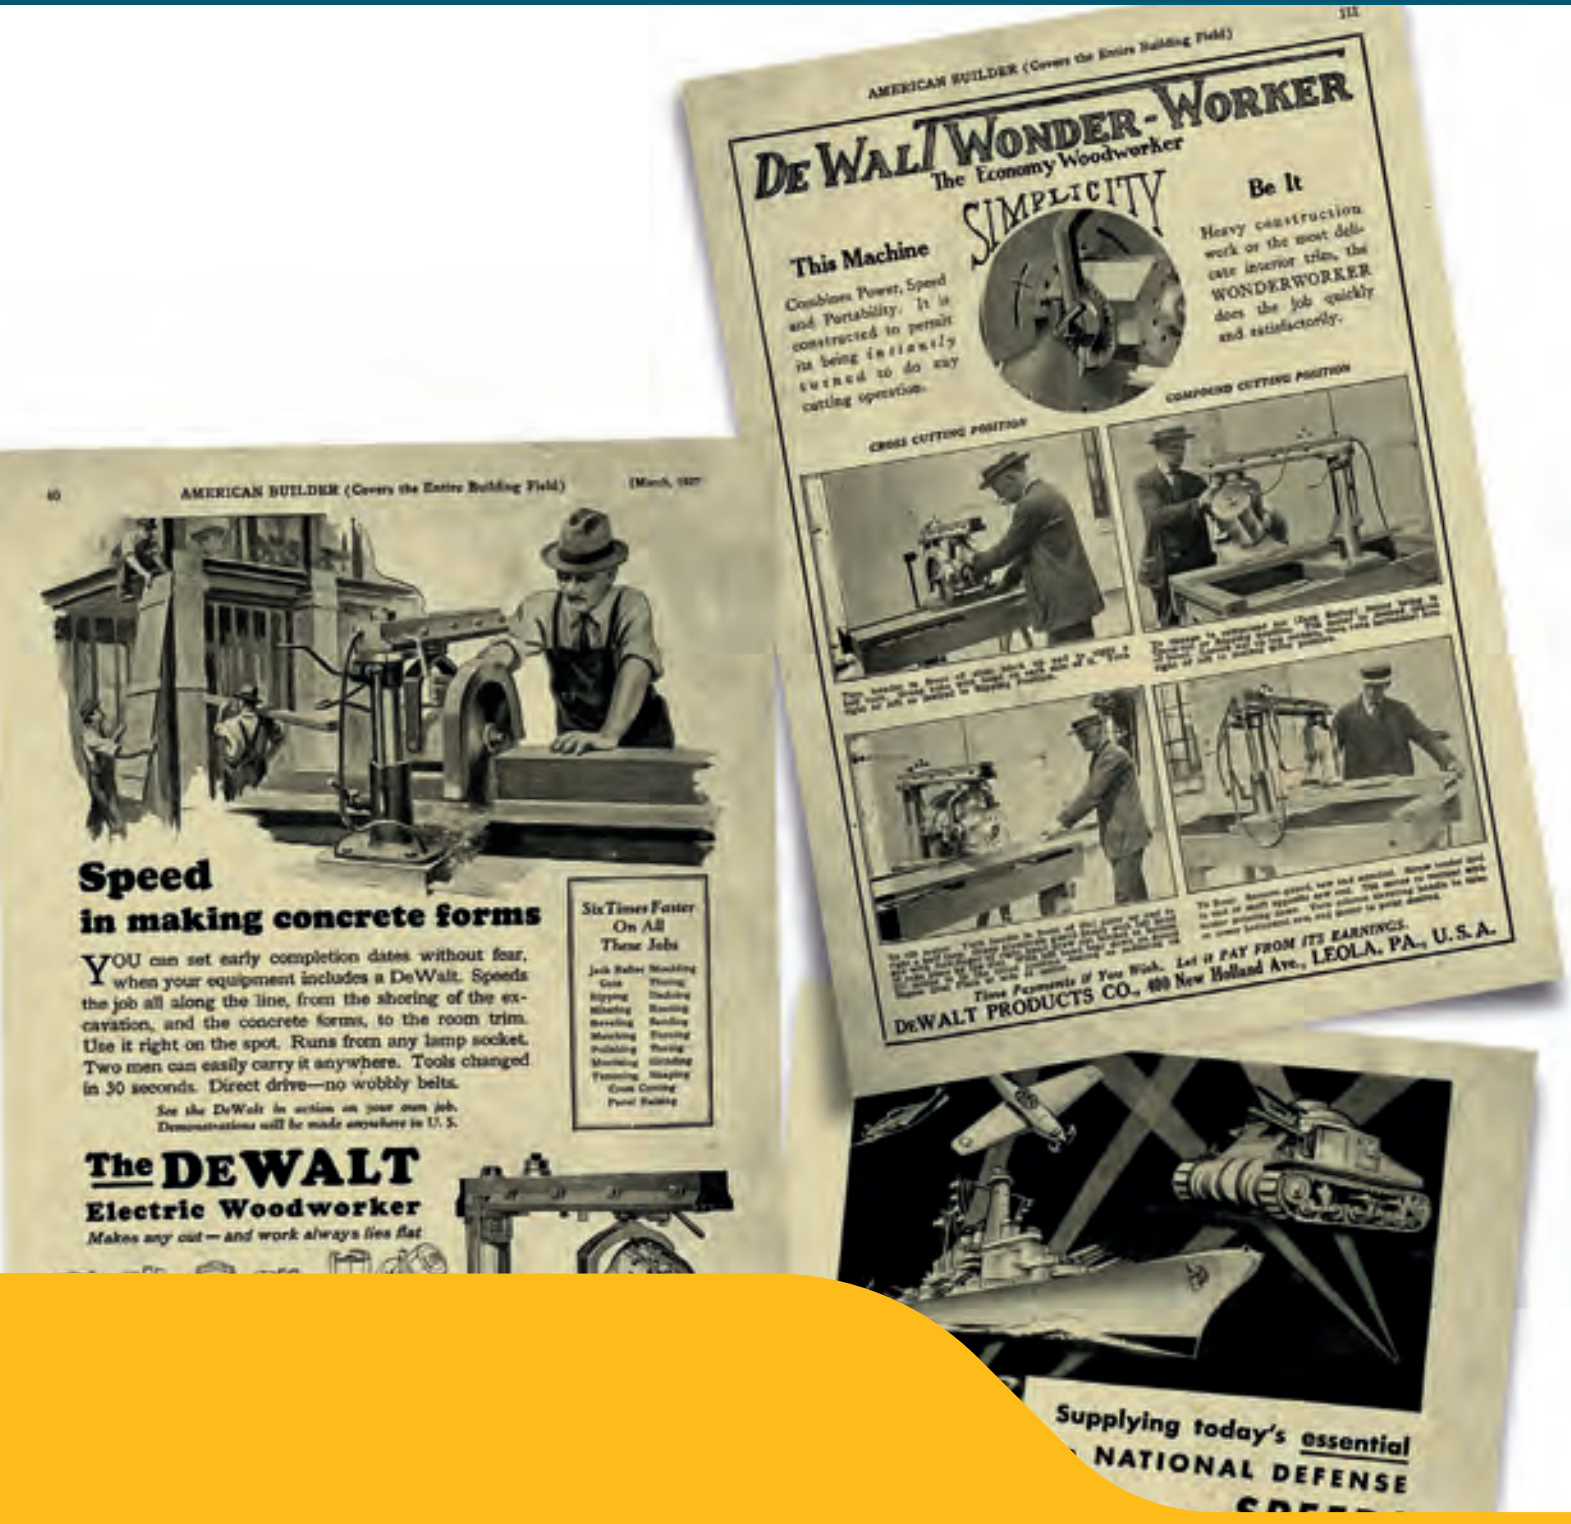

AMERICAN BUILDER (Covers the Entire Building Field)

DE WALT WONDER-WORKER

The Economy Woodworker

SIMPLICITY

This Machine

Combines Power, Speed and Portability. It is constructed to permit its being instantly turned to do any cutting operation.

Be It

Heavy construction work or the most delicate interior trim, the WONDERWORKER does the job quickly and satisfactorily.

CROSS CUTTING POSITION

COMPOUND CUTTING POSITION

Time Payments if You Wish. Let it PAY FROM ITS EARNINGS.

DEWALT PRODUCTS CO., 400 New Holland Ave., LEOLA, PA., U.S.A.

AMERICAN BUILDER (Covers the Entire Building Field) (March, 1927

Speed
in making concrete forms

YOU can set early completion dates without fear, when your equipment includes a DeWalt. Speeds the job all along the line, from the shoring of the excavation, and the concrete forms, to the room trim. Use it right on the spot. Runs from any lamp socket. Two men can easily carry it anywhere. Tools changed in 30 seconds. Direct drive—no wobbly belts.

See the DeWalt in action on your own job. Demonstrations will be made anywhere in U. S.

Six Times Faster On All These Jobs

The DEWALT
Electric Woodworker
Makes any cut—and work always lies flat

Supplying today's essential
NATIONAL DEFENSE

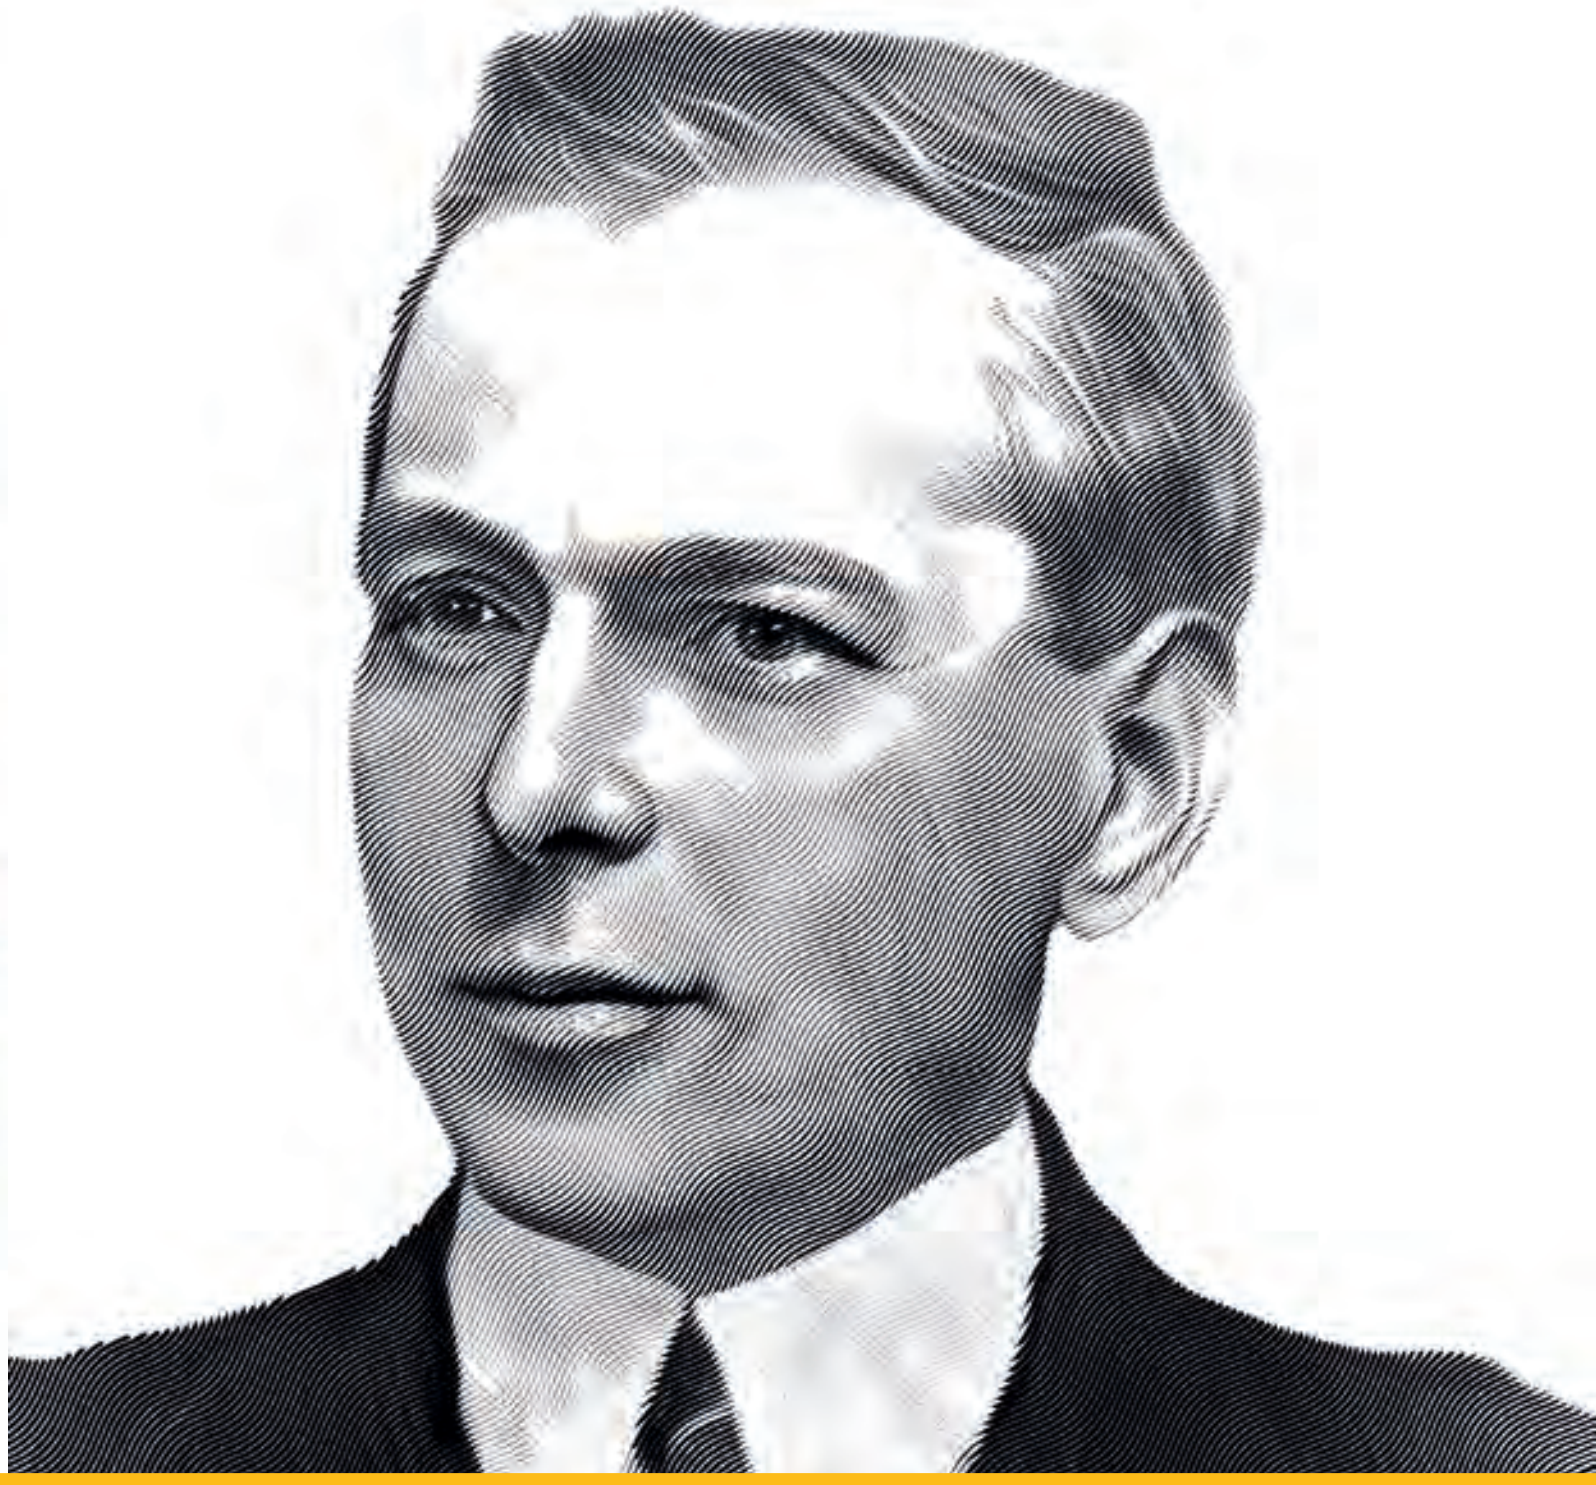

FOCUS ON THE 5 PILLARS: FOR THE PROS, INNO

EANS SOMETHING

E 1924

DEWALT
POWER STACK

DEWALT
FLEXVOLT

VATION, PERFORMANCE, SAFETY & EDUCATION.

THE DEWALT 100

1924-1959

STRONG FOUNDATIONS

INDUSTRY INNOVATION

Laying the groundwork for DEWALT, Raymond DeWalt files his first patents (1921 & 1923)

DEWALT Products Co, is founded because of DEWALT's revolutionary inventions (1924)

SAFETY, ALWAYS

Raymond E. DEWALT files patent for healthcare device (1930)

STRONG FOUNDATIONS

DRIVING PRODUCTIVITY

Early adoption by pros inspires testimonials from tradespeople (1926)

DEWALT tools support WWII efforts (1941)

PROFITABILITY & RESULTS

DEWALT becomes a global success, distributing products internationally (1930)

1960-1995

GROWING WITH THE PROS

INDUSTRY INNOVATION

Black & Decker acquires DEWALT (1960)

Sets the standard for building, featured in "House of Good Taste" at World's Fair (1964-65)

DRIVING PRODUCTIVITY

DEWALT reinvigorates pro focus, builds on legacy as a "mystical" brand known for "tough professionalism" (1990s)

DEWALT throws "sawdust parties," bringing tools to pro jobsites (1992)

GROWING WITH THE PROS

PROFITABILITY & RESULTS

DEWALT's pro focus skyrockets profits in 1990s

YEAR TIMELINE

1996-2020

EXPANDING IMPACT

INDUSTRY INNOVATION

TOOL CONNECT revolutionizes the jobsite through Bluetooth (2015)

DEWALT Trades Scholarship Announcement (2019)

SAFETY, ALWAYS

DEWALT batteries reliably power COVID-19 respirators, enhancing 13.4M lives (2020)

Through ToolBank, DEWALT aids catastrophic event recovery

EXPANDING IMPACT

DRIVING PRODUCTIVITY

DEWALT innovates in framing, flooring and finishing by launching seven new nailers (2017)

DEWALT unifies Pro teams, introduces DEWALT jobsite WIFi Access Point (2017)

PROFITABILITY & RESULTS

Groundbreaking FLEXVOLT generates = $100 million in four months (2016)

2021-PRESENT & BEYOND

TRANSFORMING FUTURES

INDUSTRY INNOVATION

Wins big at Pro Tool Innovation Awards (2021, 2022 & 2023)

Grow the Trades program, commits $30 million "to initiatives that grow skills for tradespeople by 2027"

SAFETY, ALWAYS

Safety by design: POWERSTACK battery provides pros with safer solution (2021)

TRANSFORMING FUTURES

DRIVING PRODUCTIVITY

DEWALT tools power McLaren Racing Formula 1 Team (2021)

DEWALT Powering the Future Survey (2022)

PROFITABILITY & RESULTS

DEWALT × McLaren F1 Team tools (2023)

DEWALT expands outdoor power solutions, launching its first snowblower (2023)

DEWALT
18V 3.5AH
XR
POWER STACK
18V XR
POWER STACK™
DEWALT 3 YEAR GUARANTEE

NEW

18V XR POWERSTACK BATTERY 3,5 AH, DCBP318

Pouch battery cells provide increased power, performance & lifespan in application 3.5Ah capacity pack enhanced size for compact applications whilst supporting growing requirement for performance and runtime.
Rubber overmould provides increased protection & premium feel.
Less heat build up lower cell resistance/pressure ensures battery runs cooler for longer full 18V XR system compatibility.

SPECIFICATIONS	
Battery voltage	18V
Battery capacity	3,5 Ah
Measures	Length 119 mm, Width 76,9 mm, Height 49 mm
Weight	0,506 kg
Battery cells	Li-ion pouch cells

ART.NR.	**PRODUCT DESCRIPTION**
DCBP318-XJ	18V XR 3,5 AH POWERSTACK BATTERY

18V XR BATTERY 8,0 AH, DCB1880

The high 8,0 Ah battery supports the growing user runtime requirements.
Provides additional runtime (up to +60%) versus DCB184 5Ah battery.
Provides also an increased power, performance & lifespan in application.
Improved thermal properties ensures lower cell resistance resulting in longer, stronger & cooler operation.
Rubber overmould provides protection, increases durability and adds premium feel.

SPECIFICATIONS	
Battery voltage	18V
Battery capacity	8,0 Ah
Measures	Length 131 mm, Width 83 mm, Height 71 mm
Weight	1,05 kg
Battery cells	Li-ion 3rd. Generation cylindrical cells

ART.NR.	PRODUCT DESCRIPTION
DCB1880-XJ	18V XR 8,0 AH BATTERY

The battery is classified as Dangerous goods class 9>100 Wh, 18V x 8 Ah = 144 Wh

DEWALT BATTERY

1. GENERATION
ROUND CELLS = 18650

18V XR

- JOBSITE PERFORMANCE
- RELIABLE RUN TIME

DCB183-XJ

DCB184-XJ

3. GENERATION
ROUND CELLS = TABLESS

18V XR

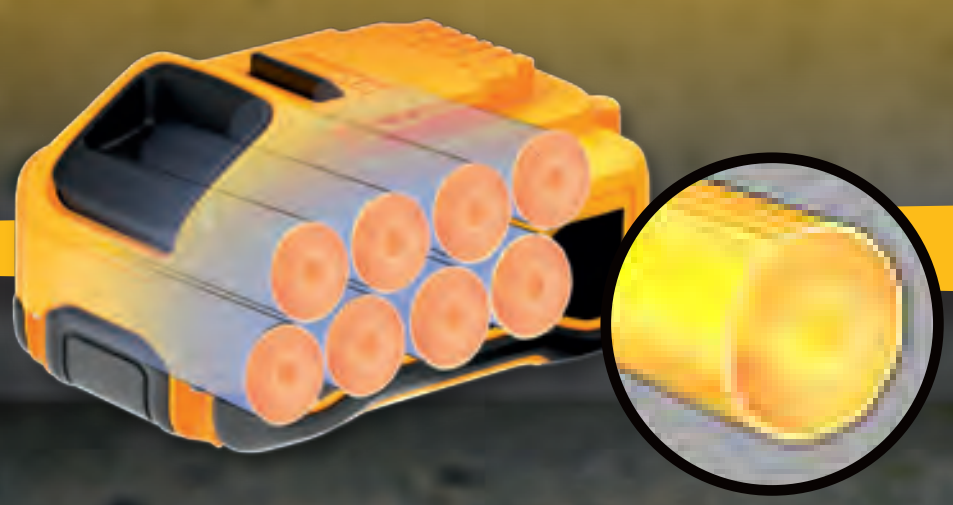

- **INCREASED POWER**
  VS STANDARD CYLINDRICAL CELLS GEN 1
- **INCREASED CAPACITY (8 AH) RUNTIME**
- **IMPROVED THERMAL PERFORMENCE**
  VS 5AH CYLINDRICAL BATTERY CELLS 18650
- **1.5X LIFESPAN**
  VS 5AH CYLINDRICAL BATTERY CELLS 18650
- **LOWER IMPEDANCE CONSTRUCTION**
  VS STANDARD CYLINDRICAL CELLS GENERATION 1

DCB1880-XJ

TECHNOLOGY

1. GENERATION

POUCH CELLS

POWERSTACK™ 18V XR

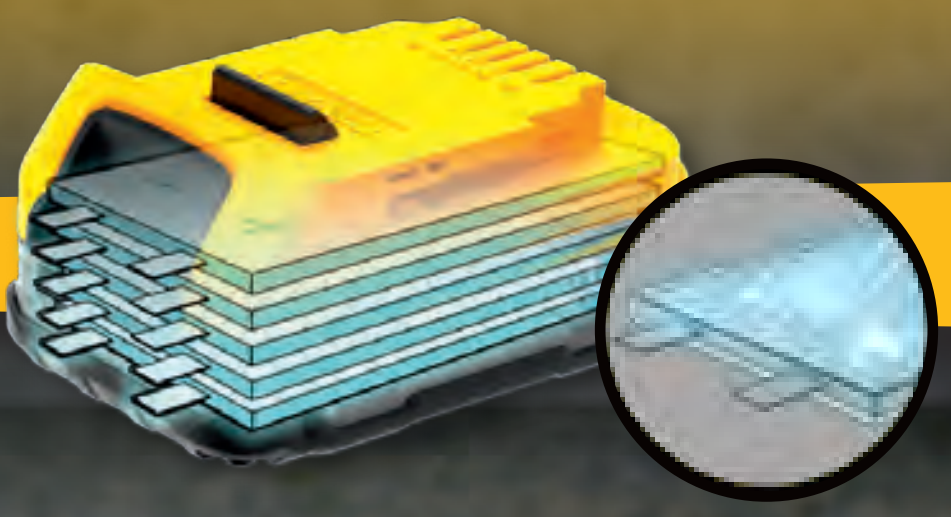

✓ **50% MORE POWER**
VS 5AH CYLINDRICAL BATTERY GENERATION 1

✓ **COMPACT SIZE (STACKED CELLS)**
BEST THERMAL PERFORMENCE

✓ **2X LIFESPAN**
VS 5AH CYLINDRICAL BATTERY CELLS 18650

✓ **LOWEST IMPEDANCE CONSTRUTION**
VS CYLINDRICAL CELLS

✓ **3 YEAR WARRANTY**

DCBP034-XJ

DCBP318-XJ

DCBP518-XJ

1. & 2. GENERATION

ROUND CELLS = 18650/21700

54V XR FLEXVOLT

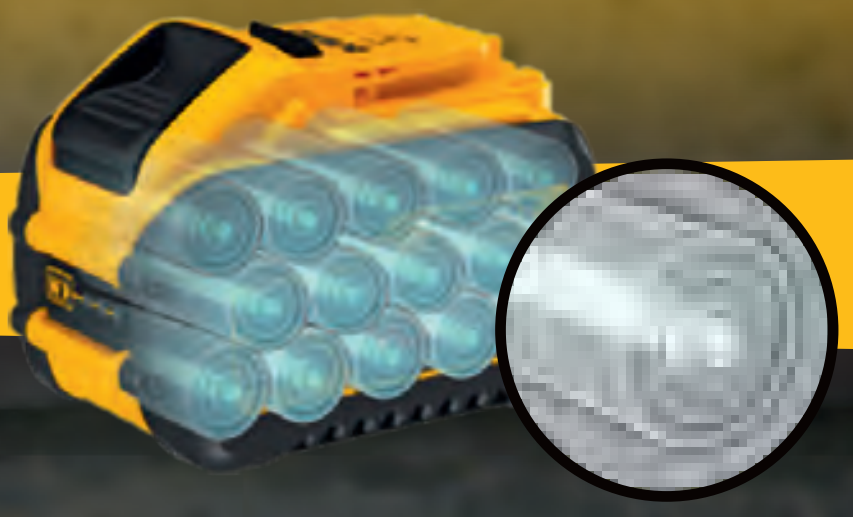

✓ **HIGHEST POWER**

✓ **LONGEST CAPACITY (RUNTIME)**

✓ **18V AND 54V FLEXIBLE VOLTAGE**

DCB546-XJ

DCB547-XJ

DCB548-XJ

DCB549-XJ

18V BATTERIES/CHARGERS WHICH 18V HAMMER-

DCB183-XJ
2,0 AH

DCB182-XJ
4,0 AH

DCB184-XJ
5,0 AH

POWERSTACK

DCBP318-XJ
3,5 AH PS

POWERSTACK

DCBP518-XJ
5,0 AH PS

POWERSTACK
DEWALT AUTO

DCBP518G-XJ**
5,0 AH PS

DCB1880-XJ
8,0 AH

DCB546-XJ
6,0 AH*

DCB094K-QW
MULTI CHARGER
CHARGER SPEED 5A

DCB1104-QW
CHARGER SPEED 4A

DCB132-QW
2 PORTS CHARGER
SIMULTANEOUSLY
CHARGER SPEED 4A

18V BRUSHLESS XR

250+ 18V XR

CAN BE USED FOR ALL THE DEWALT & DRILL DRIVERS

DEWALT AUTO

DCB184G-XJ**
5,0 AH

LANYARD READY

DCB184LR-XJ
5,0 AH

POWER STACK

DCBP034-XJ
1,7 AH PS

POWER STACK
DEWALT AUTO

DCBP034G-XJ**
1,7 AH PS

DCB547-XJ
9,0 AH*

DEWALT AUTO

DCB547G-XJ**
9,0 AH*

DCB548-XJ
12,0 AH*

DCB549-XJ
15,0 AH*

DCB118-QW
CHARGER SPEED 8A

TOUGHSYSTEM 2.0

DCB104-QW
4 PORTS CHARGER
SIMULTANEOUSLY
CHARGER SPEED 8A

DCB117-QW
CHARGER SPEED
12A

* ENERGY VALUE FROM BATTERY IN 18V PRODUCTS
RED TRANSPORT CAP TO BE REMOVED BEFORE USE OF BATTERY
** SPECIAL COATING ON BATTERY HOUSING TO RESIST CHEMICALS FROM INDUSTRI USAGE

DEWALT

POWERSTACK™

18V BRUSHLESS XR

DEMO/META
GENERAL CONSTRUCTION
25
18V
LIGHT DUTY

WHICH BATTERY I

54V XR FLEX VOLT

DEWALT
POWER STACK
18V 5AH

DEWALT 3 YEAR GUARANTEE

* 3 Year guarantee only valid for registration on POWERSTACK battery.

ALWORKING
CONCRETE/COMMERCIAL BUILDS
HEAVY DUTY
XR

S RIGHR FOR ME?

18V XR BRUSHLESS 100 YEAR HAMMER DRILL DRIVER

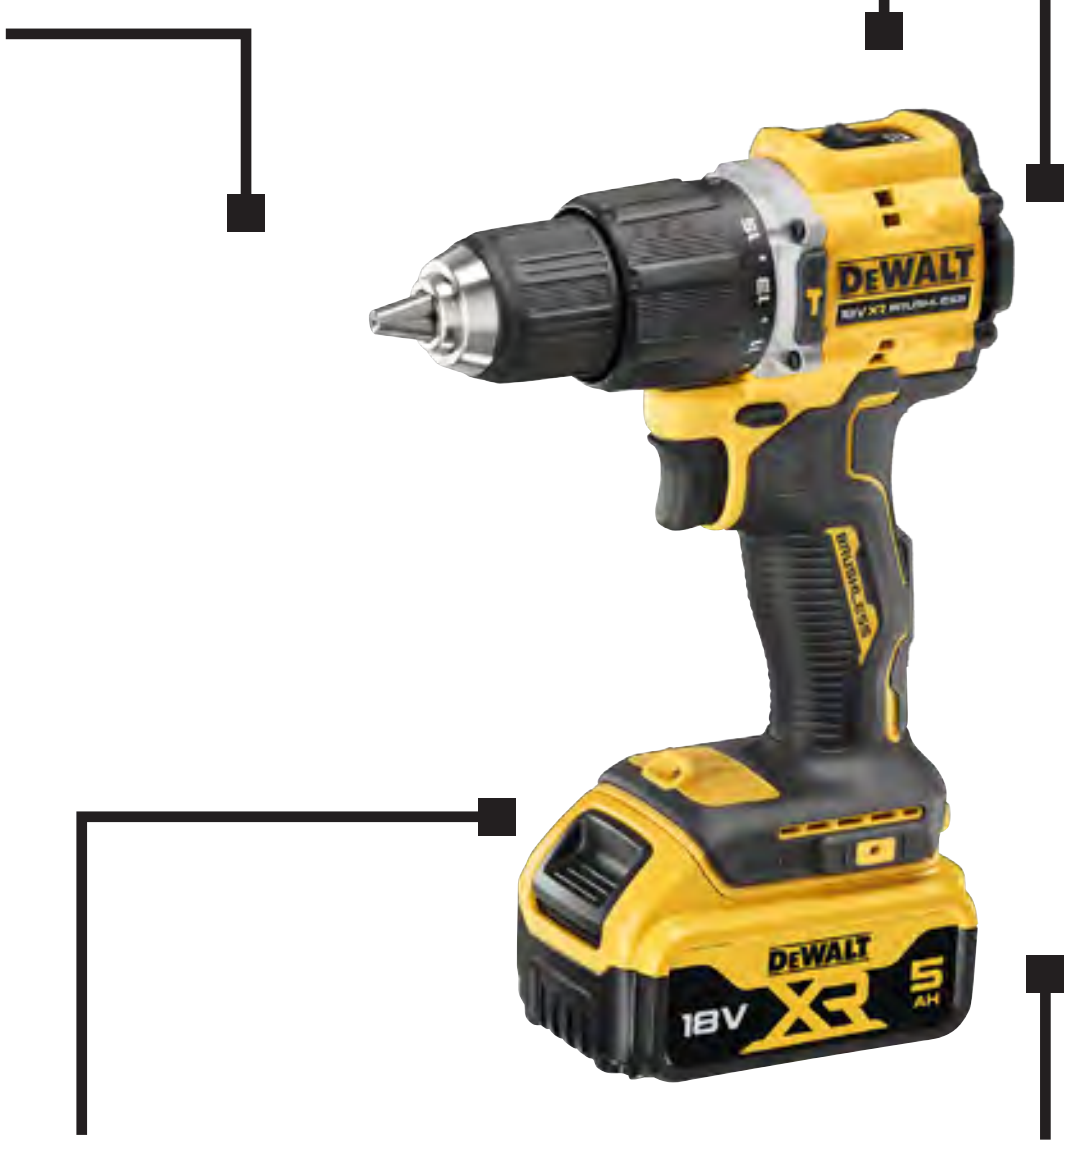

KEYLESS CHUCK
Ratcheting chuck for increased grip strength

2 SPEED TRANSMISSION
For increased versatilty and control in applications

BRUSHLESS MOTOR
For long runtime and tool life

LED WORK LIGHT
Illuminates work area for use in poorly lit applications

18V XR TECHNOLOGY
Part of the 18V XR system of 250+ tools

68 Nm of torque in a compact 164 mm body

2 speed & 15 torque settings for full control over drilling and fastening

RELATED ACCESSORIES

100 Piece Drill Drive Kit

DT70785-QZ

DCD100P2T KIT INCLUDES

- (1) DCD100 Brushless Hammer Drill Driver
- (2) DCB184 XR 5 Ah Batteries
- (1) DCB1104 XR 4 Ah Charger
- (1) TSTAK Compatible Kitbox

DEWALT
100 YEARS
LIMITED EDITION
2024
18V
BRUSHLESS
XR

NEW

18V XR 100 YEAR ANNIVERSARY HAMMER DRILL DRIVER, DCD100

The Limited edition DCD100 has been engineered to celebrate 100 years of DEWALT and our relentless pursuit of the cordless jobsite. This brushless drill is our most compact 18V XR hammer drill driver that delivers up to 68 Nm of torque in a compact 164mm body, designed to give you the performance you need on the toughest jobsites. 2 speed and 15 torque settings give you the ultimate control over your drilling and fastening applications. A bright LED positioned on the foot offers greater visibility in dark and confined spaces. Can be purchased in 3 different versions, 1 x 4,0 Ah / 2 x 4,0 Ah / 2 x 5,0 Ah.

SPECIFICATIONS	
Power voltage	18V
Max torque	68 Nm
Max drilling capacity	wood 30 mm/ metal 13 mm/ masonry 13 mm
No load speed drill	0 – 450 / 1650 rpm
Beats pr minute	28050 bpm
Weight (without akku)	1,09 kg

ART.NR.	PRODUCT DESCRIPTION
DCD100M1T-QW	Hammer drill driver, 1 x 4,0 Ah, charger, TSTAK
DCD100M2T-QW	Hammer drill driver, 2 x 4,0 Ah, charger, TSTAK
DCD100P2T-QW	Hammer drill driver, 2 x 5,0 Ah, charger, TSTAK

DEWALT
18V 5AH
POWER
STACK

DEWALT
3
YEAR
GUARANTEE

To obtain 3 years guarantee on the POWERSTACK batteries, each of the batteries needs to be registered in “MY DEWALT” via this link: https://www.dewalt.eu/3/

PERFORM PROTECT
ANTI-ROTATION
18V BRUSHLESS XR
POWER STACK
XR PERFORMANCE REDEFINED

NEW

18V XR PREMIUM 3 SPEED HAMMER DRILL DRIVER, DCD1007

Take on a wide range of demanding applications with the 18V XR brushless 3-speed hammer drill. Our most powerful 18V XR hammer drill is equipped with the ANTI-ROTATION System that shuts the tool down if the rotational motion is excessive and delivers up to 275 holes per charge. Featuring an all-metal transmission construction to help withstand tough applications, this 3-speed hammer drill includes an adjustable 3-position LED to help illuminate dim work areas.

SPECIFICATIONS	
Power	18V
Number of speed	3 gears (1-2-3)
No load speed (min-1)	500/1300/2250
Max. Torque (Nm)	169
Chuck capacity (mm)	1.5–13
Maximum drilling capacity	Wood: 127 mm, Sheet metal: 101 mm Plate steel: 25,4 mm, Masonry: 12,7 mm
Weight without akku (kg)	1,87 kg
Perform & Protect feature	Anti Rotation
LED Light	3 modes (up to 70 Lumens)

ART.NR.	PRODUCT DESCRIPTION
DCD1007NT-XJ	18V XR HAMMERDRILLDRIVER, 169NM, TSTAK SOLO
DCD1007H2T-QW	18V XR HAMMERDRILLDRIVER, 169NM, TSTAK, DCB1104, 2 X DCBP518
DCD1007WW1T-QW	18V XR HAMMERDRILLDRIVER, 169NM, TSTAK, DCB118, 1 X DCB1880

NEW

DCD1007 - PROBABLY THE STRONGEST 3 GEAR HAMMER DRILLDRIVER IN THE MARKET – 169 NM!

STRONG BIT GRIP

GET HIGH BIT RETENTION WITH THE 1/2 IN. RATCHETING, NITRO-CARBURIZED METAL CHUCK WITH CARBIDE INSERTS

18V XR

POWERSTACK™

XR PERFORMANCE REDEFINED

XR
DEWALT
18V XR BRUSHLESS
BRUSHLESS
DEWALT
POWER STACK
18V 5AH

3-SPEED TRANSMISSION

HELP OPTIMIZE RUNTIME AND PERFORMANCE WITH AN ALL METAL TRANSMISSION

3-POSITION LED LIGHT

ILLUMINATE WORK AREAS WITH PUSH-BUTTON LED FEATURING A 20-MINUTE WORK LIGHT SETTING

ANTI-ROTATION
PERFORM PROTECT

ANTI-ROTATION SYSTEM

SENSES THE ROTATIONAL MOTION OF THE TOOL AND SHUTS IT DOWN IF THE MOTION IS EXCESSIVE

DEWALT

DEWALT 18V HAMMER

DCD778
MAX TORQUE
55 NM

DCD709
MAX TORQUE
65 NM

DCD100
MAX TORQUE
68 NM

LIMITED EDITION
2024

DCD796
MAX TORQUE
70 NM

DEWALT 18V DRILL

DCD777
MAX TORQUE
55 NM

DCD708
MAX TORQUE
65 NM

DCD791
MAX TORQUE
70 NM

18V BRUSHLESS XR®

DRILL DRIVERS 2024

PERFORM PROTECT
ANTI-ROTATION

DCD805
MAX TORQUE
90 NM

PERFORM PROTECT
ANTI-ROTATION
LANYARD READY

DCD805P2LRT
MAX TORQUE
90 NM

PERFORMANCE

DCD996
MAX TORQUE
95 NM

PERFORM PROTECT
ANTI-ROTATION

DCD1007
MAX TORQUE
169 NM

DRIVERS 2024

PERFORM PROTECT
ANTI-ROTATION

DCD800
MAX TORQUE
90 NM

PERFORM PROTECT
ANTI-ROTATION
LANYARD READY

DCD800P2LRT
MAX TORQUE
90 NM

PERFORMANCE

DCD991
MAX TORQUE
95 NM

The above 18V XR products are available in various versions with or without batteries/charger/storage – contact the nearest dealer to find out more!

DEWALT

DEWALT
18V XR BRUSHLESS
XR
POWER STACK
18V

"PROBALY THE STRONGEST 18V IMPACT DRIVER ON THE MARKET! – 282 NM"

18V XR

NEW

18V XR IMPACT DRIVER, DCF860

Latest tool in the DEWALT impact driver range delivers class leading performance and speed of application

High performance in a compact tool – 282Nm!, Improved 18V brushless motor for extended durability, efficiency and power. Compact design with 123 mm in length. Fits in tighter spaces and ease to store. Tactile 4 - mode select feature allows user to select easily different modes and speed control

Super Bright LED with 20-min flashlight mode offers workpiece lighting.

Saves user requiring separate light. Variable speed trigger giving ultimate speed and application control

SPECIFICATIONS	
Power	18 volt
Power output	700 Watt
No load speed	Mode 1 = 0–1800 rpm Mode 2 = 0–2500 rpm Mode 3 = 0–3800 rpm
Max torque	282 Nm
Tool holder	6,35 mm (1/4" Hex)
Light	82 Lumen from 9 LED rings/ 20 min. flashlight mode
Weight without akku	1,09 kg

ART.NR.	PRODUCT DESCRIPTION
DCF860N-XJ	18V XR Impact driver 1/4", 282 NM, bare
DCF860NT-XJ	18V XR Impact driver 1/4", 282 NM, bare,TSTAK*
DCF860E2T-QW	18V XR Impact driver 1/4", 282 NM, Kit**

*NT version comes bare in TSTAK compatible box

**E2T version comes supplied with 2 x DCBP034 Compact Powerstack battery, DCB1102 charger in TSTAK compatible box.

18V XR

POWERSTACK™

DEWALT 3 YEAR GUARANTEE

NEW

18V XR HYDRAULIC IMPACT DRIVER, DCF870

The Hydraulic mechanism performs applications like a deck screw or other light application much quieter than any of our other impact drivers. The quietness is application dependent. For very heavy applications like a bolt plate there is not much difference between the noise level of the hydraulic and typical drivers. Hydraulic mechanism delivers lower overall vibration. A compact unit with a strong compact powerstack battery makes this impact driver useful for many applications in construction and industry.

SPECIFICATIONS	
Power	18V
No load speed (rpm)	0–1100 (Mode 1), 0–3000 (Mode 2), 0–3000 (Mode 3 w/20 minute worklight)
Max torque (Nm)	56 Nm
Tool holder (mm)	6.35 mm
Weight without akku (kg)	1.0 kg

ART.NR.	PRODUCT DESCRIPTION
DCF870N-XJ	18V XR HYDRAULIC IMPACT DRIVER SOLO
DCF870NT-XJ	18V XR HYDRAULIC IMPACT DRIVER SOLO TSTAK
DCF870E2T-QW	18V XR HYDRAULIC IMPACT DRIVER TSTAK 2XPOWERSTACK DCBP034

ULTRA COMPACT DESIGN
Class leading length of only 101 mm
from front to back. Compact design is
extremely ergonomic and allows
mproved access into confined spaces

9 LED RING LIGHT
Gives optimum brightness to deliver
increased visibility in darker areas.
Up to 82 lumens with 20 minute
flashlight mode.

3 MODES, INCLUDING LED MODE
Select the right speed for the application.
Includes flashlight Mode which keeps LED's
illuminated for 20 mins when selected.

NEW

DEWALT 18V XR HYDRAULIC IMPACT DRIVER, DCF870

FOR INDUSTRIAL AND CONSTRUCTION APPLICATIONS

XR
DEWALT
18V XR BRUSHLESS
BRUSHLESS
DEWALT
DEWALT
18V
XR
POWERSTACK

ACTIVE VALVE SYSTEM
The valve spring compensates for viscosity changes in the oil filled mechanism for improved repeatable performance. The oil filled mechanism delivers a 42% quieter operation.
See below where measures are done to obtain 42% less noise versus DCF850.

42%* QUITER

MATCHES FASTERNING SPEED**

TOOL ERGONOMI
The tool ergonomi is optimal if it is paired together with the Powerstack compact battery DCBP034.

---

* DCF870 vs. DCF850: 75mm deck screws into treated 100 mm x 100 mm timber using DCBP034 battery
** DCF870 vs. DCF850: 75mm (L) x 10mm (D) lag bolt into 100mm x 100mm presure treated timber using DCBP034 battery

DEWALT PROFFE
IMPACT

DCF787

SPEED: 2800 RPM I 1 SPEED

TORQUE: 170 NM

LENGTH: 137 MM

DCF840

SPEED: 3200 RPM I 1 SPEED

TORQUE: 192 NM

LENGTH: 129 MM

DCF887

SPEED: 3250 RPM I 3 SPEED

TORQUE: 205 NM

LENGTH: 135 MM

ESIONAL 18V XR
DRIVERS

18V XR

DCF850

SPEED: 3250 RPM I 3 SPEED

TORQUE: 206 NM

LENGTH: 100 MM

18V XR

NEW

DCF870 (HYDRAULIC)

SPEED: MAX. 3000 RPM I 2 SPEED

TORQUE: 56 NM

LENGTH: 101 MM

18V XR

DCF860

SPEED: 3800 RPM I 3 SPEED

TORQUE: 282 NM

LENGTH: 123 MM

PERFORMANCE

THE FIRST DEWALT 18V XR HYDRAULIC IMPACT DRIVER, DCF870

42% QUIETER VERSUS DCF850

18V XR

POWER STACK™

18V XR
POWER STACK
3/4 IN.
HOG RING ANVIL WITH THRU-HOLE

NEW

18V XR ¾" HIGH TORQUE IMPACT WRENCH, DCF964

Up to 1925 Nm Fastening Torque and 2584 Nm Breakaway Torque - More power to complete the heaviest duty applications. Compact design (213mm in length) - Fits in tighter spaces and ease to store.
18V Brushless motor for extended durability, efficiency and power.
Tactile 4 mode select feature allows user to select easily different modes and speed control.
Ergonomic Grip Design for more comfortable Grip allowing for longer duration of use.
Variable speed trigger giving ultimate speed and application control.
Super Bright LED offers workpiece lighting. Saves user requiring separate light.
3/4" Anvil with Hog Ring allows quick socket change and improved life especially with larger sockets in more demanding applications.

SPECIFICATIONS	
Power	18V
No load speed (min-1)	0-440/575/1200 min-1
Impact rate (min-1)	0–2015 min-1
Max tightening torque (Nm)	1728 (Precision Wrench™ mode), 677 (Low mode), 1138 (Medium mode), 1925 (High mode)
Max breakaway torque (Nm)	2576 Nm
Weight without akku (kg)	3,7 kg

ART.NR.	PRODUCT DESCRIPTION
DCF964N-XJ	18V XR HT IMPACT WRENCH 3/4, SOLO
DCF964NT-XJ	18V XR HT IMPACT WRENCH 3/4", SOLO TSTAK

DEWALT 18V XR IMP

DCF923 (G)
ANVIL: 3/8”
TORQUE: 406 NM

DCF921
ANVIL: 1/2”
TORQUE: 406 NM

DCF921 (G)
ANVIL: 1/2”
TORQUE: 406 NM

DCF922
ANVIL: 1/2”
TORQUE: 406 NM

DCF892
ANVIL: 1/2”
TORQUE: 812 NM

DCF891
ANVIL: 1/2”
TORQUE: 812 NM

DCF891 (G)
ANVIL: 1/2”
TORQUE: 812 NM

ACT WRENCH RANGE

DCF900
ANVIL: 1/2”
TORQUE: 1396 NM

DCF900 (G)
ANVIL: 1/2”
TORQUE: 1396 NM

DCF961H2T
ANVIL: 1/2”
TORQUE: 1626 NM

DCF961H2G
ANVIL: 1/2”
TORQUE: 1626 NM

POWER

TOP OF RANGE 1925 NM

DCF964
ANVIL: 3/4”
TORQUE: 1925 NM

PERFORMANCE

*Info on torque measure above is FASTENING torque

18V XR BANDFILE - DCM200

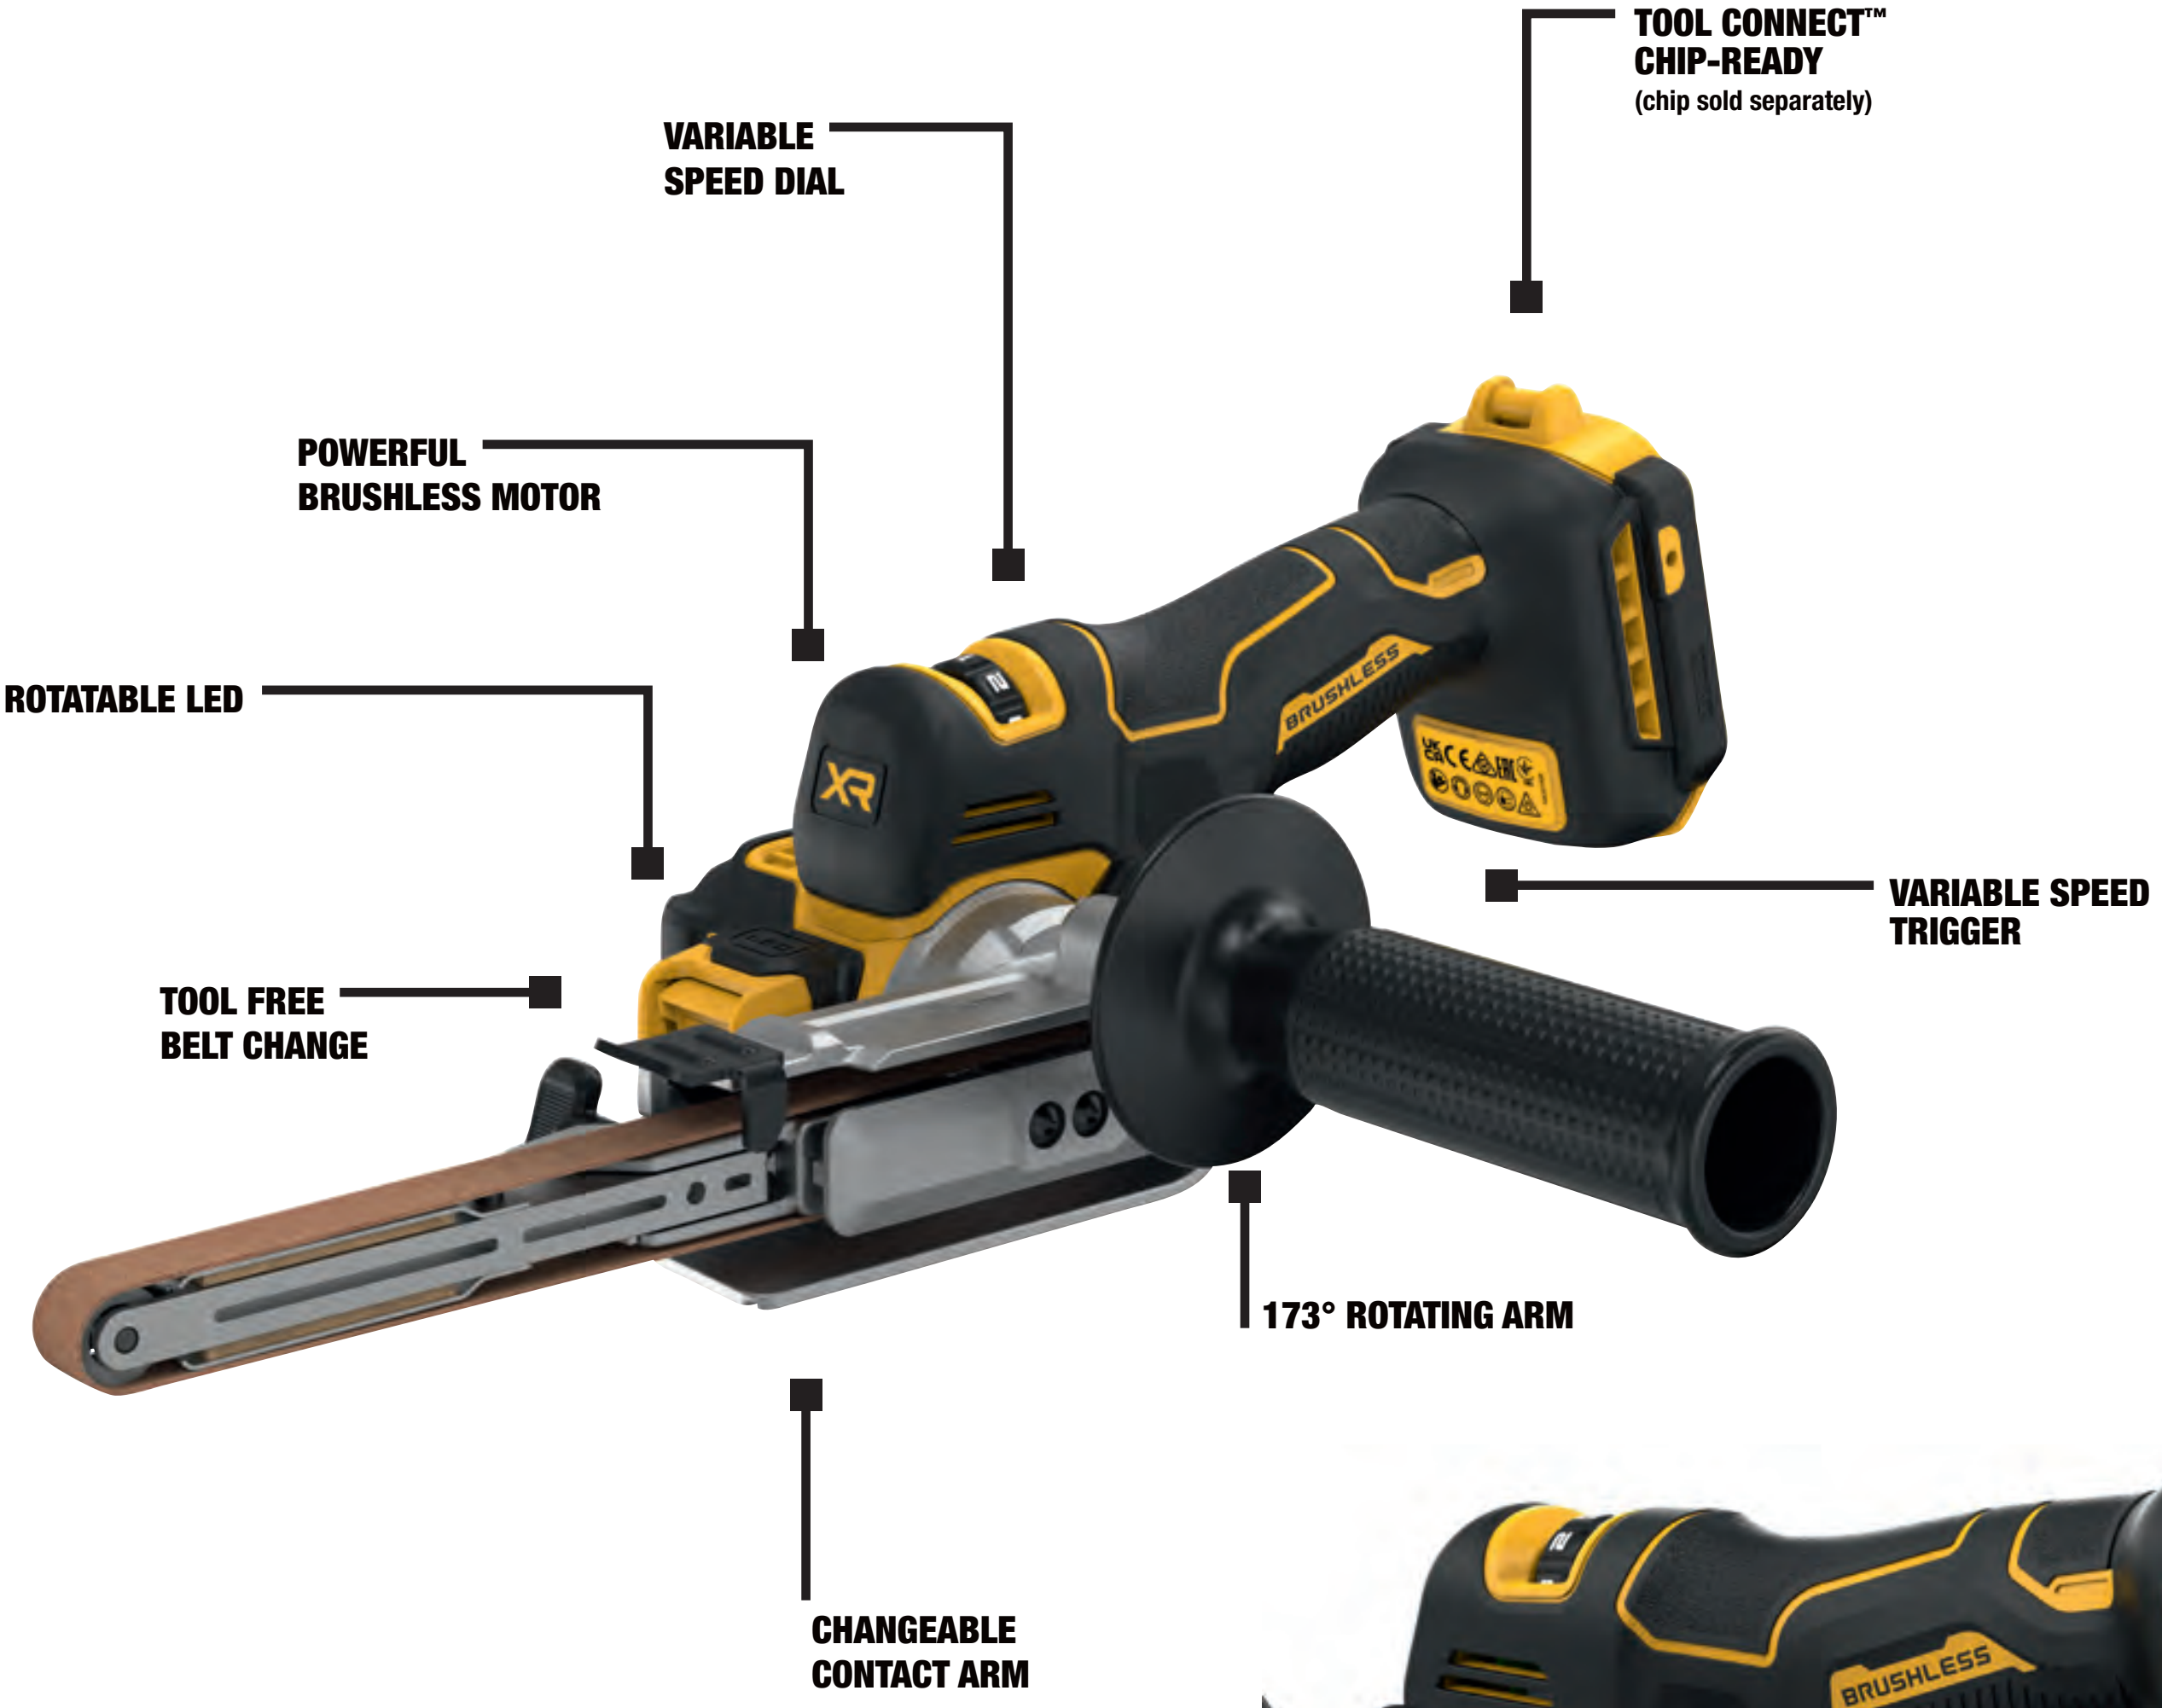
TOOL CONNECT™
CHIP-READY
(chip sold separately)
VARIABLE
SPEED DIAL
POWERFUL
BRUSHLESS MOTOR
ROTATABLE LED
VARIABLE SPEED
TRIGGER
TOOL FREE
BELT CHANGE
173° ROTATING ARM
CHANGEABLE
CONTACT ARM

18V BRUSHLESS XR

VARIABLE SPEED DIAL AND TRIGGER

TOOL FREE BELT CHANGE

CHANGEABLE CONTACT ARM
For multiple applications

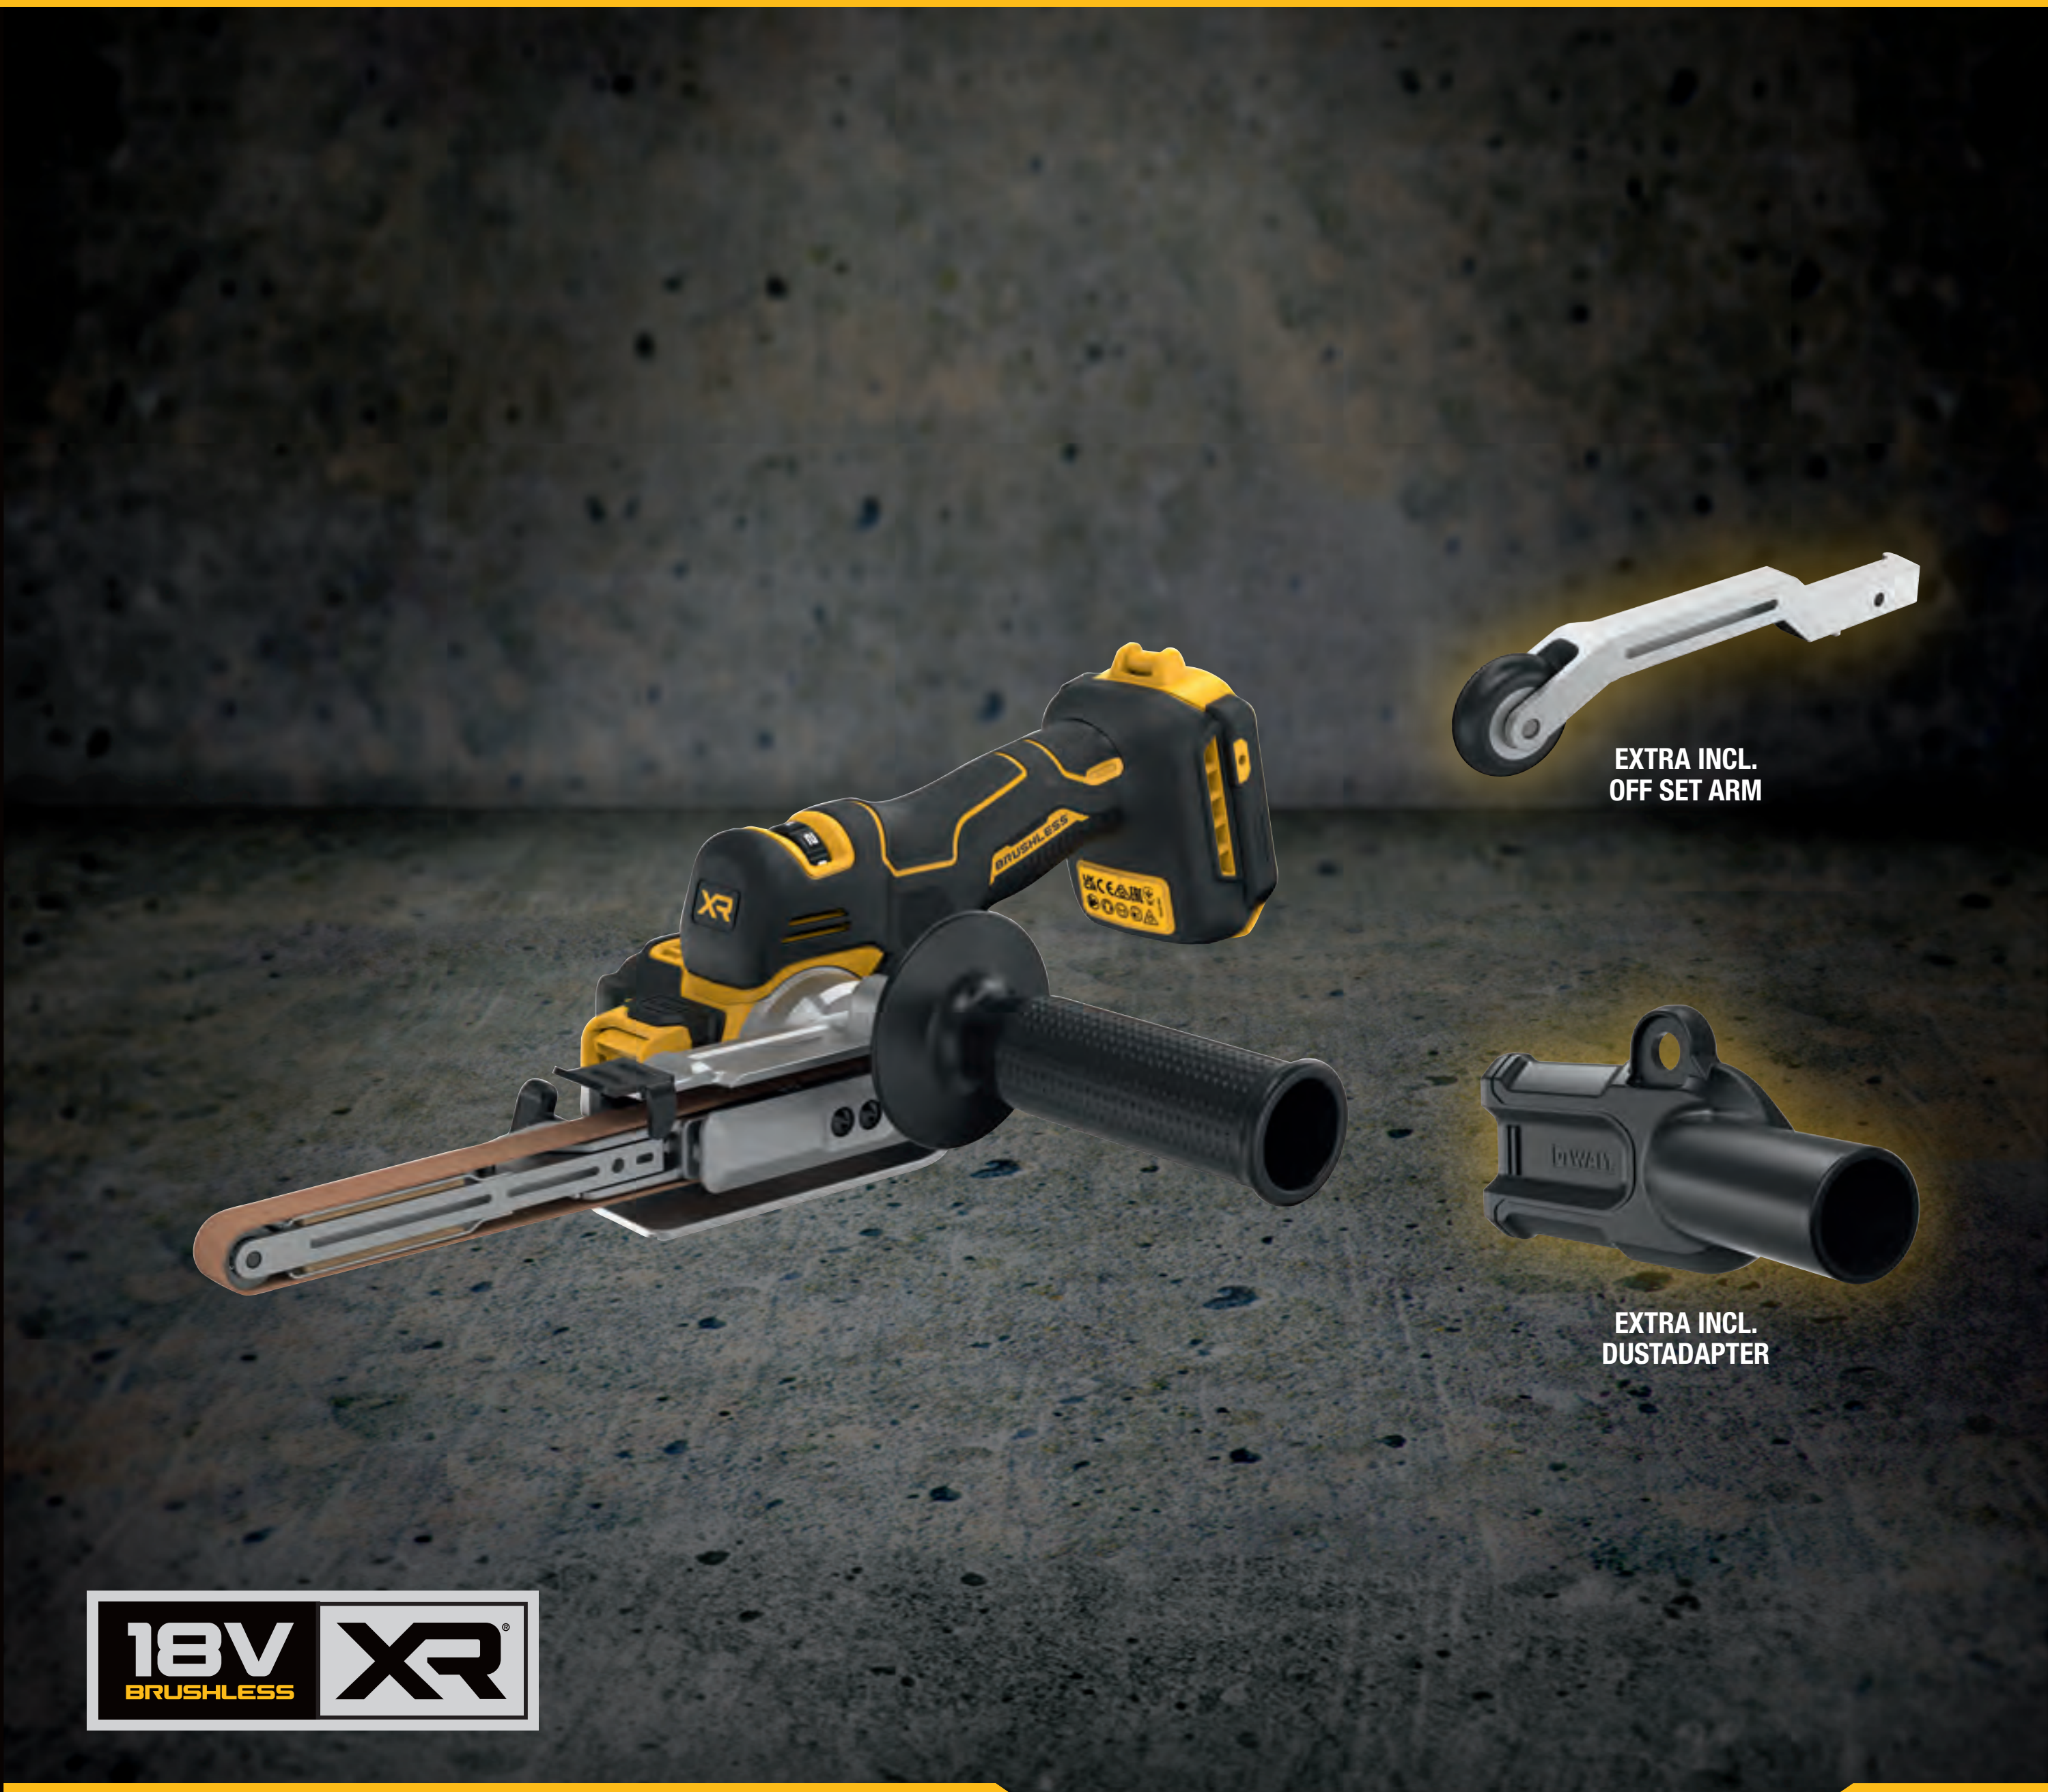

NEW

18V XR BAND FILE, DCM200

Brushless motor delivers powerful and fast material removal. Lightweight and ergonomic design for comfortable use. Variable speed for optimized performance in steels, alloys, plastics and wood, Fully tool-free belt change and adjustments. Rotatable filing arm for easy use in confined areas. Powerful and directional LED work light. Straight and offset arms included for complete versatility. Included dust port allows attachment to compatible dust extraction systems.

SPECIFICATIONS	
Power voltage	18V
Weight (without akku)	2,2 kg
Belt Speed	579-1,700 m/min
Included Arm / Belt Size	13 x 457 mm
Tool Free Belt Change	Yes
Pivoting Arm (Total)	Yes; 173°
LED light	Yes; Rotating
Accessories included	2 x Belts (80G), 1 x Offset Arm, Dust Port

ART.NR.	PRODUCT DESCRIPTION
DCM200N-XJ	18V XR band file solo*
DCM200NT-XJ	18V XR band file, solo in TSTAK**
DCM200E2T-QW	18V XR band file, 2 x 1,7 Ah POWERSTACK***

* = N version is bare unit in carton, comes supplied with side handle, 13 mm standard and off-set arms, 2x Belts (80G) and Dust Port

** = NT version is a bare unit supplied in TSTAK compatible case with side handle, 13 mm standard and off-set arms, 2x Belts (80G) and dust port

*** = E2T version comes supplied in TSTAK compatible case with, 13 mm standard and off-set arms, 2x Belts (80G) and Dust Port, 2 x DCBP034 compact Powerstack batteries and DCB1102 charger.

18V XR BANDSAW - DCS378

FAST, EFFECTIENT PERFORMANCE
Variable speed
trigger and dial

VISIBILITY IN LOW-LIGHT
Built-in LED light

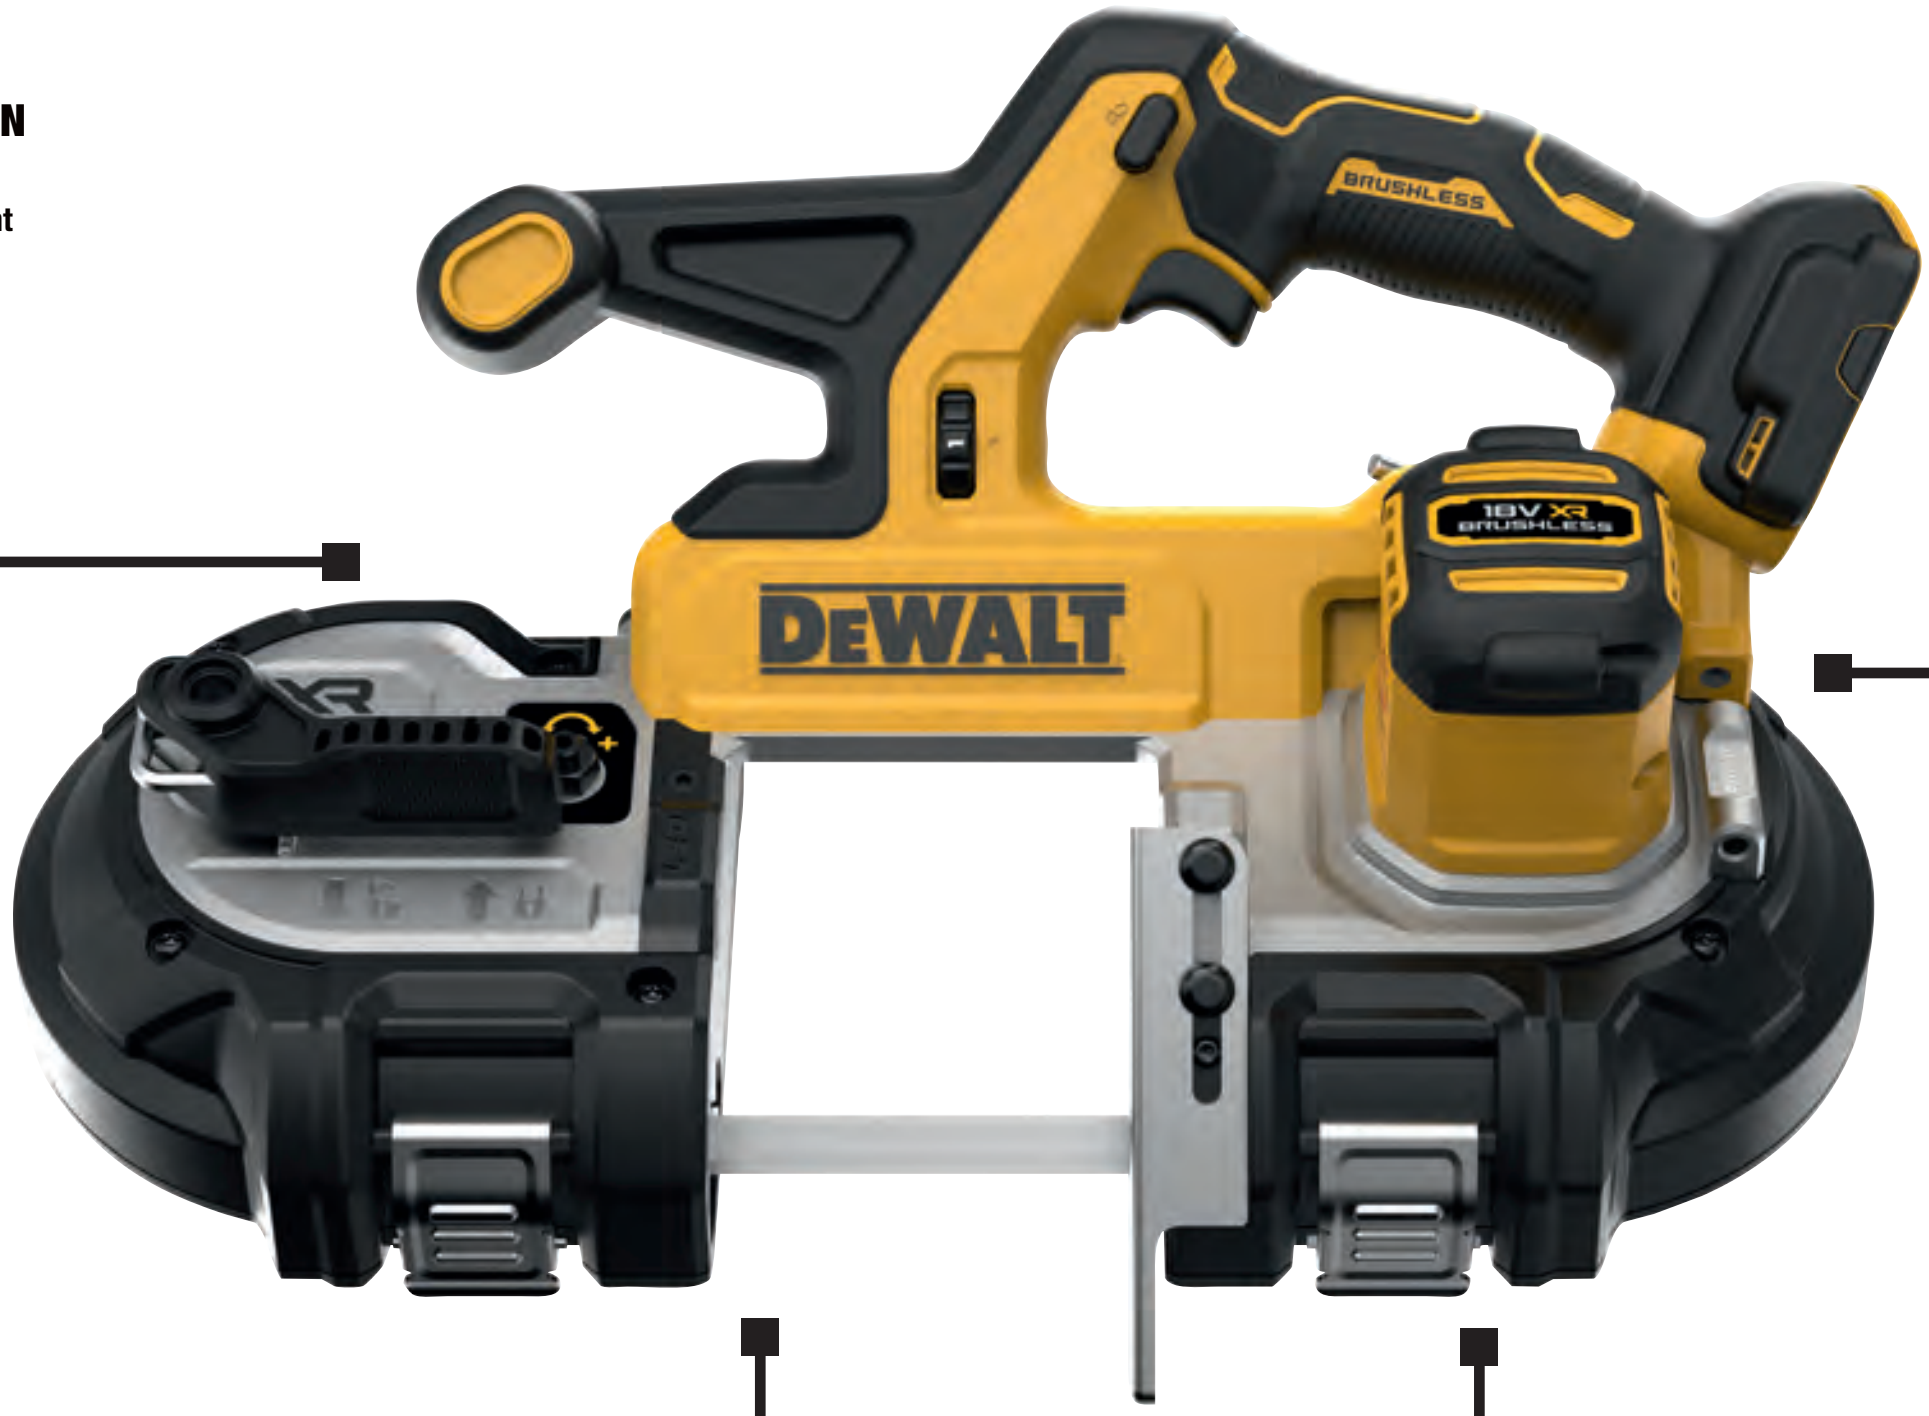
BRUSHLESS
18V XR BRUSHLESS
DEWALT

BRUSHLESS MOTOR
Delivers 535 MWO
at 570 SFPM

LARGE CUT CAPACITY
86 x 86 mm
cut capacity

INTEGRATED BLADE GUARD
Helps minimize unwanted
contact with the blade
during operation

18V BRUSHLESS XR

FAST, EFFECIENT PERFORMANCE
Variable speed trigger and dial

DEWALT
XR
BLADE TRACKING
LED

LARGE CUT CPACAITY
86 x 86 mm

UP TO 120 CUTS PER CHARGE IN 12 GAUGE STRUT

NEW

18V XR METAL BANDSAW, DCS378

18V Brushless motor for extended durability, efficiency and power delivering 537W and a max no load speed of 171m/min. Variable speed giving ultimate speed and application control, 5 speed settings and variable speed trigger Class leading DEWALT ergonomics for maximised comfort and safety. Large cut capacity (86 mm) which is +32% compared to the existing DEWALT unit (DCS371) Tool free blade changing allows blades to be changed quickly and easily. Responsive and easily adjusted blade tracking.LED work-light for clear visibility. Retractable hanging hook for easy jobsite storage.Comes supplied as a bare unit in carton with 18TPI blade,

SPECIFICATIONS	
Power voltage	18V
Capacity cutting round	86 mm
Capacity cutting square	86 x 86 mm
Blade length	899 mm
Blade width	12 mm
Blade Speed (m/min)	0-174 m/min
Weight (without akku)	3,8 kg
Variable Speed Trigger	Yes

ART.NR.	PRODUCT DESCRIPTION
DCS378N-XJ	18V XR mid size bandsaw
DT8477-QZ	Accessory support 899 mm 18 TPI Portable Bandsaw Blade (3 pack)

230V 115 MM SLIM ANGLE GRINDER, DWE4036

Powerful 750W motor for fast and efficient cutting and grinding Ultra slim body grip for long use and comfort, only 172mm girth circumference 115mm diameter for quick and accurate cutting No-volt protection prevents accidental start-up, All metal gear casings, in new design, all die-cast gear housings. 2.5 meter of power cord attached Supplied with cutting and grinding guards for safety

SPECIFICATIONS	
Power	230 volt
Power input	750 W
No-load/rated speed	11800 min-1
Grinding wheel diameter	115 mm
Grinding wheel thickness (max)	6,4 mm
Spindle diameter	M14
Spindle length	18,5 mm
Weight	1,64 kg*

ART.NR.	PRODUCT DESCRIPTION
DWE4036-QS**	230V anglegrinder, 115mm, carton **

* weight includes side handle and guard
** DWE4036 comes supplied in carton with side handle, hex wrench, grinding guard and cutting guard

PERFORM PROTECT

18V XR

NEW

18V XR 115MM SAFETY ANGLE GRINDER, DCG413

18V Brushless motor for efficiency, improved application performance and power. Ergonomic slim housing with rubber over-mould for improved comfort and control Compact gear case for increased access to tight spaces and gives excellent cutting depth Paddle switch design for additional user safety. No Lock-on option. Constant Clutch and E-Clutch protects from kickbacks, cuts and wheel bursts Electronic Brake stops the wheel quickly when the trigger is released. Touch guard for quick and easy keyless adjustment

SPECIFICATIONS	
Power	18V
Power output	800 W
No-load/rated speed	9000 min-1
Wheel diameter	115 mm
Wheel thickness (max)	6 mm
Spindle diameter	M14
Spindle length	21,5 mm
Weight without akku	1,74 kg

ART.NR.	PRODUCT DESCRIPTION
DCG413N-XJ	18X XR angle grinder, 115 mm, deadmand switch, solo

* weight includes side handle and guard

DEWALT PROFFE
SAFETY GRINDERS WI

18V XR

NEW

DCG413

115 MM DISC-Ø

PERFORM PROTECT

18V XR

DCG406

125 MM DISC-Ø

PERFORM PROTECT

SAFETY FEATURES ON PERFORM&PROTECT CORDLESS 18V XR 115MM/125 MM ANGLEGRINDERS

KICKBACK BRAKE™

When a pinch, stall, or bind-up event is sensed, the electronic brake engages with maximum force to quickly stop the wheel, reduce the movement of the grinder, and shut the grinder off. The switch will need to be released then depressed to restart tool.

POWER-OFF™ OVERLOAD PROTECTION

The power supply to the motor will be reduced in case of motor overload. With continued motor overload, the tool will shut off. The switch will need to be released then depressed to restart tool. The tool will power off each time the current load reaches the overload current value (motor burn-up point). If continued overload shutdowns occur, apply less force/ weight on the tool until the tool will function without the overload engaging.

ESIONAL 18V XR TH DEADMAN SWITCH

LANYARD READY
18V XR
18V XR
PERFORMANCE

DCG406P2LRT

125 MM DISC-Ø

PERFORM PROTECT

DCG416VS

/VARIABLE SPEED VERSION

125 MM DISC-Ø

PERFORM PROTECT

SOFT START FEATURE

The soft start feature allows a slow speed build-up to avoid an initial jerk when starting. This feature is particularly useful when working in confined spaces.

NO-VOLT

The No-volt function stops the grinder restarting without the switch being cycled if there is a break in the power supply.

ELECTRONIC CLUTCH

The electronic torque limiting clutch reduces the maximum torque reaction transmitted to the operator in case of jamming of a disc. This feature also prevents the gearing and electric motor from stalling. The torque limiting clutch has been factoryset and cannot be adjusted.

RAW CORDLESS D

DEWALT
XR FLEX 54V
BRUSHLESS
WIRELESS TOOL CONTROL
PERFORM PROTECT
54V XR FLEX VOLT

EMOLITION POWER

DEWALT
18V XR FLEX 54V
DEWALT
DEWALT
WITH DEWALT
THE TOUGH GET TOUGHER

DEWALT

XR FLEXVOLT

POWER OF CORDED | FREEDOM OF CORDLESS™

ASSORTMENT OF 54V XR CORDLESS SDS MAX/HEX HAMMERS FOR CONSTRUCTION

CHIPPING/DEMOLITION

6 KG

DCH832X2
SDS-MAX
54V 10.5J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

10 KG

DCH892X2
SDS-MAX
54V 19.4J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

12 KG

DCH911X3
SDS-MAX
54V 27.0J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

18 KG

DCH966Z2
SDS-HEX (28 MM)
54V 41.0J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

COMBI HAMMERS

40 MM

DCH481X2
SDS-MAX
54V 6.1J

54V XR FLEXVOLT

PERFORM PROTECT

45 MM

DCH614X2
SDS-MAX
54V 10.5J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

48 MM

DCH735X2
SDS-MAX
54V 13.3J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

52 MM

DCH775Y2
SDS-MAX
54V 19.4J

WIRELESS TOOL CONTROL
54V XR FLEXVOLT

All Hammers are a part of the Perform&Protect program.

DEWALT
100 YEARS
WIRELESS TOOL CONTROL
PERFORM PROTECT
54V XR FLEXVOLT

41 JOULES of **IMPACT ENERGY**†

†ACCORDING TO EPTA-PROCEDURE 05-2009

NEW

54V XR FLEXVOLT 28 MM HEX DEMOLITION HAMMER, DCH966

The brushless motor offers increased runtime and durability with reduced maintenance. The hammer has a low vibration level at 6.1m/s^2, minimising user fatigue and increasing productivity. Floating mechanism for fully encased vibration reduction. Class leading 41 joules of impact energy. Wireless Tool Control transmitter which allows the tool to be wirelessly paired with another Wireless Tool Control device, such as a dust extractor, for automatic activation and shut down. Smaller and less intrusive tool holder offers reduced weight and improved chisel visibility. Removeable side handles ideal for trench work. 28 mm HEX toolholder for a wide variety of readily available accessories. LED service indicator. Compatible with DWH052 dust extraction adapter for dust-free operation

SPECIFICATIONS	
Power voltage	54V
Chisel Positions	1
Impact Energy (EPTA)	41J
No-Load BPM	1080
Weight (without akku)	18.5
Length	770 mm
Vibration Control	6.1m/s^2
Wireless Tool Control	Yes
Brushless Motor	Yes

ART.NR.	PRODUCT DESCRIPTION
DCH966Z2-QW*	28 mm HEX demolition hammer, 41 joules
Recommended accesories for the demolition hammer:	
DWH052-XJ	Dust adapter
DT6927-QZ	Hexagon point chisel, 28 mm
DT6929-QZ	Cold chisel, 28 mm
DT6932-QZ	Scalling chisel, 28 mm

* This version comes supplied in carton with 2 x DCB549 15 Ah Flexvolt batteries, DCB118 8A charger, auxiliary handle and 28 mm hex chisel

DEWALT®

CONCRETE TOTAL SOLUTIONS™

STREAMLINE THE DEMOLITION JOB

Take on trenching, slab removal, rebar inspection, wall breaching, and more with the right equipment for rigorous jobs. A DEWALT® lineup delivers concrete crushing power, innovation, and expertise.

GUARANTEED TOUGH®

HIGH IMPACT SDS MAX CHISELS

CAT #	DESCRIPTION
DT6889-QZ	SDS MAX 400 mm pointed chisel
DT6932-QZ	SDS HEX 28 mm Scaling chisel 76 x 520 mm
DT6812-QZ	SDS MAX flat chisel 400 x 25 mm

SUGGESTED TOOLS FOR WALL BREACHING

CAT #	DESCRIPTION
DCS691X2-QW	54V XR 230 mm cut off saw, WTC, 2 X 9,0 Ah
DT40260-QZ	230 mm Extreme Runtime diamond blade
DCH911X3-QW	54V XR SDS MAX demolition hammer, 27 J, WTC, 12 kg, 3 x 9,0 Ah
DWH051-XJ	Large hammer dust extraction - chiseling
DWV905H-QS	38 L Construction extractor, H-class
DT6889-QZ	SDS MAX Pointed chisel 400 mm

SUGGESTED TOOLS FOR WALL REINFORCEMENT

CAT #	DESCRIPTION
DCN890P2-QW	18V XR concrete nailer 2 x 5,0 Ah
DCN8903027	XH Nails 27 mm length, headsize 6,3 mm (for DCN890)
DWHT36928-0	TOUGHSERIES™ 8 mt premium tape

SUGGESTED TOOLS FOR REBAR REPLACEMENT

CAT #	DESCRIPTION
DCH966Z2-QW	54V XR SDS HEX demolition hammer, 41 J, WTC, 2 x 15,0 Ah
DT6929-QZ	Demolition cold chisel 36 x 520 mm SDS HEX
DWH052-XJ	Demolition SDS HEX Hammer Dust Extraction
DCH614X2-QW	54V XR SDS-MAX combo hammer, P&P, 10,5 J, WTC, 45 mm, 2 X 9,0 Ah batteries
DT60820-QZ	Elite SDS MAX drill 22 x 400 mm (working length)
DWH050-XJ	Dust extraction system & hole cleaning
DWV905H-QS	38 L Construction extractor, H-class
DCS691X2-QW	54V XR 230 mm cut of saw, WTC, 2 x 9,0 Ah
DT40255-QZ	230 mm Extreme Metal Cutting Disc

SUGGESTED TOOLS FOR WALL BRACE INSTALLATION

CAT #	DESCRIPTION
DCF900P2G-QW	18V XR High torque impact wrench, 1/2", 1396 Nm, 2 x 5.0 Ah batteries
DT60230-QZ	Extreme 16 mm SDS MAX hollow drill bit
DCH614X2-QW	54V XR FV SDS-MAX combo hammer, P&P, 10,5 J, WTC, 45 mm, 2 X 9,0 Ah batteries
DWV905H-QS	38L Construction extractor, H-class
DWH050-XJ	Dust extraction system & hole cleaning

SUGGESTED TOOLS FOR OVERPOUR REMOVAL

CAT #	DESCRIPTION
DCH966Z2-QW	54V XR SDS HEX Demolition Hammer, 41 J, WTC, 2 x 15,0Ah
DT6929-QZ	Demolition cold chisel 36 x 520 mm SDS HEX (28 mm)
DWH052-XJ	Demolition SDS HEX Hammer Dust Extraction
DWV905H-QS	38 L Construction extractor, H-class

***The above mentioned products and accessories for the hammers can be found in various dimensions, and sizes. Please look into the assortment to find the correct dimensions and products which fits your application.**

Learn more

ULTIMATE SAFETY. MAXIMUM PRODUCTIVITY.

PERFORM PROTECT

RECOMMENDED CONSTRUCTION H-CLASS VACUM CLEANER TO WORK WITH THE SDS MAX/HEX HAMMERS

AIR LOCK

DUST

WIRELESS TOOL CONTROL

AUTOMATIC FILTER CLEANING

PULSES EVERY 30 SECONDS

H **WARNING:** This machine contains dust hazardous to health. Emptying and maintenance operations, including removal of the dust collection means, must only be carried out by authorised personnel wearing suitable personal protection. Do not operate without the full filtration system fitted. H

REMEMBER TO PURCHASE THE STORAGE RACK ATTACHMENT TO DEWALT 230V VACUMCLEANER DWV9510

TOUGHSYSTEM® 2.0

TSTAK™

NEW

230V PREMIUM H-CLASS DUST EXTRACTOR, DWV905H

This industrial dust extractor cleaner is intended for wet and dry vacuum cleaning applications. This appliance can be used as industrial vacuum cleaner and dust extractor for mobile operations to take up all types of dry, non-combustible dusts up to dust Class H with limit values for occupational exposure smaller than 0.1 mg/m². Dual cannister filters with auto filter clean mechanism maintains unit performance during tough construction applications. Variable suction dial allows user to tailor suction to specific application or tool requirements. Large 38L tank capacity reduces unnecessary unit downtime. Heavy duty 3 mm polypropylene head & tank are impact & drop resistant for use in tough applications. The DEWALT H-VAC are not suitable for Asbestos removal. Airlock compatible for quicker/more secure dust extraction and improved connection/performance.The vacuum cleaner is storage box (Toughsystem and Tstak) compatibility with vac rack adaptor DWV9510-XJ (to be bought separately)

SPECIFICATIONS	
Input power	1400 W
Filter Class (EN60335-2-69)	H-Class
Airflow (L/S) manual	75 L/S
Pressure	250 mbar
Tank Capacity	38L
Filling quantity (liquid)	18,4 ltr
Dual Cannister Filters + Automatic Filter Cleaning	Yes
Filters used for H-vac (2 pcs)	DWV9345-XJ
Weight	15.0 kg
Vacum storage rack adapter fits H-vacum cleaner	DWV9510-XJ

ART.NR.	PRODUCT DESCRIPTION
DWV905H-QS	38L CONSTRUCTION DUST EXTRACTOR H-CLASS

* DWV905H Kit Includes DWV905 dust extractor, 2 X H-class compliant filters, 4.6M anti-static hose, stepped rubber airlock adapter, 32 mm airlock adapter, fleece dust bag, packed In carton.

DEWALT
100 YEARS
WIRELESS TOOL CONTROL
PERFORM PROTECT

41 JOULES OF IMPACT ENERGY†

†ACCORDING TO EPTA-PROCEDURE 05-2009

NEW

230V 28 MM HEX DEMOLITION HAMMER, D25966

Brushless motor offers increased durability with reduced maintenance. The hammer has a low vibration level at 6.8m/s^2, minimizing user fatigue and increasing productivity. Floating mechanism for fully encased vibration reduction. Class leading 41 joules of impact energy. Wireless Tool Control transmitter which allows the tool to be wirelessly paired with another Wireless Tool Control device, such as a dust extractor, for automatic activation and shut down Smaller and less intrusive tool holder offers reduced weight and improved chisel visibility. Removeable side handles ideal for trench work. 28 mm HEX toolholder for a wide variety of readily available accessories. LED service indicator. Compatible with DWH052 dust extraction adapter for dust-free operation

SPECIFICATIONS	
Power voltage	230V
Chisel Positions	1
Impact Energy (EPTA)	41J
No-Load BPM	1080
Input power	1800 W
Weight	18.8
Length	770 mm
Vibration Control	6.1m/s^2
Wireless Tool Control	Yes
Brushless Motor	Yes

ART.NR.	PRODUCT DESCRIPTION
D25966-QS	28 mm Hex demolition hammer*
Recommended accesories for the demolition hammer:	
D259811-XJ	Trolly to carry the hammer
DWH052-XJ	Dust adapter
DT6927-QZ	Hexagon point chisel, 28 mm
DT6929-QZ	Cold chisel, 28 mm
DT6932-QZ	Scalling chisel, 28 mm

* supplied in carton with auxiliary handle and 28 mm hex chisel

230V ASSORTMENT OF SDS MAX/HEX HAMMERS FOR CONSTRUCTION

COMBO HAMMERS SDS MAX

SDS® max
PART OF THE DEWALT® SDS MAX HAMMER FAMILY

6.1 JOULE
D25481K-QS
40 MM-Ø
1050W
PERFORM PROTECT

10.5 JOULE
D25614K-QS
45 MM-Ø
1350W
PERFORM PROTECT

CHIPPING/DEMOLTION HAMMERS SDS MAX

7.1 JOULE
D25810K-QS
1050W
PERFORM PROTECT

17.5 JOULE
D25881K-QS
1600W

10.5 JOULE
D25832K-QS
1350W
PERFORM PROTECT

27 JOULE
D25911K-QS
1700W
PERFORM PROTECT

13.3 JOULE
D25872K-QS
1350W
PERFORM PROTECT

SDS® max
PART OF THE DEWALT® SDS MAX HAMMER FAMILY

COMBO HAMMERS SDS MAX

13.3 JOULE
D25733K-QS
48 MM-Ø
1600W

19.4 JOULE
D25773K-QS
52 MM-Ø
1700W

DEMOLITION HAMMERS SDS HEX

41 JOULE
D25966-QS
1800W

62 JOULE
D25981K-QS
2100W
INCL. TROLLEY

62 JOULE
D25981-QS
2100W

D259811-XJ
TROLLEY FOR
PAVEMENT
BREAKER AND
DEMO HAMMERS

54V XR FLEXVOLT

WIRELESS TOOL CONTROL

PERFORM PROTECT

NEW

54V XR FLEXVOLT SDS-PLUS ROTARY HAMMER, DCH416

Category-leading high speed drilling performance at more than 74 holes (18mm Ø x 80mm) per charge. Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications. Rotation stop mode for light chiseling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal. Brushless motor with high capacity XR FLEXVOLT 9.0Ah 18V/54V Lithium-ion battery platform for extreme runtime and reduced maintenance. Perform & Protect: best-in-class vibration at $6.3 m/s^2$, minimising user fatigue. Bright white LED with delay feature improves visibility. Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 32mm. An anti rotation system detects a loss of tool control, and reacts by instantly cutting the power. Wireless Tool Control transmitter which allows the tool to be wirelessly paired with another Wireless Tool Control device, such as a dust extractor, for automatic activation and shut down.

SPECIFICATIONS	
Power	54V
Single Impact Energy (J)	4,5 (EPTA 05/2009)
Tool Holder	SDS Plus®
Max Drilling range in steel/wood/ concrete (mm)	13/32/32 mm
Max Diameter for cores (mm)	127 mm
Wireless Tool Control (WTC)	Yes
Perform&Protect features	Low vibration $6.7 m/s^2$, WTC
Weight without akku (kg)	4,1 kg

ART.NR.	PRODUCT DESCRIPTION
DCH416NT-XJ	54V XR FLEXVOLT SDS-PLUS ROTARY HAMMER, SOLO TSTAK

ULTIMATE SAFETY.
MAXIMUM
PRODUCTIVITY.

PERFORM PROTECT™

WIRELESS TOOL CONTROL™

DUST™

AUTOMATIC FILTER CLEANING
PULSES EVERY 30 SECONDS

EXTRA IN THE KIT
+ DWV9350-XJ
(FLOOR CLEANING KIT) +DWV9402-XJ
(FLECCE DUST BAG- 5 PACK)

NEW

230V PREMIUM M-CLASS DUST EXTRACTOR, DWV905MKIT

This industrial dust extractor cleaner is intended for wet and dry vacuum cleaning applications.This appliance can be used as industrial vacuum cleaner and dust extractor for mobile operations to take up all types of dry, non-combustible dusts up to dust Class M with limit values for occupational exposure greater than or equal to 0.1 mg/m^3. Dual cannister filters with auto filter clean mechanism maintains unit performance during tough construction applications. Variable suction dial allows user to tailor suction to specific application or tool requirements. Large 38L tank capacity reduces unnecessary unit downtime. Heavy duty 3mm polypropylene head & tank are impact & drop resistant for use in tough applications. Airlock compatible for quicker/more secure dust extraction and improved connection/performance. The vacuum cleaner is storage box (Toughsystem and Tstak) compatibility with vac rack adaptor DWV9510-XJ (to be bought separately)

SPECIFICATIONS	
Input power	1400 W
Filter Class (EN60335-2-69)	M-Class
Airflow (L/S) manual	75 L/S
Pressure	250 mbar
Filling quantity (liquid)	18,4 ltr
Dual Cannister Filters +Automatic Filter Cleaning	Yes
Filters used for M-vac (2 pcs)	DWV9340-XJ
Weight	15.0 KG
Vacum storage rack adapter fits H-vacum cleaner	DWV9510-XJ

ART.NR.	PRODUCT DESCRIPTION
DWV905MKIT-QS	38L M CLASS DUST EXTRACTOR* INCL KIT, DWV9350-XJ, DWV9402-XJ*

*DWV905M Kit Includes DWV905 dust extractor, 2 X M-class compliant filters, 4.6M anti-static hose, Stepped rubber airlock adapter, 32mm airlock adapter, Fleece dust bag, Packed In carton.
** DWV9350-XJ (Floor cleaning kit) + DWV9402-XJ (Flecce dust bag- 5 PACK)

2x****
LIFESPAN
NEW
5AH
DEWALT
POWERSTACK™
BATTERY TECHNOLOGY

****Charge cycles vs. DEWALT DCB184 battery.

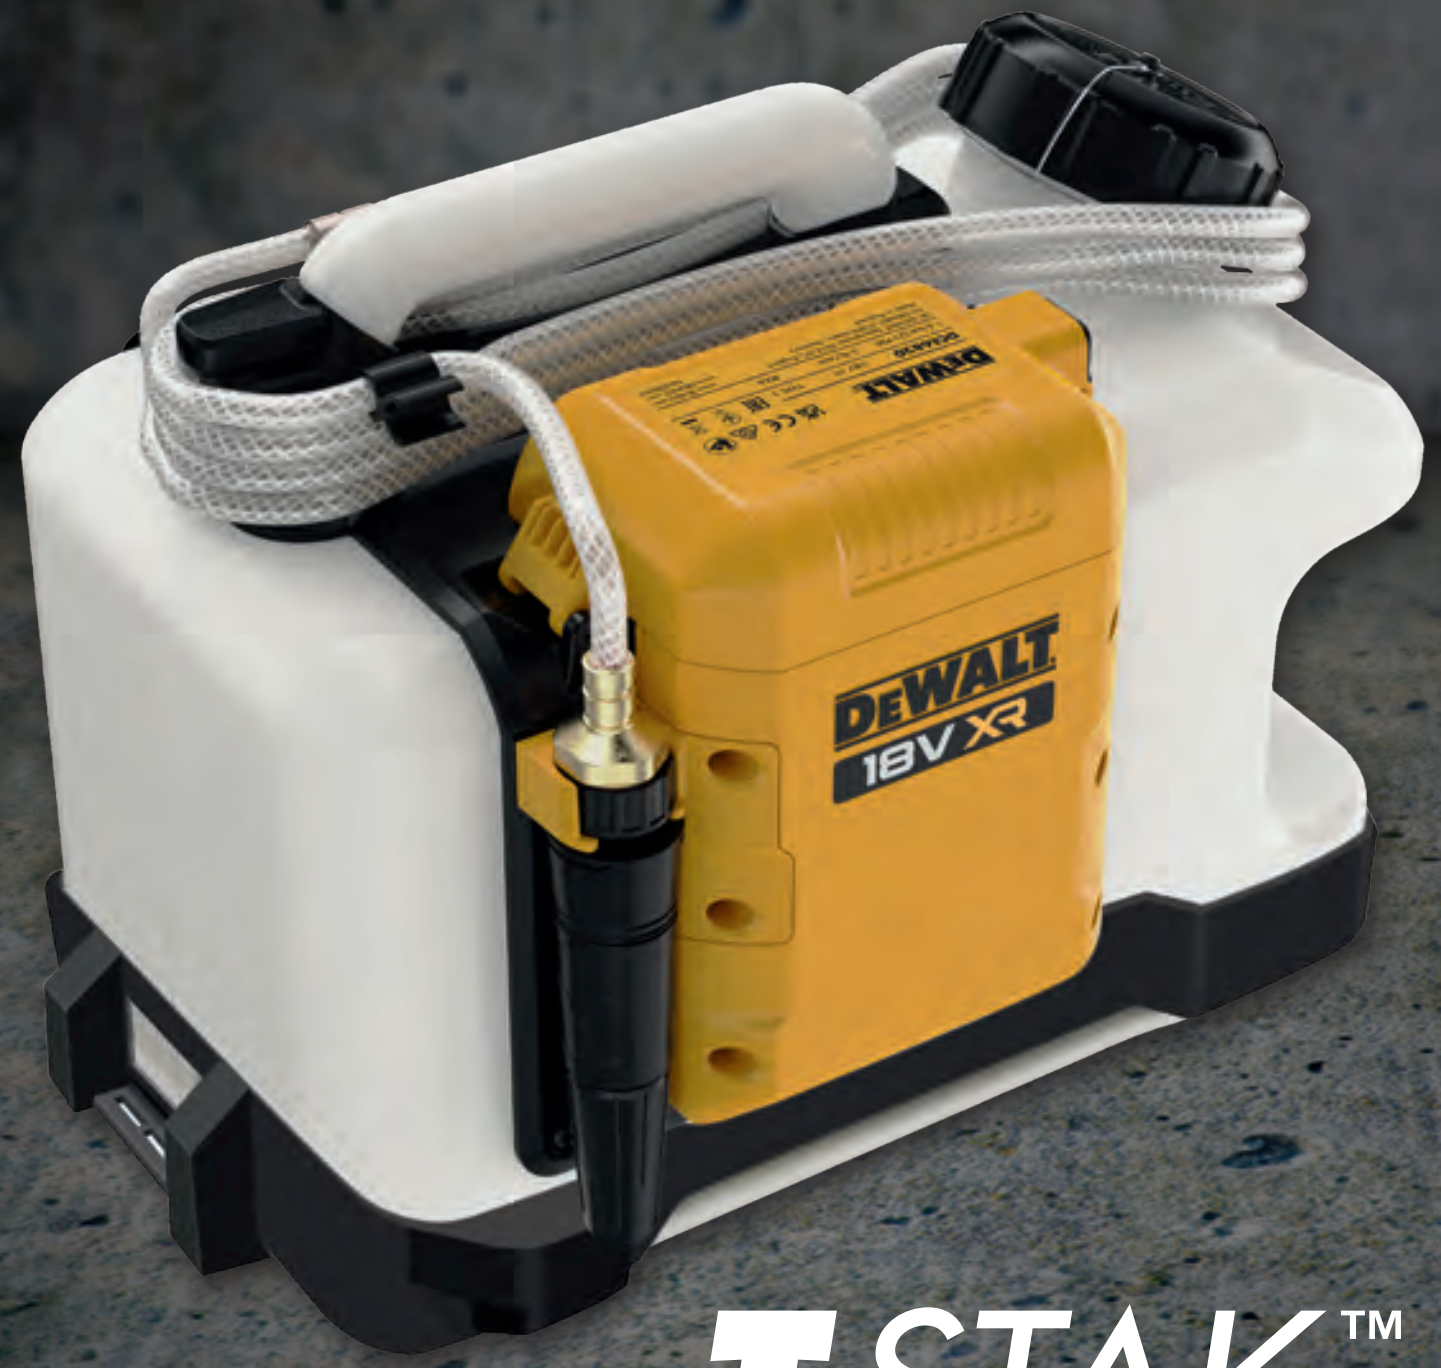

SUITABLE
FOR DIAMOND
CUTTING TOOLS
LIKE DCS691

T STAK™

18V XR

NEW

18V XR WATER TANK, DCE6820

The 18V battery powered water tank provides 15L of steady water flow without having to be manually pressurised.
The easy-to-use control panel allows the user to turn on the water supply quickly, no manual pumping required.
With two large handles, the water tank is very comfortable to move around .
Wireless Tool Control allows direct connection which provides increased runtime and improves efficiency.
Compatible with DEWALT T STAK storage for increased mobility on the jobsite. Gardena® / Hozelock style hose fitment, so widely available connections and connectivity.
Ideal for use with DCS691 Cut-Off Saw.
This version comes as solo in a carton with wireless key fob.

SPECIFICATIONS	
Power	18V
Max water capacity (Ltr)	15 Ltr
Max water temperature (°C)	40°C
Min water temperature (°C)	0°C
Dimensions (L*W*H) (mm)	434x307x330 mm
Max water pressure (bar)	1,6 bar
Hose outer diameter (mm)	10 mm
Hose inner diameter (mm)	6 mm
Hose length (mtr)	3 mtr
Protection class	IPX4

ART.NR.	PRODUCT DESCRIPTION
DCE6820N-XJ	18V XR WATER TANK, SOLO

DEWALT
18V XR BRUSHLESS
XR
18V 5AH
POW
STA
XR
OUR
PERF
18
POWE

LITHIUM ION
DEWALT
XR
8AH
WER
ACK
XR
R BEST
FORMING
3V
ER TOOLS
DEWALT
18V XR BRUSHLESS
BRUSHLESS
DEWALT
XR
DEWALT
EXTREME
24T
XR EXTREME RUNTIME
DEWALT
BRUSHLESS
DEWALT
XR

NEW

18V XR CORDLESS 12 MM & 8 MM PLUNGE ROUTER

18V XR

WIRELESS TOOL CONTROL

UP TO
78 LINEAR METRES
RUNTIME
PER CHARGE¹
COLLECTS UP TO
97%
OF DUST¹
DEWALT
V XR BRUSHLESS
PERFORM
PROTECT™
ANTI-ROTATION

EASY ADJUSTMENT

VARIABLE SPEED 11,000 – 23,000 RPM

ANTI ROTATION CONTROL

SHUT UNIT DOWN IN EVENT OF KICKBACK

WIRELESS
TOOL CONTROL™

DIRECT AIRLOCK DUST PORT

INCL WIRELESS TOOL CONTROL

ADVANCED MODULE

WITH PACK IDENTIFICATION DELIVERS MORE POWER WHEN PAIRED WITH A 5AH POWERSTACK OR FLEXVOLT BATTERY

SPECIAL DUST ADAPTER

FOR EDGE ROUTING INCLUDED IN THE KIT

PLUNGE LOCK LEVER

QUICKLY LOCK PLUNGE WITH APPLYING FORCE TO THE ROUTER

DEWALT® ANNOUNCES NEW 18V XR CORDLESS 12 MM & 8 MM PLUNGE ROUTER

New DEWALT router can complete up to 78 linear metres routing 15.9 mm roundovers in pine on a single charge using DCBP518 Powerstack battery.

"Carpenters will now be able to complete large, demanding routing applications without the hassle of a cord," said Niclas Andersen, Nordic DEWALT senior trade marketing manager.
"From flawless edgework to powerful plunge cuts, the DCW620 Router delivers control, versatility and portability for optimal productivity."
The DEWALT DCW620 Router also features powerful DEWALT Brushless
motor that effortlessly handles router bits up to 63 mm in diameter and Pack ID Technology that allows this tool to deliver more power when paired with a 18V XR POWERSTACK or XR FLEXVOLT battery.
A 70 mm plunge depth allows you to complete more applications and It is equipped with a plunge lock lever, an adjustable 3-position turret stop, a tool-free depth adjustment system and a spindle lock for fast and accurate setup.
Additional features of the newly released DEWALT 18V XR Cordless 12mm/8mm Router includes integrated dust collection with Airlock™ compatibility and built in Wireless Tool Control to provide incredible dust management. The Perform & Protect™ Anti-Rotation™ System senses the rotational motion of the tool and shuts it down if the motion is excessive to protect the user.

DEWALT
DCW620
PERFORM
PROTECT

70 MM PLUNGE DEPTH

INTEGRATED DUST EXTRACTION

– NO ADDITIONAL DUST CHUTE, BETTER VISIBILITY

OTHER CORDLESS 18V ROUTER SOLUTIONS FROM DEWALT, DCW604

NEW

ROUTER BIT ACESSORY KITS FROM DEWALT

DT90016-QZ - 12 PCS ROUTER SET (8 MM)

DT90017-QZ 22 PCS ROUTER SET (8 MM)

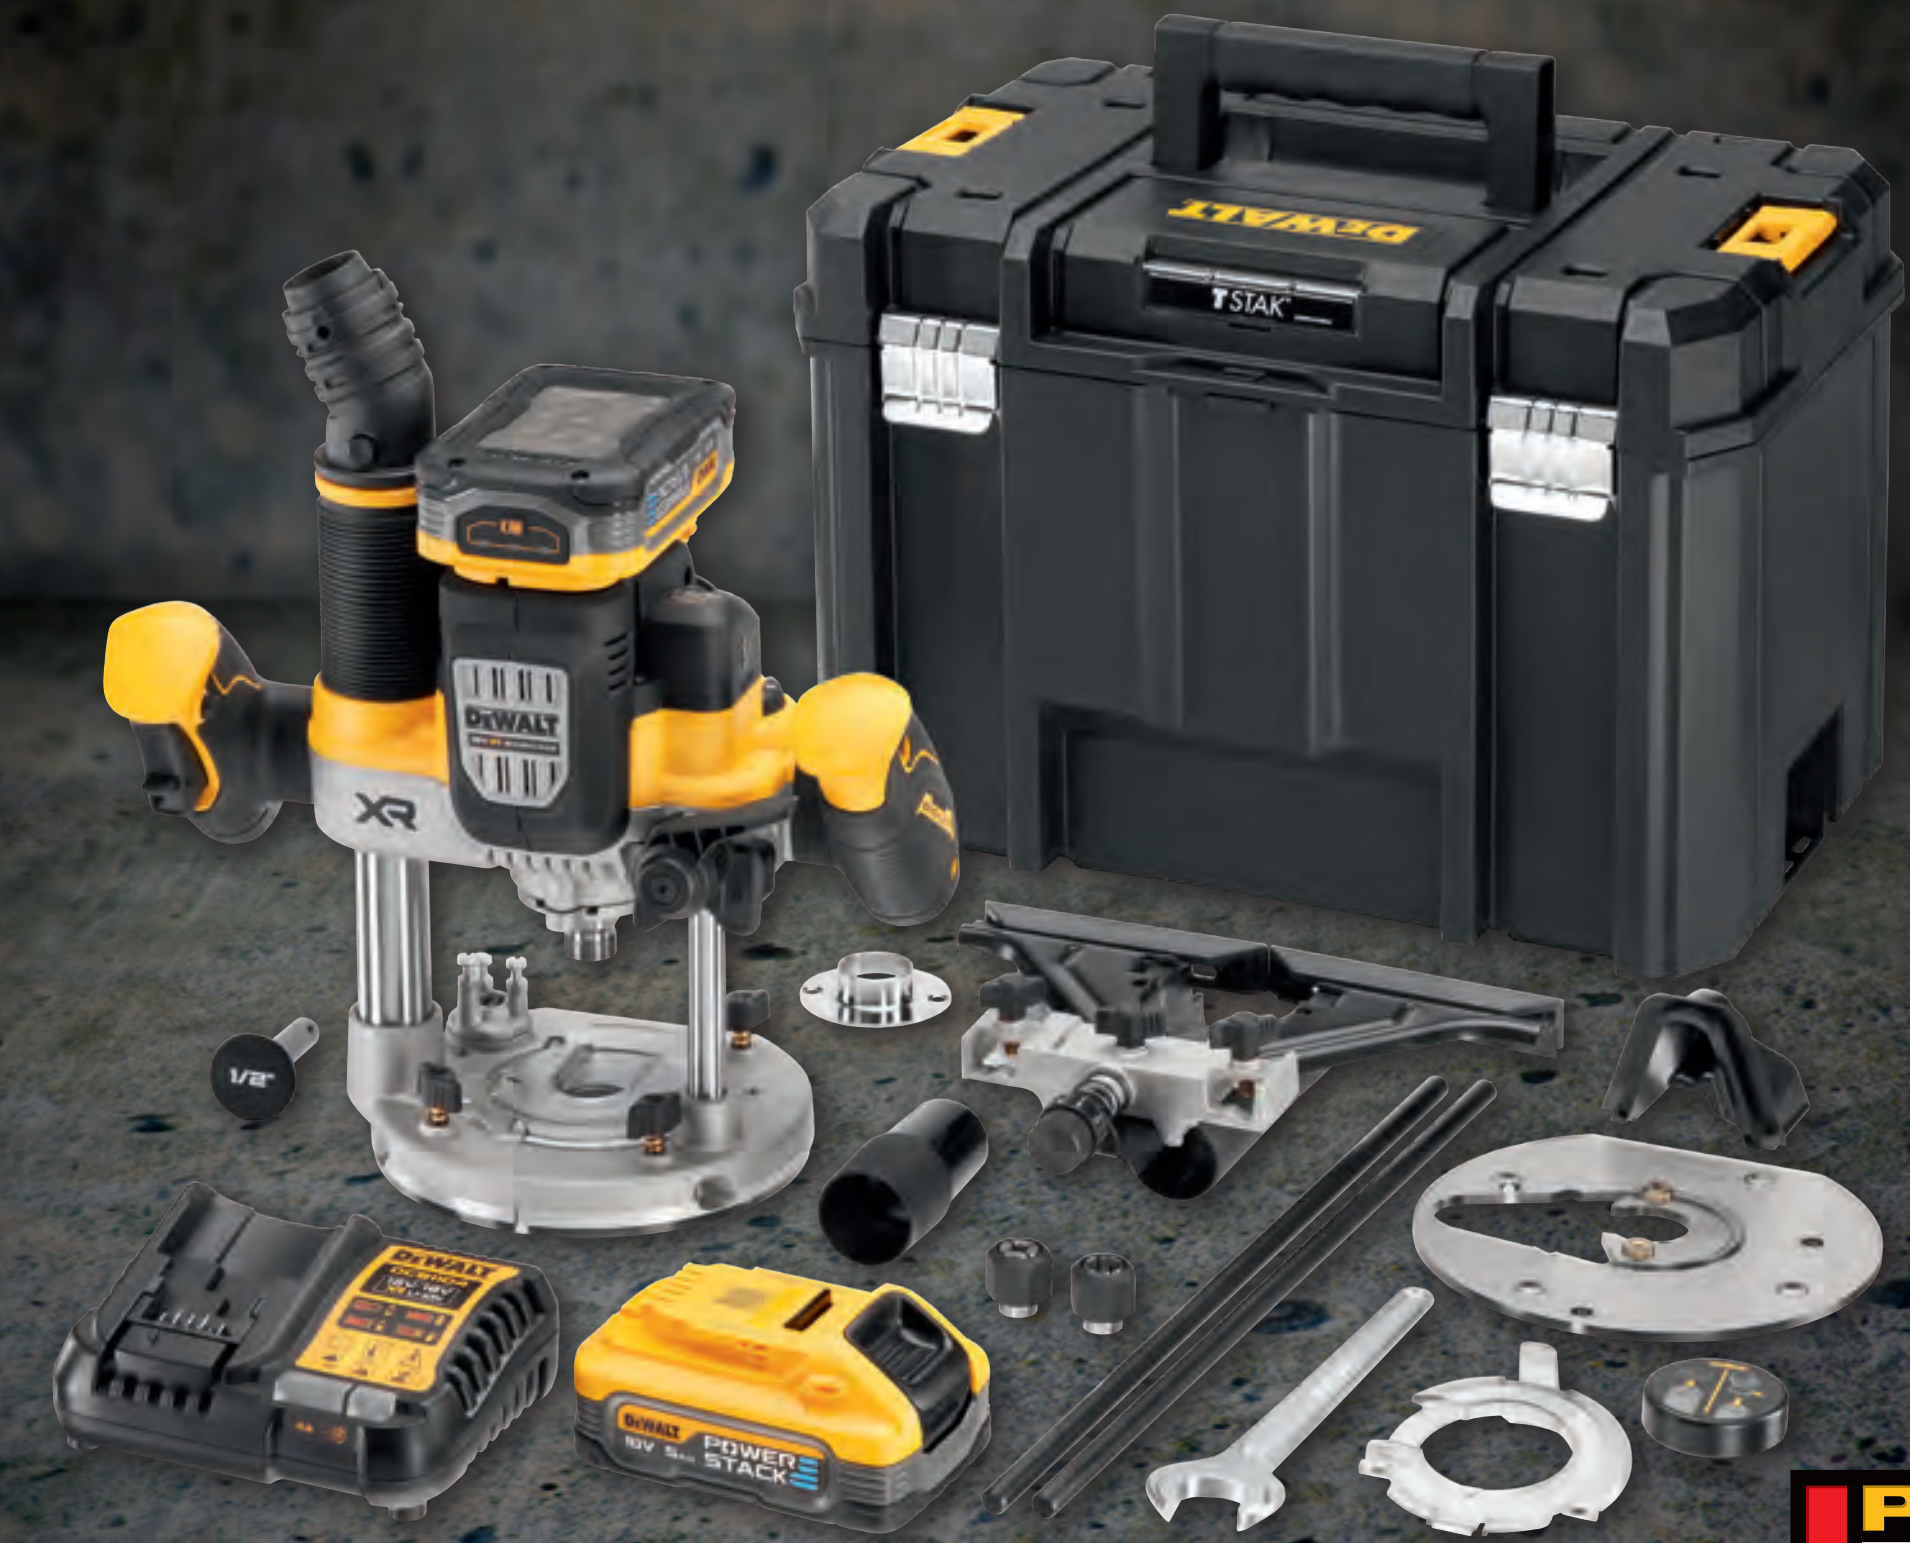

PERFORM PROTECT

18V XR

WIRELESS TOOL CONTROL

ANTI-ROTATION

NEW

18V XR 8/12MM PLOUNGE ROUTER, DCW620

Our first cordless 12 and 8mm Plunge Router unlocks even more applications for the professional carpenter using the 18V XR system. A powerful DEWALT Brushless motor and Pack ID Technology allows this tool to deliver more power when paired with an 18V XR POWERSTACK or XR FLEXVOLT battery. A 70mm plunge depth allows you to complete more applications while an ergonomic trigger switch, plunge lock lever, and variable speed deliver consistent accuracy and versatility on site. The integrated dust extraction, AirLock compatibility and built in Wireless Tool Control provide incredible dust management.

SPECIFICATIONS	
Power	18V
No-load speed (min-1)	11000 – 23000 min-1
Plunging stroke (mm)	70 mm
Max. Bit diameter (mm)	63 mm
Collet size	8 mm and 12 mm
Weight without akku (kg)	3,62 kg
Perform & Protect feature	Anti rotation function, Wireless Tool Control, Overload protection

ART.NR.	PRODUCT DESCRIPTION
DCW620NT-XJ	18V XR 8/12MM PLOUNGE ROUTER, TSTAK SOLO*
DCW620H2-QW	18V XR 8/12MM PLOUNGE ROUTER, TSTAK, 2 X DCBP518**

*NT version come bare unit supplied with: 8mm & 12mm collets, 30mm guide bush, side fence/rods, centering cone, 2 sub-bases (guide bush and larger aperture), wrench, airlock dust port and under base dust chute in a deep TSTAK box **H2 version comes supplied with 2 x DCBP518 5Ah Powerstack batteries, DCB1104 charger, 8mm & 12mm collets, 30mm guide bush, side fence/rods, centering cone, 2 sub-bases (guide bush and larger aperture), wrench, airlock dust port and under base dust chute in a deep TSTAK box

DEWALT
18V XR BRUSHLESS
33°
DNPT NAIL
DNW NAIL
DEWALT
5 AH
18V
18V XR

NEW

18V XR 33° FRAMING NAILER, DCN930

SEQUENTIAL TO CONTACT TRIP (BUMPFIRE)

DEWALT
18V XR BRUSHLESS
XR
18
5 AH
18V XR

NEW

18V XR 33° FRAMING NAILER, DCN950

SEQUENTIAL TO RAPID SEQUENTIAL

50% LONGER DEPTH CONTROL
12 mm versus 8mm (DCN692)

MORE POWERFULL ENGINE
with 72% more subflush, and
20% faster than DCN692

BUMP* AND SEQUENTIAL OPERATION
The sequential operating mode allows for precision placement and the bump operating mode provides the user with faster application speed
(*DCN930 only. DCN950 has sequential and rapid sequential modes)

NEW

18V XR 33° FRAMING NAILERS, DCN930/DCN950

400 mm

DEWALT
18V XR BRUSHLESS
33°
DNPT NAIL
DNW NAIL
BRUSHLESS
18V
5 AH

FITS BETWEEN 400 MM STUDS
Only 353mm long

BELT HOOK
New detachable and reversible
metal belt hook

EXTRA LONG MAGAZINE
(up to 95 nails) for DCN930/950 can be
purchased on this skunr DZN930-XJ.
Ideal for higher volume applications.
Less down time from re-loading

IMPROVED NAIL LOADING SYSTEM
Simply load the nails and then pull the pusher
over the nails to set.
Compatible with most paper tape nails on the
market and optimized for both DNPT (Paper
Tape) and DNW (Wire welded) nails

NEW

18V XR 33° FRAMING NAILER, BUMP/SEQUENTIAL MODE, DCN930

18V Brushless motor for extended durability, efficiency and power capable of driving flush 90mm ring shank nails on medium density wood. Mechanical rather than gas operation offers consistent performance at temperatures between -20 and 50 degrees Celsius and minimal cleaning/service requirements. Increased speed for faster nailing application both in contact (bump*) mode and sequential. Compatible with most paper tape nails on the market and optimized for both DNPT (Paper Tape) and DNW (Wire welded) nails. Supplied with a reversible belt hook and convenient rafter hook. Precise depth control through extended wheel regulation, Nose design optimized for toe-nailing. Increased driver lifespan. Tool free stall/jam clearance minimises user down time. Ergonomic tool design allows the nailer to fit easily between a 400mm centre stud. Robust magnesium magazine for lower weight and improved durability. Versatile 30 - 34 degree magazine angle will accept most clipped head, and off-centre round head paper tape or wire weld collated framing nails. Gas free operation offers a significant saving in running costs. Dry fire lockout ensures that the tool is protected from firing without nails in the magazine.

SPECIFICATIONS	
Power	18V
Actuating mode	Sequential/ Bump mode
Magazine angle	33°
Fasteners length (mm)	50–90 mm
Shank diameter (mm)	2.8–3.3 mm
Angle	30–34°
Head geometry	Clipped or offset round
Collation type	30–34° paper (DNPT) or wire welded (DNW)
Weight without akku	3,9 kg

ART.NR.	PRODUCT DESCRIPTION
DCN930N-XJ	18V XR 33° FRAMING NAILER, BUMP/SEQUENTIAL MODE, CARTON, SOLO
DCN930P2-QW	18V XR 33° FRAMING NAILER, BUMP/SEQUENTIAL MODE, CASE, DCB1104, 2 X DCB184
DZN930-XJ	EXTENDED MAGAZINE FOR DCN930/DCN950, UP TO 95 NAILS CAPACITY **

DCN930 (Bump/Sequential) is supplied as bare unit in branded carton, including no-mar tip, hex key and reversible belt hook.
** The magazine is available from January 2025.

NEW

18V XR 33° FRAMING NAILER, SEQUENTIAL/ RAPID SEQUENTIAL, DCN950

18V Brushless motor for extended durability, efficiency and power capable of driving flush 90mm ring shank nails on medium density wood. Mechanical rather than gas operation offers consistent performance at temperatures between -20 and 50 degrees Celsius and minimal cleaning/service requirements. Increased speed for faster nailing application both in contact (bump*) mode and sequential. Compatible with most paper tape nails on the market and optimized for both DNPT (Paper Tape) and DNW (Wire welded) nails. Supplied with a reversible belt hook and convenient rafter hook. Precise depth control through extended wheel regulation, Nose design optimized for toe-nailing. Increased driver lifespan. Tool free stall/jam clearance minimises user down time. Ergonomic tool design allows the nailer to fit easily between a 400mm centre stud. Robust magnesium magazine for lower weight and improved durability. Versatile 30 - 34 degree magazine angle will accept most clipped head, and off-centre round head paper tape or wire weld collated framing nails. Gas free operation offers a significant saving in running costs. Dry fire lockout ensures that the tool is protected from firing without nails in the magazine.

SPECIFICATIONS	
Power	18V
Actuating mode	Sequential to Rapid sequential
Magazine angle	33°
Fasteners length (mm)	50–90 mm
Shank diameter (mm)	2.8–3.3 mm
Angle	30–34°
Head geometry	Clipped or offset round
Collation type	30–34° paper (DNPT) or wire welded (DNW)
Weight without akku	3,9 kg

ART.NR.	PRODUCT DESCRIPTION
DCN950N-XJ	18V XR 33° FRAMING NAILER, SEQUENTIAL TO RAPID SEQUENTIAL, SOLO
DZN930-XJ	EXTENDED MAGAZINE FOR DCN930/DCN950, UP TO 95 NAILS CAPACITY **

DCN950N-XJ (Sequential + rapid sequential) is supplied as bare unit in branded carton, including no-mar tip, hex key and reversible belt hook.
** The magazine is available from January 2025.

18V XR SAWING TWIN KIT, DCK2012P2T

The perfect kit for the carpenter or the construction worker who wants to have his saws in one TSTAK box, and 2 pcs 5 Ah batteries and a charger, so it is possible to operate and shift between the products without shifting batteries.

DCS570 circular saw

- 184mm saw blade
- Brushless motor for increased runtime and performance
- 64mm depth of cut
- 0-57 degrees bevel adjustment
- Dust blower clears dust and debris from cut line
- LED work light for improved cut line visibility
- DEWALT AirLock system for easy, secure connection to extraction hose

DCS334 jigsaw:

- Brushless motor for increased runtime and performance
- Variable speed trigger & lock-off switch for quick controlled cuts and enhanced work safety
- 4-position pendulum action controls the aggressiveness or smoothness of cuts
- Tool free adjustable shoe with anti scratch cover bevels to 45 degrees in both directions
- Quick and easy keyless blade change system accepts T- shank blades
- LED worklight illuminates the work area when drill is in use
- Dust blower keeps cut line clear of dust and debris

ART.NR.	PRODUCT DESCRIPTION
DCK2012P2T-QW	18V XR 2 KIT DCS570, DCS334, 2X 5.0Ah, Charger, TSTAK

PROMOTION MODEL WITH 3 X 5.0 AH BATTERIES

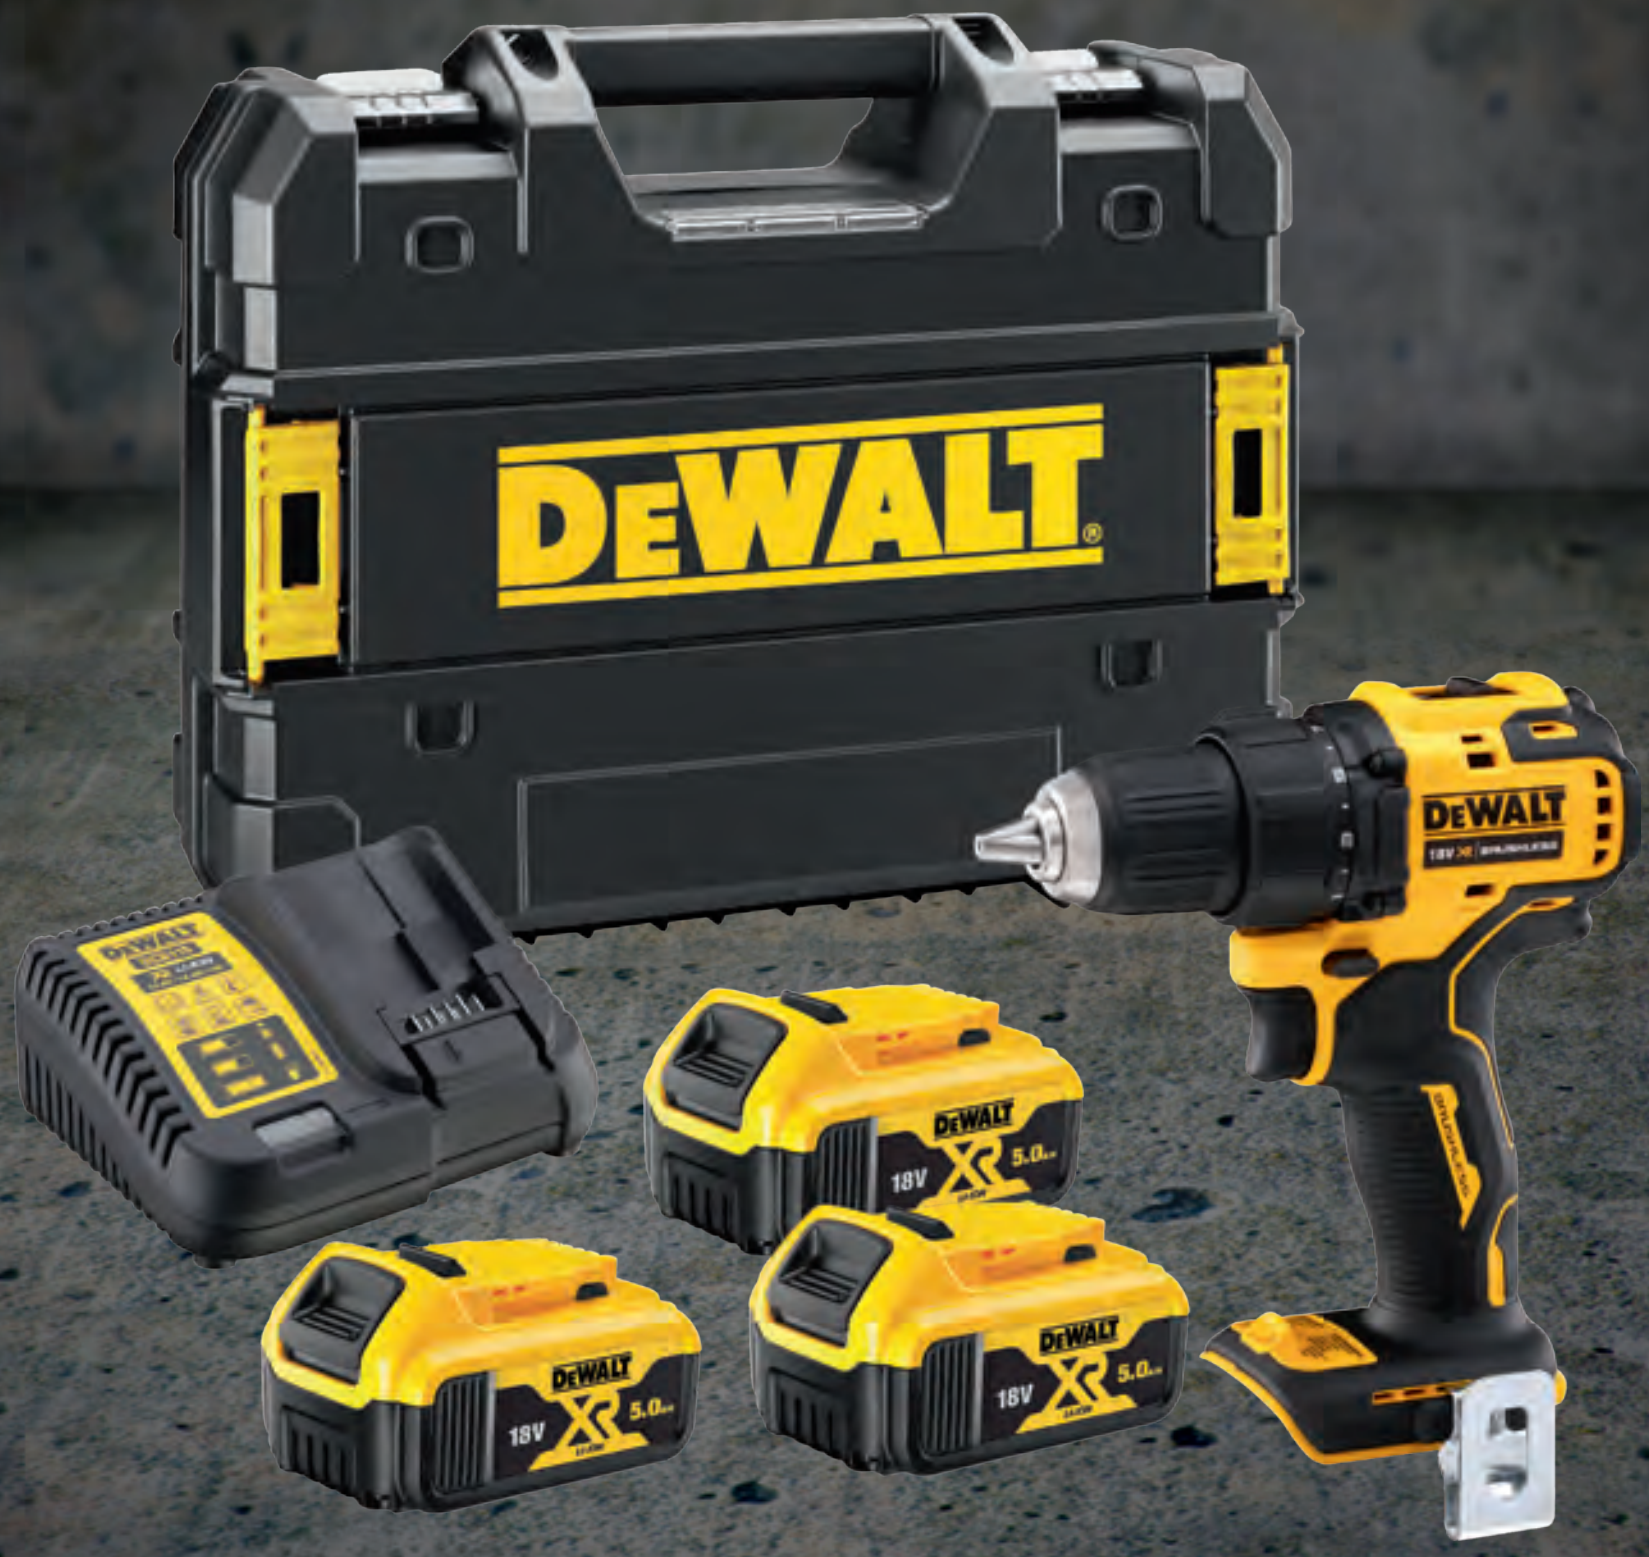

NEW

18V XR COMPACT DRILL DRIVER, DCD708P3T

The DEWALT brushless drill driver delivers 65Nm of torque in a 160mm long body for improved performance and runtime in the tightest spaces. Other features include a 2 speed all metal transmission, 15 torque settings for increased versatility in applications and a bright LED on the base of the tool for enhanced visibility. Foot LED with delay feature for better workpiece illumination.

SPECIFICATIONS	
Power	18V
No load speed	1 gear = 0–450 min-1 2 gear = 0–1650 min-1
Max. Torque	65 Nm
Chuck capacity	1.5–13 mm
Maximum drilling capacity	Wood = 30 mm Metal = 13 mm
Weight without akku	1,1 kg

ART.NR.	PRODUCT DESCRIPTION
DCD708P3T-QW	18V XR DRILLDRIVER,65 NM,TSTAK, 3X5, 0AH

NEW

18V XR 2 PACK COMBO KIT, DCK2051P2T

Ideal combo kit for construction and industry use. The kit includes one drilldriver DCD800 and one compact impact driver DCF850. Furthermore one 4A charger DCB1104, and two 5.0Ah batteries DCB184 packed in a TSTAK II storage box

SPECIFICATIONS

DCD800:	
Power	18V
No-load speed (min-1)	0–650/ 0–2000 min-1
Max. torque (hard/soft) (Nm)	90/27 Nm
Weight without akku (kg)	1,28 kg

DCF850:	
Power	18V
No load speed (rpm)	0–1000 (mode 1), 0–2800 (mode 2), 0–3250 (mode 3)
Impact rate (ipm)	0–3800 ipm
Max torque (Nm)	206,2 Nm
Weight without akku (kg)	0,95 kg

ART.NR.	PRODUCT DESCRIPTION
DCK2051P2T-QW	18V XR 2 KIT DCD800, DCF850, DCB1104, 2 X 5,0 AH, TSTAK

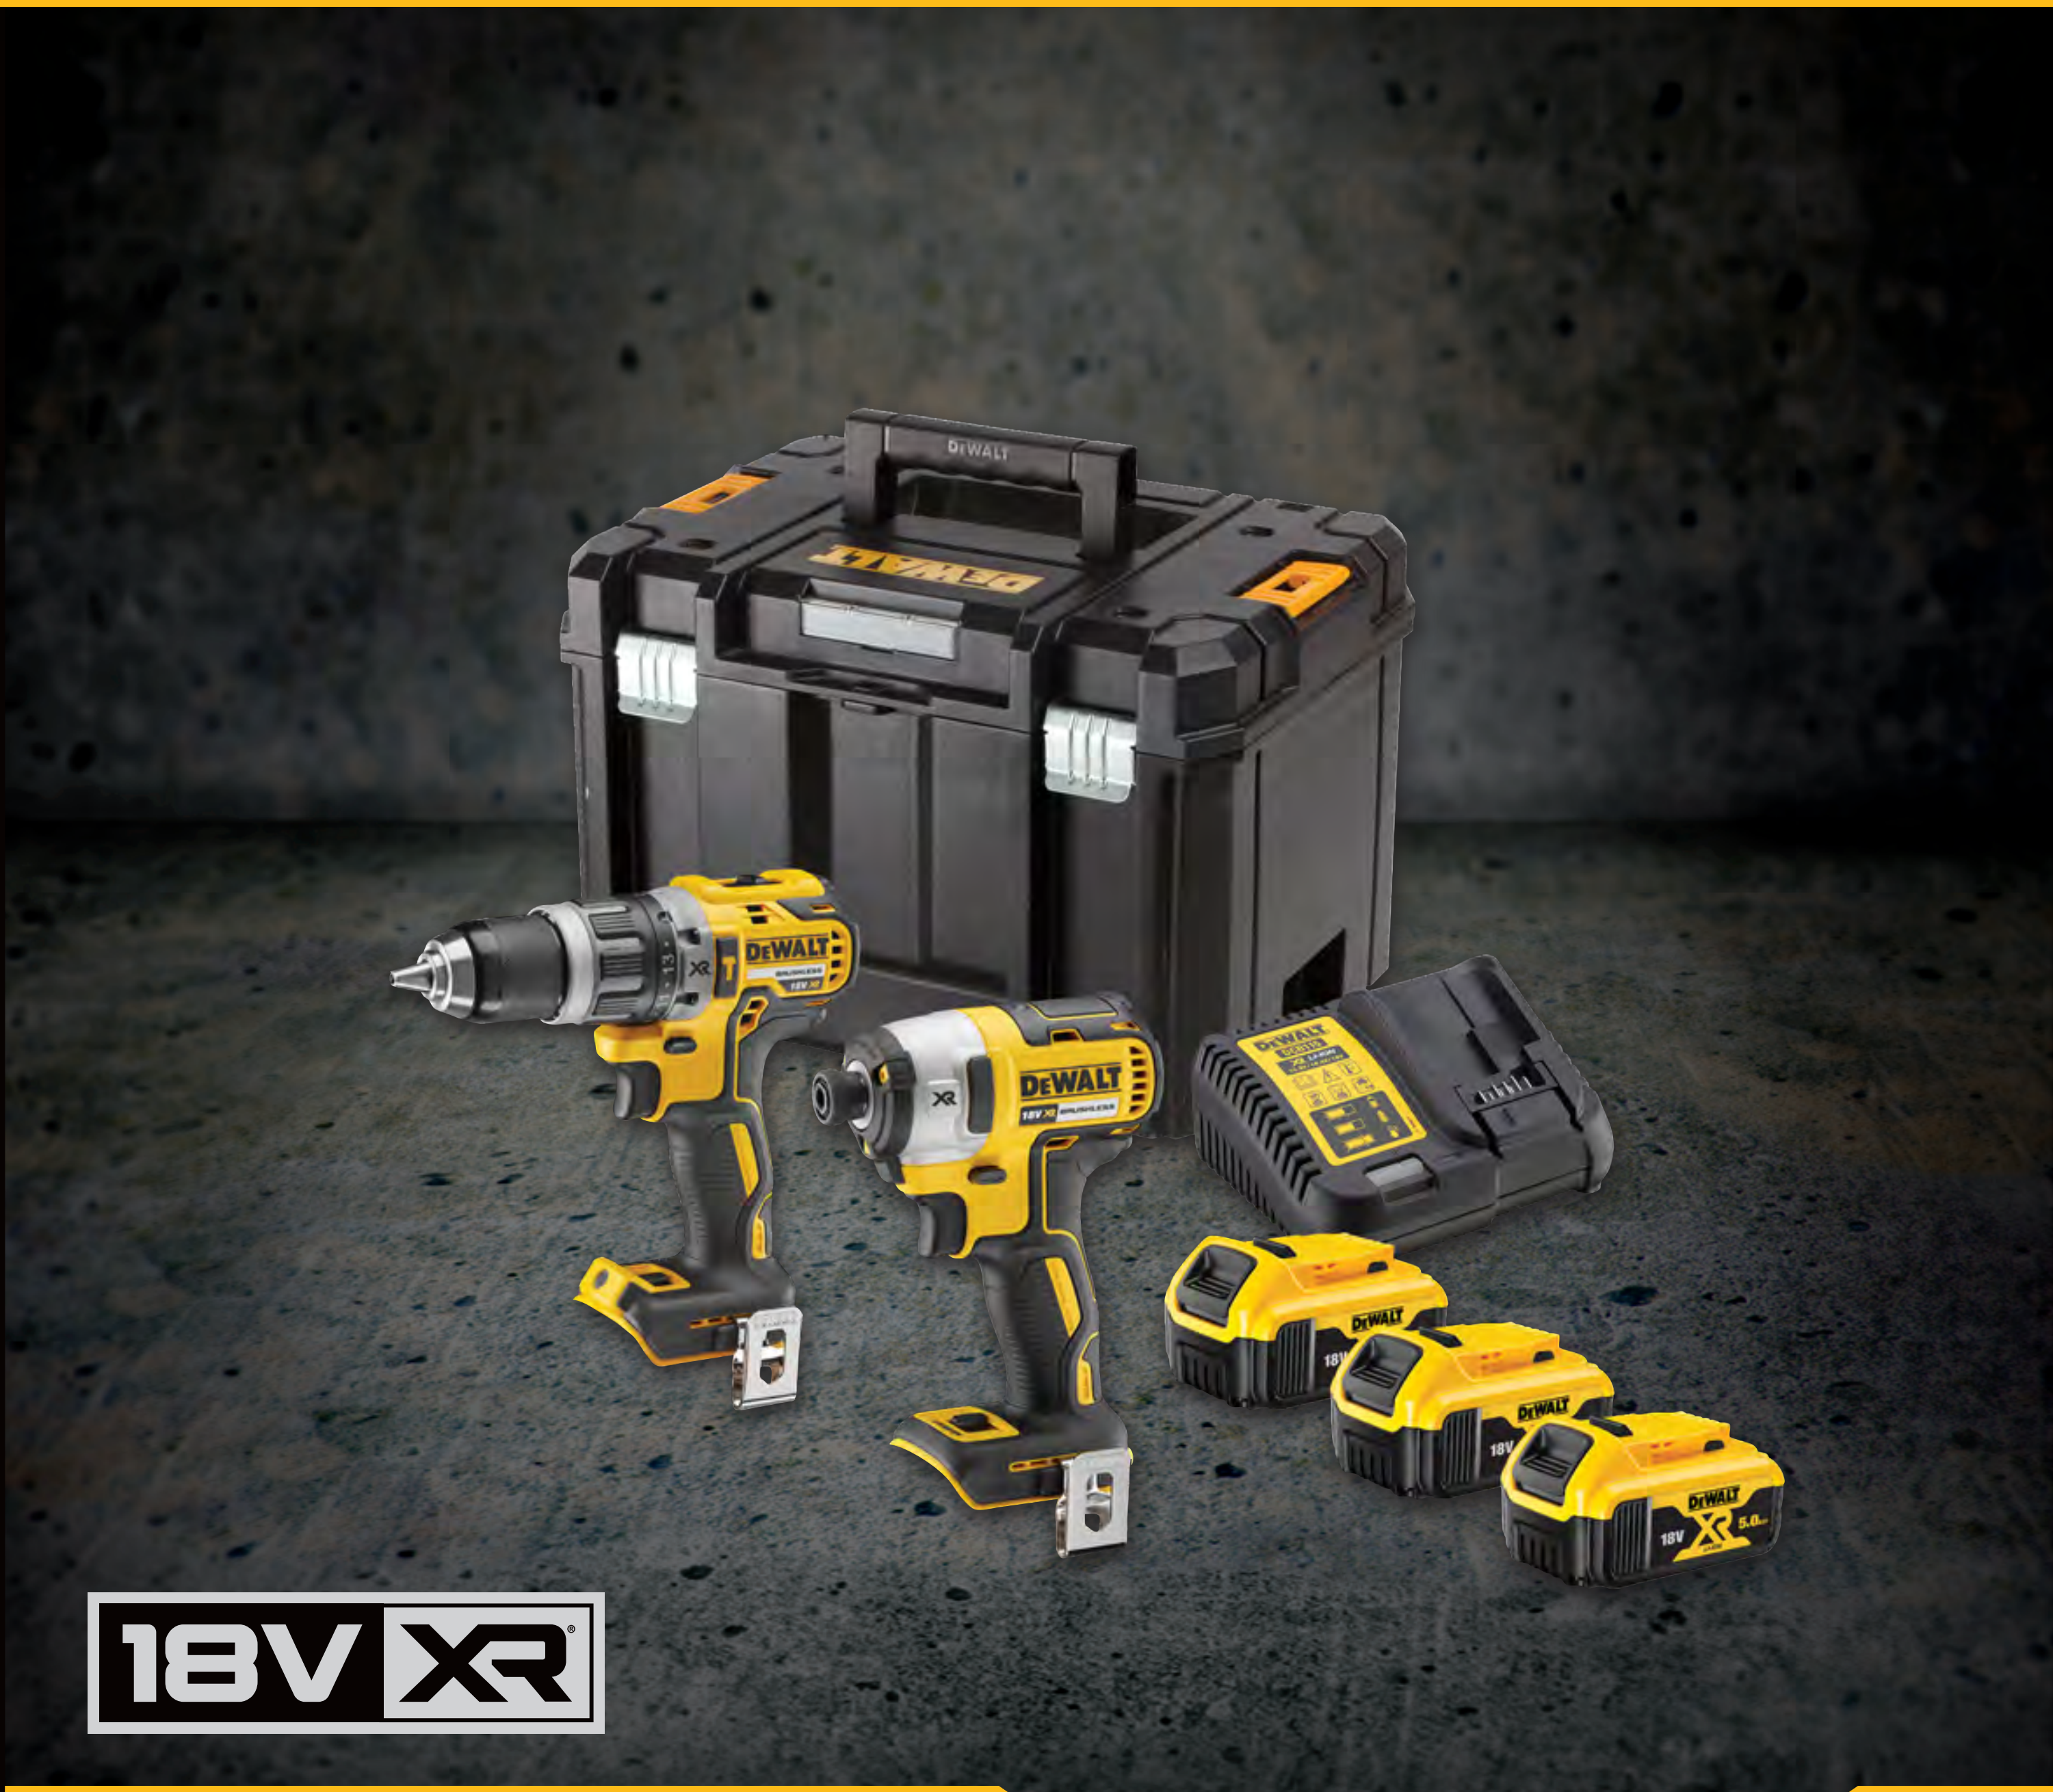

NEW

18V XR 2 PACK COMBO KIT, DCK266P3T

Ideal combo kit for construction use, delivered in a TSTAK case with a hammer drill driver DCD796, a brushless impact driver DCF887, one 4A charger DCB1104, and three 5.0 Ah batteries DCB184.

SPECIFICATIONS	
DCD796:	
Power	18V
No-load speed (min-1)	0–550/ 0–2000 min-1
Impact rate (min-1)	0–9,350/ 0–34,000 min-1
Max. torque (hard/soft) Nm	70/27 Nm
Weight without akku (kg)	1,2 kg
DCF887:	
Power	18V
No-load speed (min-1)	0-1000/2800/3250 min-1
Impact rate (min-1)	0-3800 min-1
Max Torque (Nm)	205 Nm
Weight without akku (kg)	0,9 kg

ART.NR.	PRODUCT DESCRIPTION
DCK266P3T-QW	18V XR 2 KIT DCF887, DCD796, 3X5,0AH

NEW

18V XR 3 PACK KIT, DCK308DM

Ideal powertool kit for construction and interior work, like drywall construction. The kit is including DCF620N 18V XR Dyrwall Screwdriver, DCH133N 18V XR SDS Plus Hammer Drill, DCG405N 18V XR Angle Grinder, one 18V XR 4.0Ah b attery DCB182, one 18V XR 2.0AH battery DCB183, one 4A charger DCB1102 Charger and storage softbag.

SPECIFICATIONS	
DCF620:	
Power	18V
No-load speed (RPM)	0–4400 rpm
DCH133:	
Power	18V
Single impact energy (J)	2,6 J
Tool holder	SDS PLUS
DCG405:	
Power	18V
Wheel diameter (mm)	125 mm
No-load/rated speed (min-1)	9000 min-1
Spindle diameter	M14

ART.NR.	PRODUCT DESCRIPTION
DCK308DM-QW	18V XR 3 KIT

NEW

18V XR PREMIUM 2 PACK COMBO KIT, DCK2200H2T

Ideal combo kit for construction and industry use. The kit is including, DCD1007 premium hammer drill driver, DCF860 premium impact driver, and two 5.0 Ah Powerstack batteries DCBP518, one 4A charger DCB1104 charger and mid-tstak storage box.

SPECIFICATIONS	
DCD860:	
Power	18V
No load speed (rpm)	0–1800/0–2500 / 0–3800 rpm
Max torque (Nm)	282 Nm
Weight without akku (kg)	1,1 kg

SPECIFICATIONS	
DCD1007:	
Power	18V
Number of speed	3 gears (1-2-3)
No load speed (min-1)	500/1300/2250 min-1
Max. Torque (Nm)	169 Nm
Chuck capacity (mm)	1.5–13 mm
Weight without akku (kg)	1,87 kg
Perform & Protect feature	Anti Rotation
LED Light	3 modes (up to 70 Lumens)

ART.NR.	PRODUCT DESCRIPTION
DCK2200H2T-QW	18V XR 2 KIT DCD1007,DCF860, 2 X POWERSTACK 5,0 AH, TSTAK

18V XR 10 PACK KIT, DCK1012P4T

Monster powertool kit including laser usefull for many construction and industrial applications. This cordless kit is including: DCD796 Brushless Hammer Drill Driver, DCF887 Impact Driver, DCG405 125mm Angle Grinder, DCS565 165mm circular saw, DCS382 Reciprocating Saw, DCH172 SDS Hammer Drill, DCS356 Oscillating Multi-Tool, DCS334 Jigsaw, DCL040 LED Pivot Light, DCE088NG18 Cross Line Green Laser, DCB184 x4 5Ah batteries, DCB132 Dual Port Charger and x3 Tstak VI boxes.

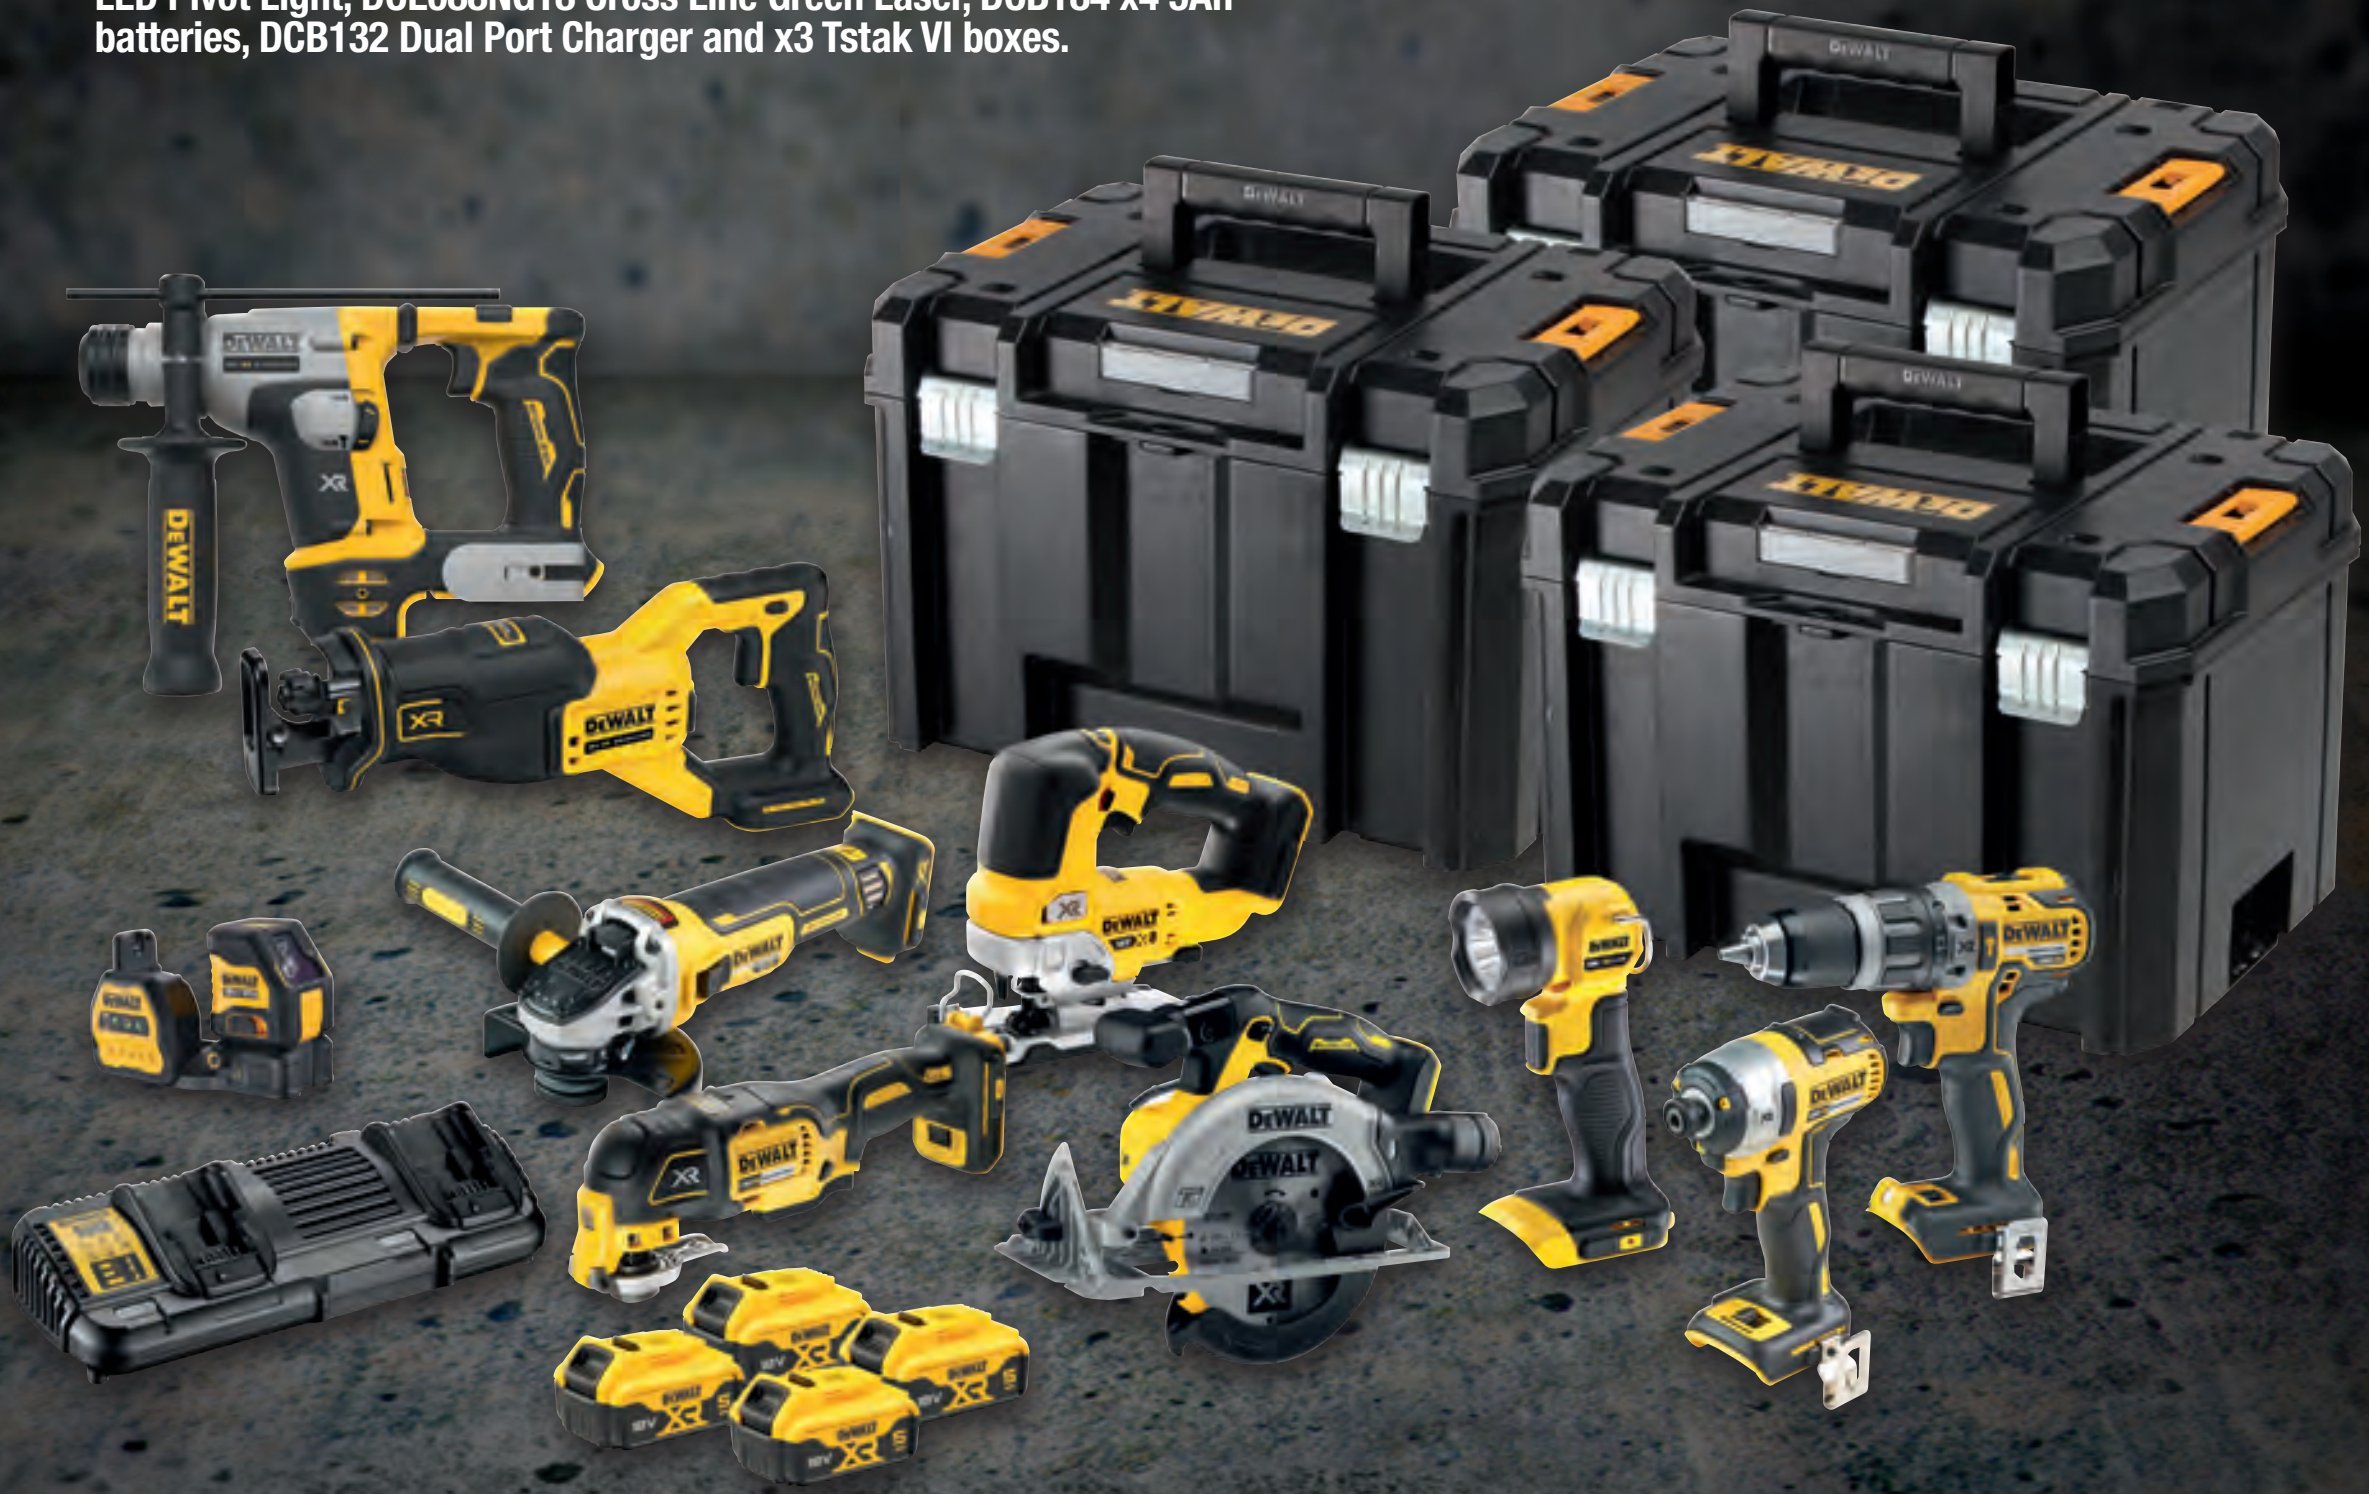

NEW

SPECIFICATIONS	
DCS356:	
Weight without akku (kg)	1.1 kg
DCS334:	
Tool free blade change	Yes
DCL040	
LED Bulb	110 Lumen
DCE088NG18:	
Self-leveling cross laser	Yes (+/-3mm@10m)
Power	18V or 12V
Laser Beam Color	Green (30m (50m with detector)

SPECIFICATIONS	
DCD796:	
Max. torque (hard/soft) (Nm)	70/27 Nm
DCF887:	
Max. Torque (Nm)	205 Nm
DCG405:	
Wheel diameter (mm)	125 mm
DCS565:	
Blade Diameter (mm)	165 mm
DCS382:	
Max. Cutting capacity steel (mm)	160 mm
DCH172 (SDS PLUS):	
Recommended drill diameters (mm)	4-10 mm

ART.NR.	PRODUCT DESCRIPTION
DCK1012P4T-QW	18V XR 10 KIT

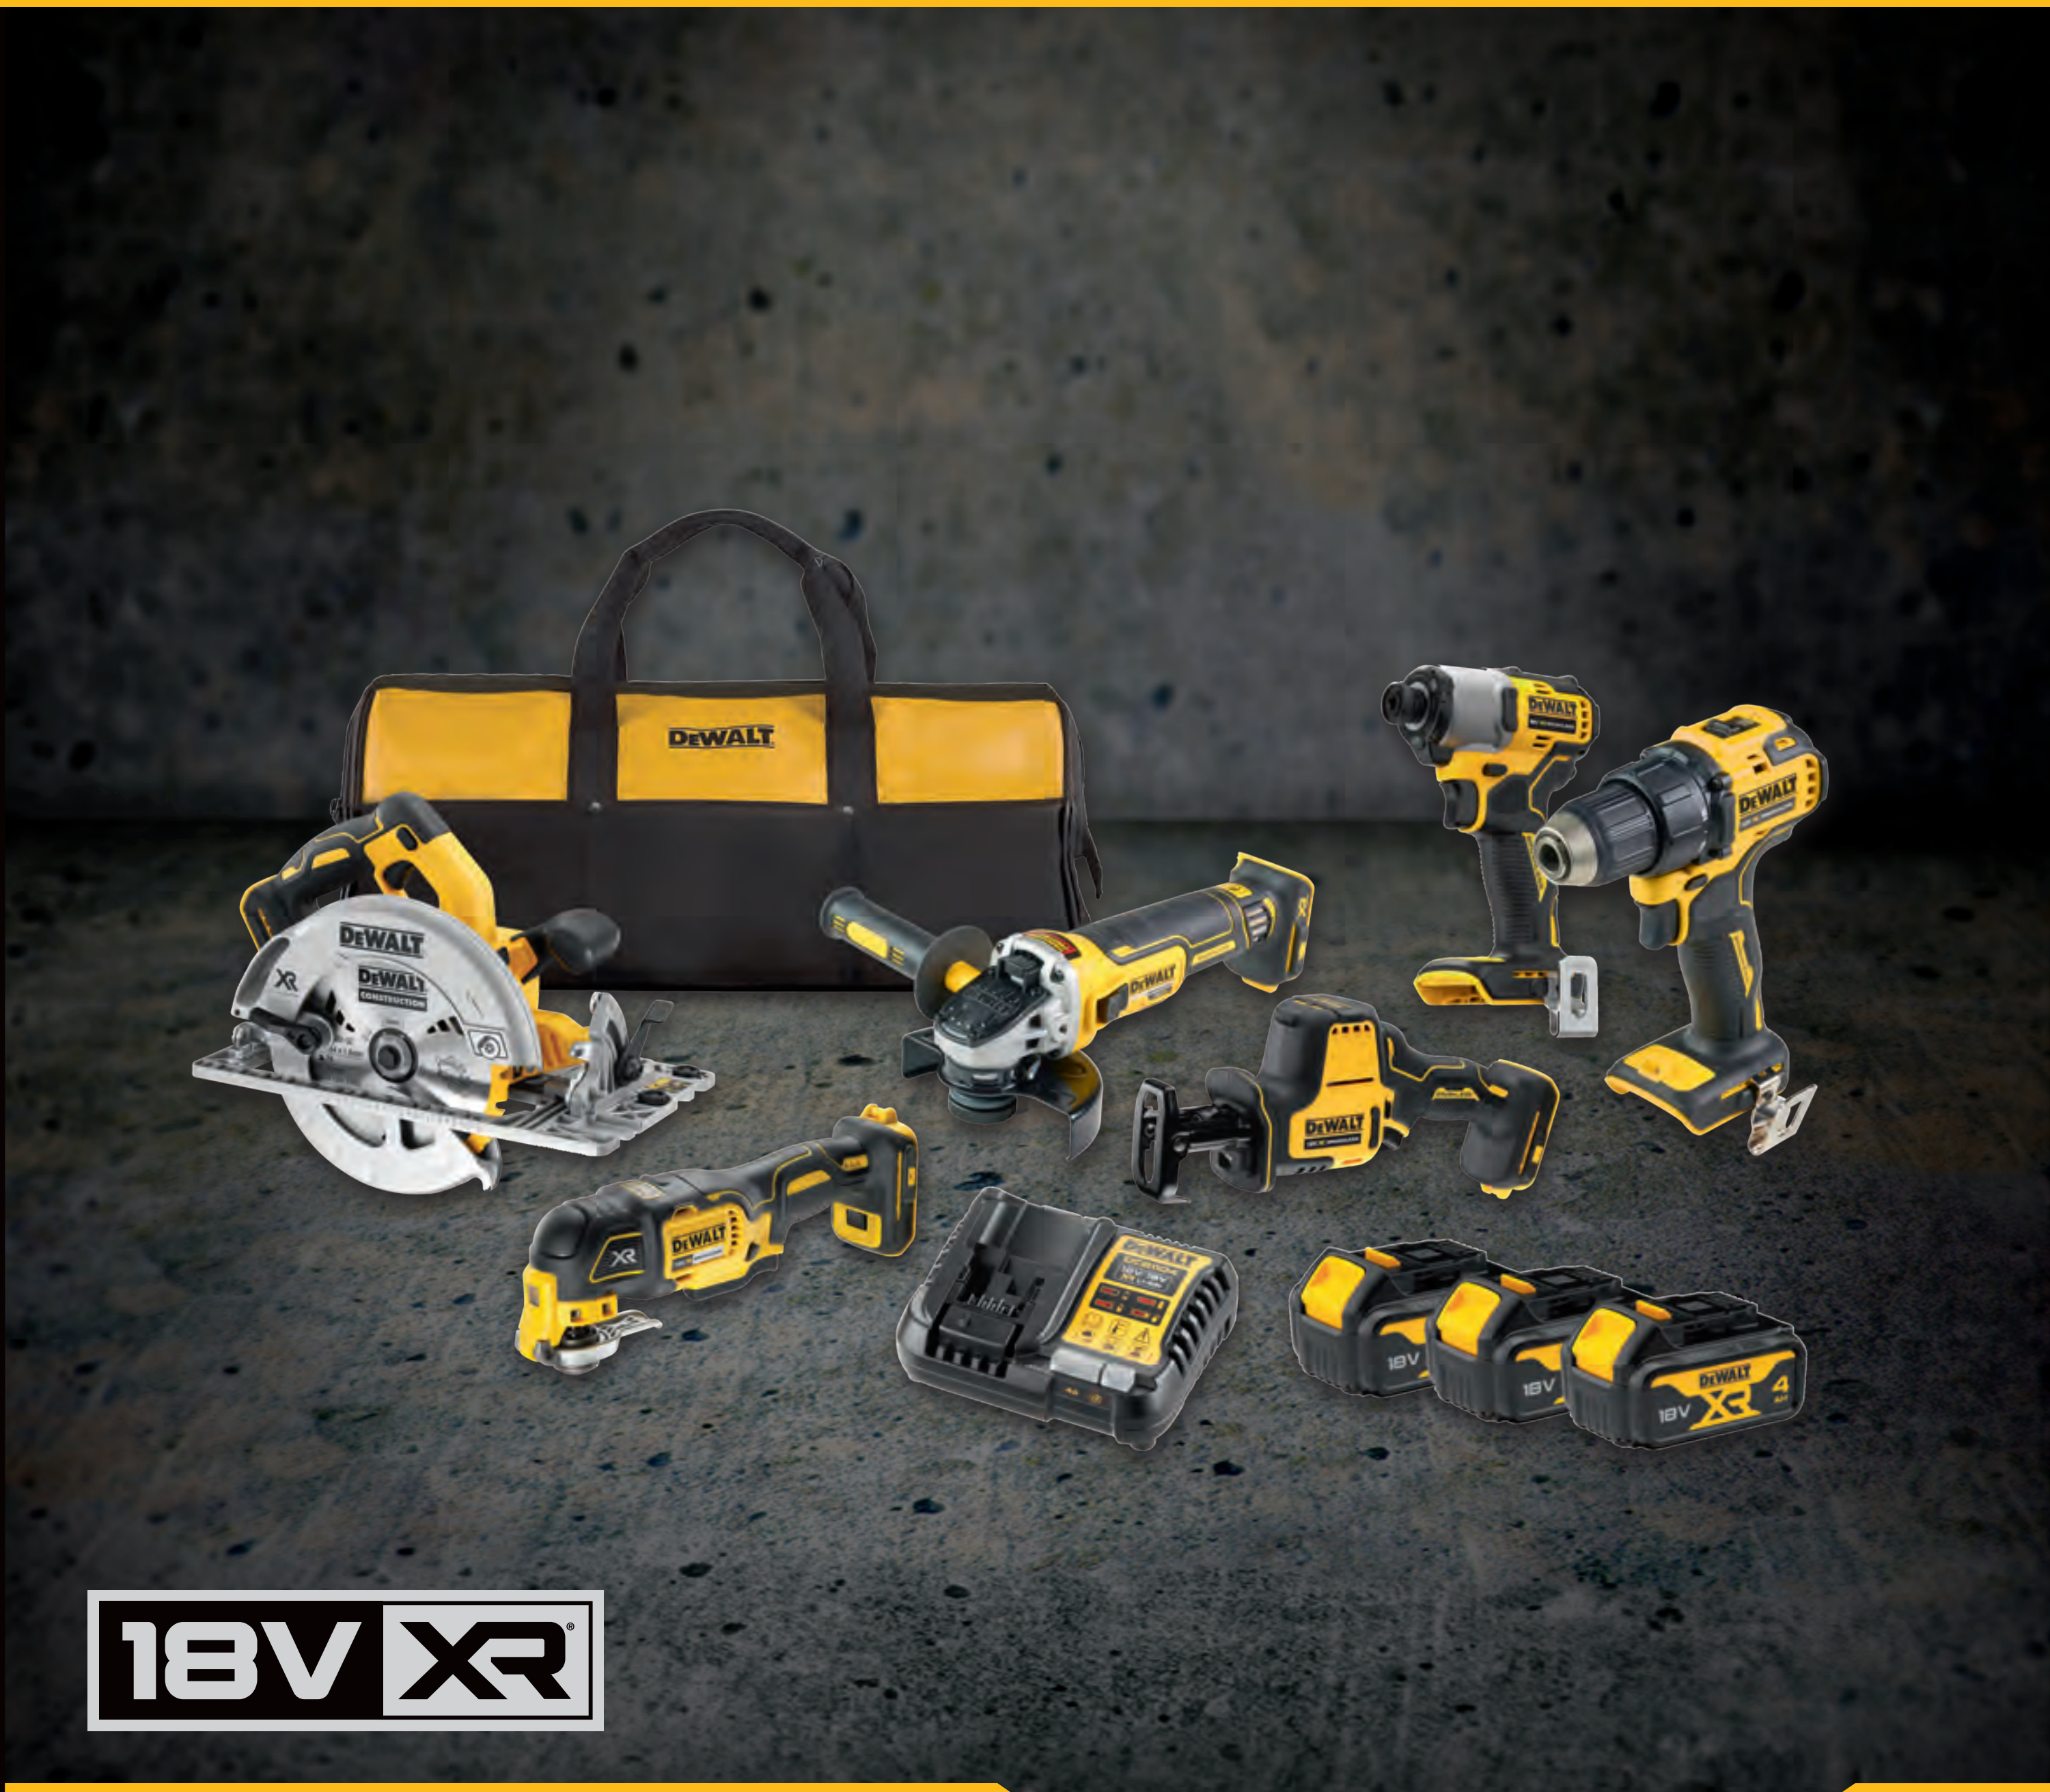

NEW

18V XR 6 PACK KIT, DCK608M3

Ideal powertool kit for carpenters and other construction workers. The kit is included, one DCD708 Compact Drill Driver, one DCF840 Impact Driver, one DCS356 Oscillating Speed Multi-Tool, one DCS572 Circular Saw, one DCS369 Compact Reciprocating Saw, one DCG405 Angle Grinder, three 4Ah batteries DCB182, one DCB1104 4.0A Multi-Voltage Charger and a Soft Bag 659584-00.

SPECIFICATIONS	
DCD708:	
Max torque (Nm)	65 Nm
DCF840:	
Max torque (Nm)	192 Nm
DCS356:	
Weight without akku (kg)	1.1 kg
DCS572:	
Blade diameter (mm)	184 mm
DCS369:	
Weight without akku (kg)	1,43 kg
DCG405:	
Wheel diameter (mm)	125 mm

ART.NR.	PRODUCT DESCRIPTION
DCK608M3-QW	18V XR 6 KIT

DEWALT
100
YEARS
18V
BRUSHLESS
XR

DEWALT
BRUSHLESS
20V
54V XR FLEX VOLT

DCMWP134 PUSH MOWER

"ONE TOUCH STORAGE" / VERTICAL STORAGE

At the touch of one button, fold handles into storage mode.
Takes up 70% less space in vertical storage vs in operation.

INTERACTIVE USER INTERFACE / AUTOSENSING MOTOR

Load meter and user interface allowing real time feedback.
Autosensing motor adjusts speed applicable to load on motor > thicker/longer grass motor speeds up.
This improves performance and runtime.

DUAL BLADE, HIGH EFFICIENCY CORDLESS DECK DESIGN

Decreases grass particle build up and reduced stalls.
More efficient mowing, increased runtime, lower noise.

67L BIG COLLECTION BAG GIVES MORE TIME MOWING.

NEW

2 X 18V MOWER – PUSH, DCMWP134

High-efficiency cutting system with dual blades, designed for extended runtime and cutting performance. 53 cm steel deck mower with autosensing brushless motor, is engineered for cutting performance and durability. 3-in-1 push mower with mulch, bagging and side discharge options for a variety of cutting preferences. Convenient LED dashboard communicates battery state of charge, cutting system difficulty, and blade end of life. One touch handle system quickly telescopes and folds handles for ease of storage. The DEWALT 2x18V Push Lawnmower can complete up to 80 minutes of runtime per charge based on mowing one third of grass height, on height setting 5, using 2 fully charged DEWALT 18V XR DCB188 8,0 Ah batteries. The DCB188 can only be bought as a sparepart.

SPECIFICATIONS	
Power voltage	2 x 18V
Cut width	53 cm
Bag Capacity	67 Ltr.
Weight (without akku)	28 kg
Cutting heights	1= 25 mm / 2= 41 mm 3= 56 mm / 4= 71 mm 5= 86 mm / 6= 102 mm
3 in 1 function	Mulch, Bag, Side discharge
Wheels size	18 cm front / 23 cm back

ART.NR.	PRODUCT DESCRIPTION
DCMWP134N-XJ*	DCMWP134N-XJ*
DCMWP134W2-QW**	2X18V Push mower incl batteries, charger.
DT20902-QZ	Twin cutting blade for DCMWP134

* N version is solo unit with carton with twin blades, excl batteries and charger

**W2 versions are supplied in carton with 2 x DCB188 8 Ah batteries and DCB118 8amp charger and twin blades

18V BRUSHLESS XR

DCMWSP156 REAR WHEEL DRIVE

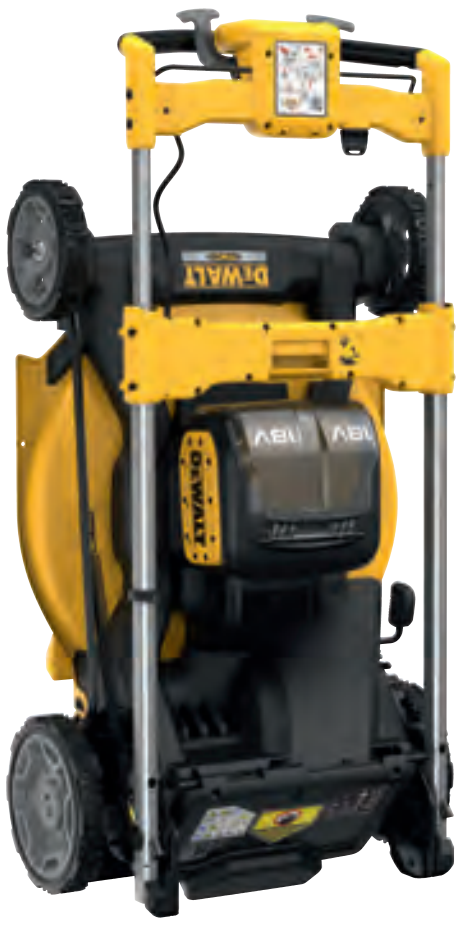

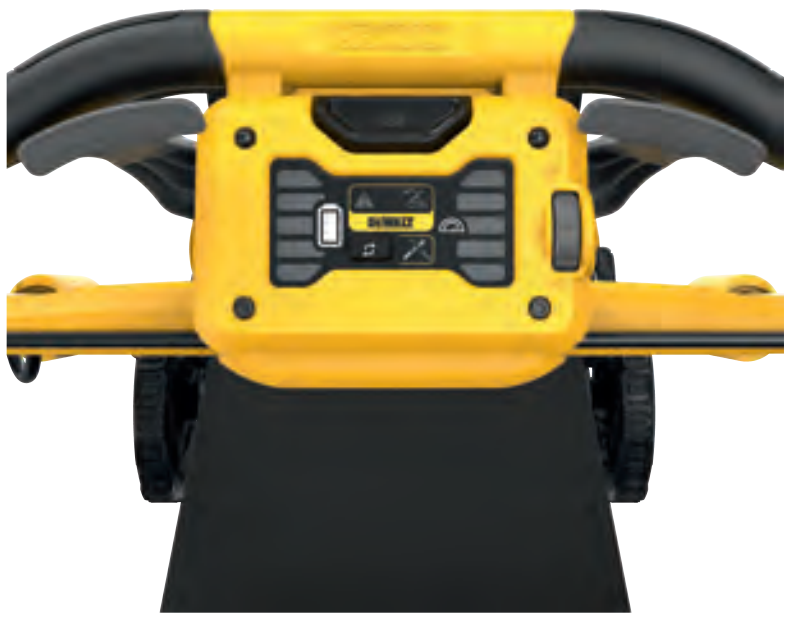

"ONE TOUCH STORAGE" / VERTICAL STORAGE

At the touch of one button, fold handles into storage mode.
Takes up 70% less space in vertical storage vs in operation.

INTERACTIVE USER INTERFACE / AUTOSENSING MOTOR

Load meter and user interface allowing real time feedback.
Autosensing motor adjusts speed applicable to load on motor > thicker/longer grass motor speeds up.
This improves performance and runtime.

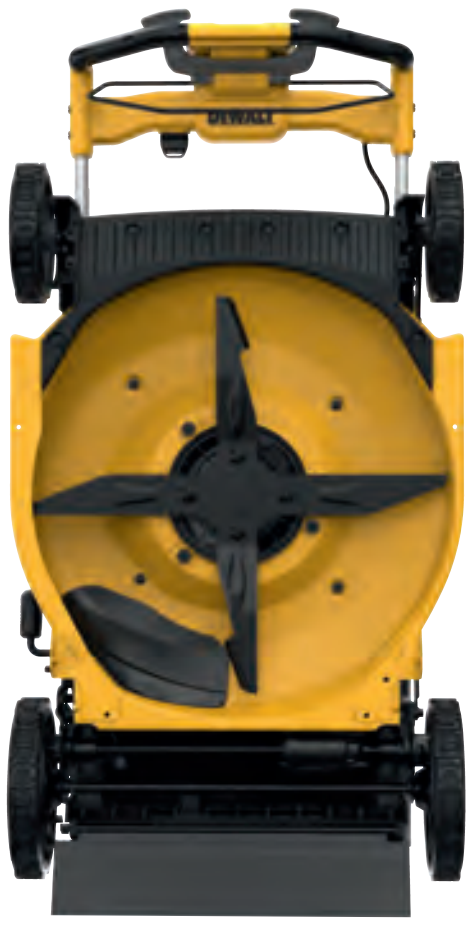

DUAL BLADE, HIGH EFFICIENCY CORDLESS DECK DESIGN

Decreases grass particle build up and reduced stalls.
More efficient mowing, increased runtime, lower noise.

67L BIG COLLECTION BAG GIVES MORE TIME MOWING.

NEW

2 X 18V MOWER – REAR WHEEL DRIVE, DCMWSP156

High-efficiency cutting system with dual blades, designed for extended runtime and cutting performance. 53 cm steel deck mower with autosensing brushless motor, is engineered for cutting performance and durability. 3-in-1 push mower with mulch, bagging and side discharge options for a variety of cutting preferences. Convenient LED Dashboard communicates battery state of charge, cutting system difficulty, and blade end of life. One touch handle system quickly telescopes and folds handles for ease of storage. Select your ideal walking pace with variable speed, rear wheel drive. The DEWALT 2x18V Self-Propelled Lawnmower can complete up to 64 minutes of runtime per charge based on mowing one third of grass height, on height setting 5, using 2 fully charged DEWALT 18V XR DCB188 8,0 Ah batteries The DCB188 can only be bought as a sparepart.

SPECIFICATIONS	
Power voltage	2 x 18V
Cut width	53 cm
Bag Capacity	67 Ltr.
Weight (without akku)	30 kg
Cutting heights	1= 25 mm / 2= 41 mm 3= 56 mm / 4= 71 mm 5= 86 mm / 6= 102 mm
3 in 1 function	Mulch, Bag, Side discharge
Wheels size	18 cm front / 23 cm back

ART.NR.	PRODUCT DESCRIPTION
DCMWSP156N-XJ*	2X18V Self-Propelled mover solo
DCMWSP156W2-QW**	2X18V Self-Propelled mower incl batteries, charger
DT20902-QZ	Twin cutting blade for DCMWSP156

* N version is solo unit with carton with twin blades, excl batteries and charger

**W2 versions are supplied in carton with 2 x DCB188 8 Ah batteries and DCB118 8amp charger and twin blades

18V XR PRUNING SAW

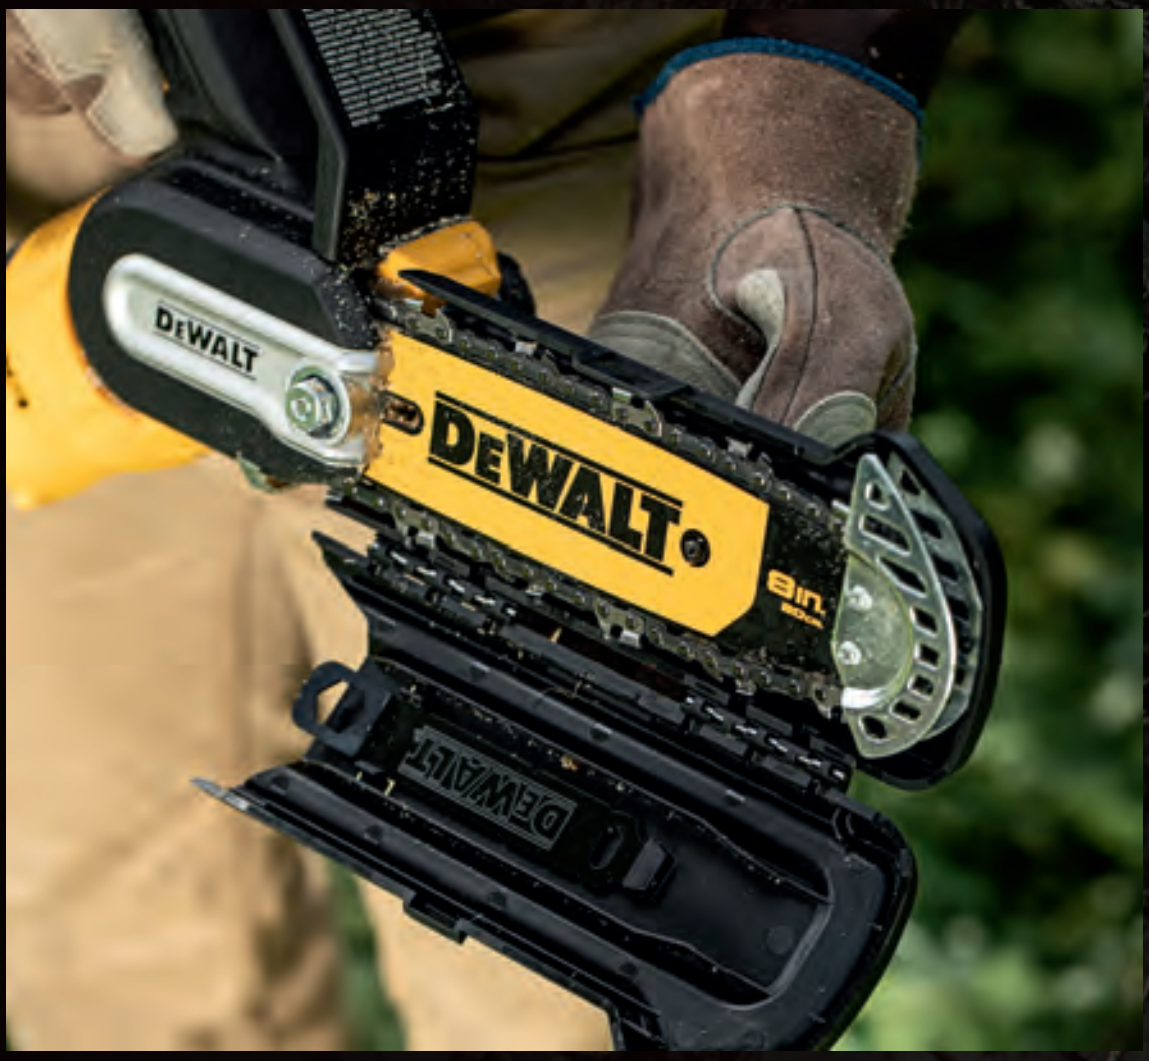

ROBUST PROTECTION COVER TO THE CHAINSAW CHAIN

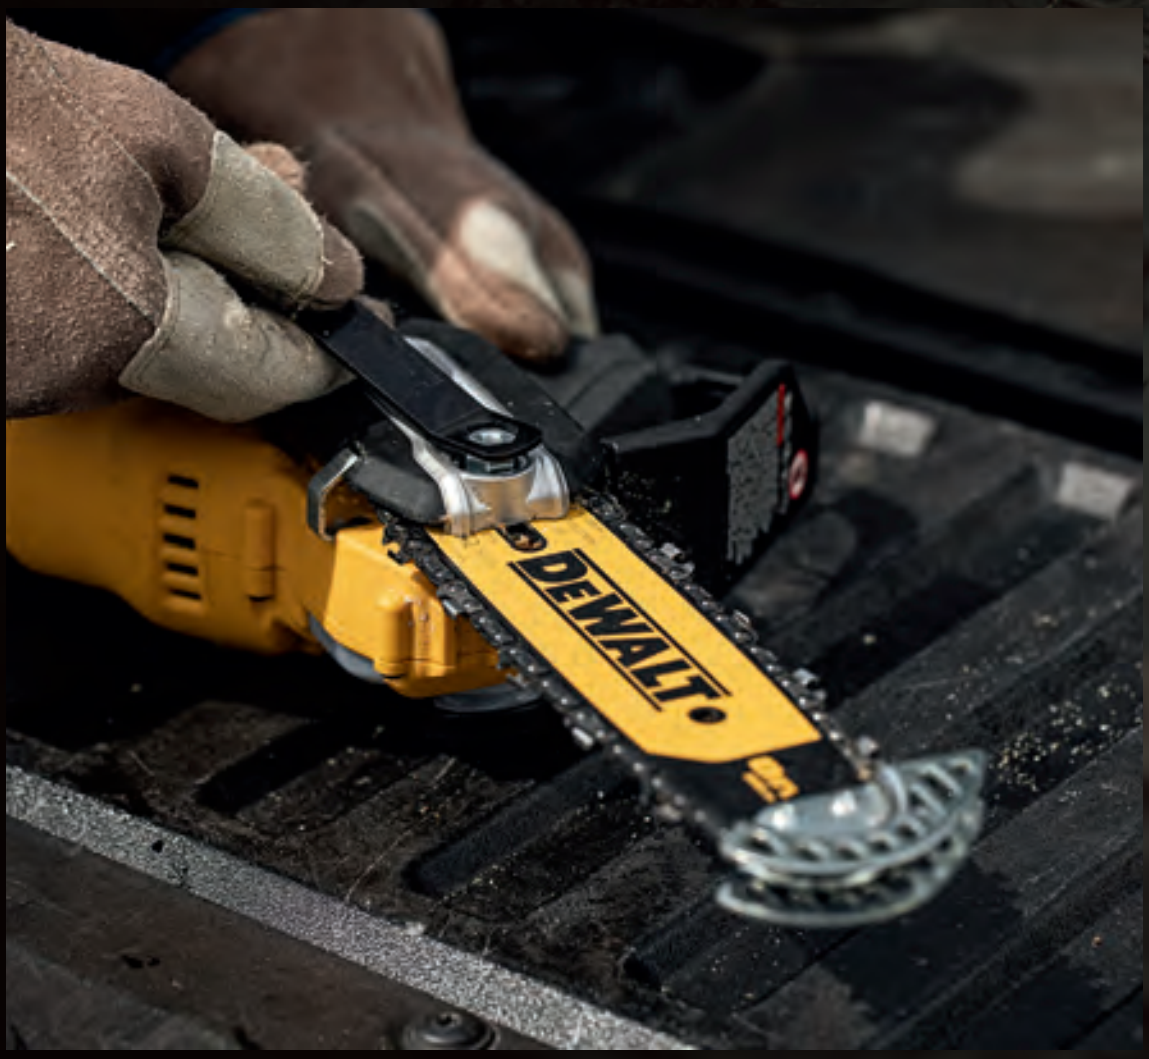

EASY ACCESS FOR TIGHTNING THE CHAIN

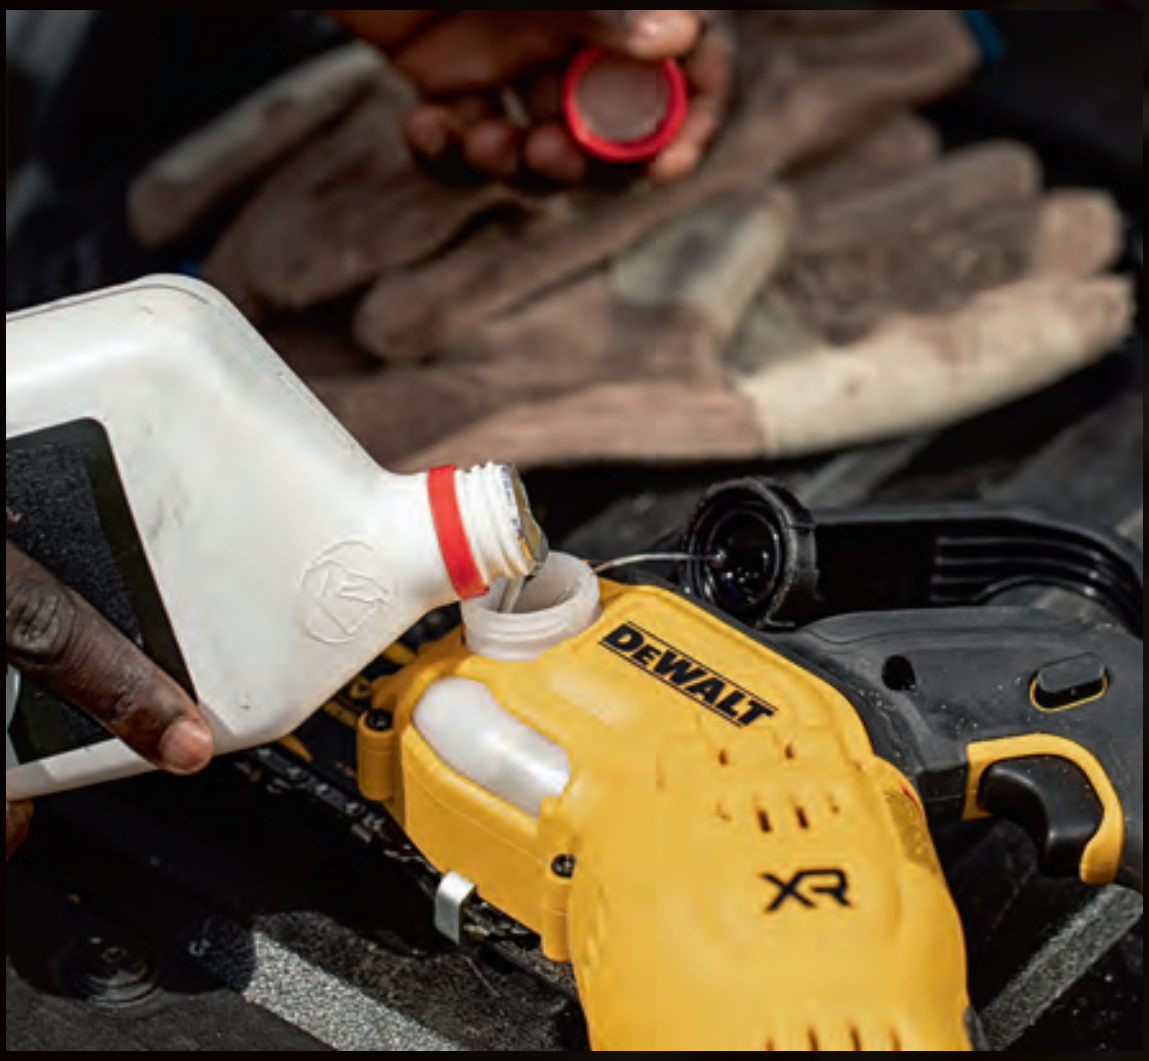

QUICK ACESS TO OILTANK FOR THE CHAINSAW PRUNER

DEWALT
100 YEARS
18V BRUSHLESS XR

NEW

18V XR 20 CM PRUNING SAW, DCMPS520

Be ready for the outdoor season to cut down branches and bushes with the new pruner chainsaw. Maximum cutting capacity up to 15 cm (6”), and with a metal pruning tip – for control and safety during application, mitigates kickback risk as well. Automatic oiler which keeps bar and chain lubricated during use. Brushless motor for high efficiency and long run time. Bolt lock chain tensioning – for reliable bar retention. Body grip design with hand guard – for control and safety during application use.

SPECIFICATIONS	
Power voltage	18V
Bar length	20 cm
Max. chain speed (no-load)	8,6 m/s
Max. cutting Length	15 cm
Oil capacity	55 ml
Weight (without akku)	2,1 kg
Runtime (DCB184/5,0 Ah)	70 cuts in a 4” x 4” beam
Pitch	3/8” LP
Gauge	0.043”, (1.1 mm)
Drive links	34
Agressiveness	Low kickback
Chisel type	Semi chisel
Sequence	Standard
File size	4.0 mm / 5/32”
File angle	30 degree

ART.NR.	PRODUCT DESCRIPTION
DCMPS520N-XJ*	18V XR Pruning saw solo
DCMPS520P1-QW**	18V XR Pruning saw 1 x 5,0 Ah battery, charger
DT20694-QZ	20 cm pruning saw bar
DT20693-QZ	20 cm pruning saw chain

*N version is bare unit in carton, with wrench and scabbard

**X1 version comes in carton with 1 x DCB184 5 Ah battery, DCB1104 4amp charger in a carton with wrench and scabbard

54V XR FLEX VOLT

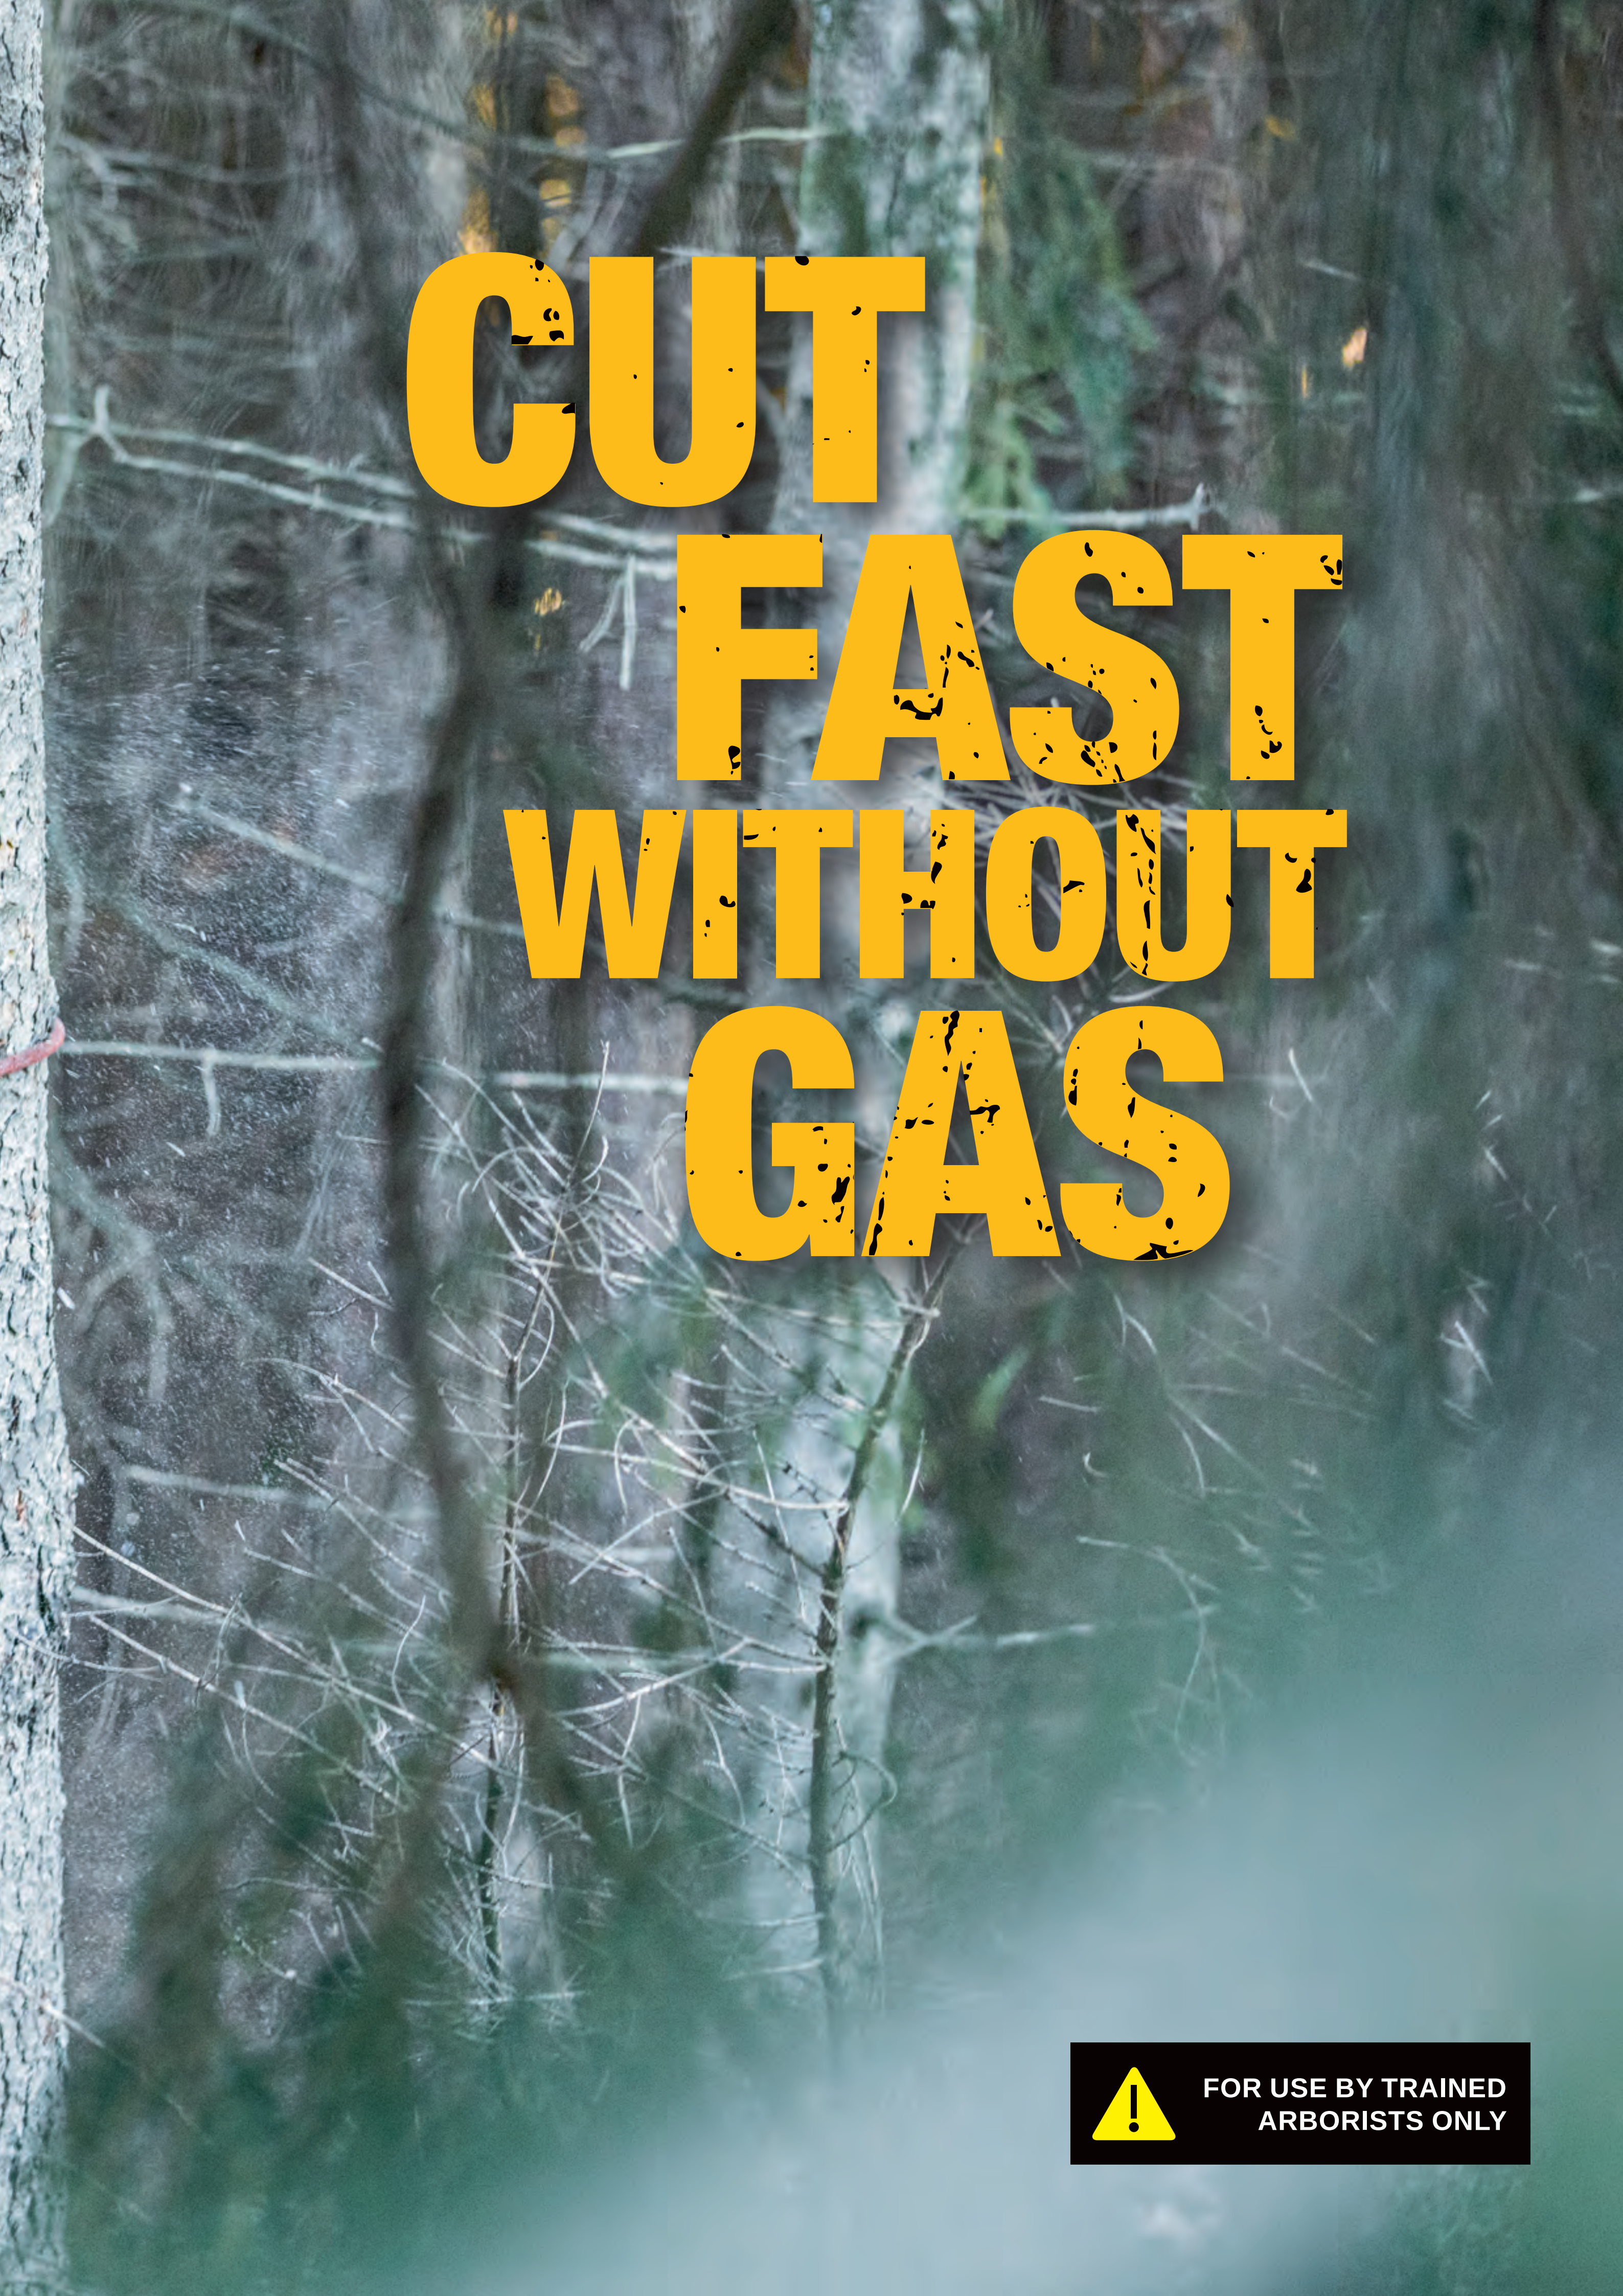
CUT
FAST
WITHOUT
GAS
FOR USE BY TRAINED
ARBORISTS ONLY

54V XR FLEXVOLT

FOR USE BY TRAINED ARBORISTS ONLY

DCMCST635
TOP HANDLE CHAINSAW

Advanced functionality and control: LED dashboard

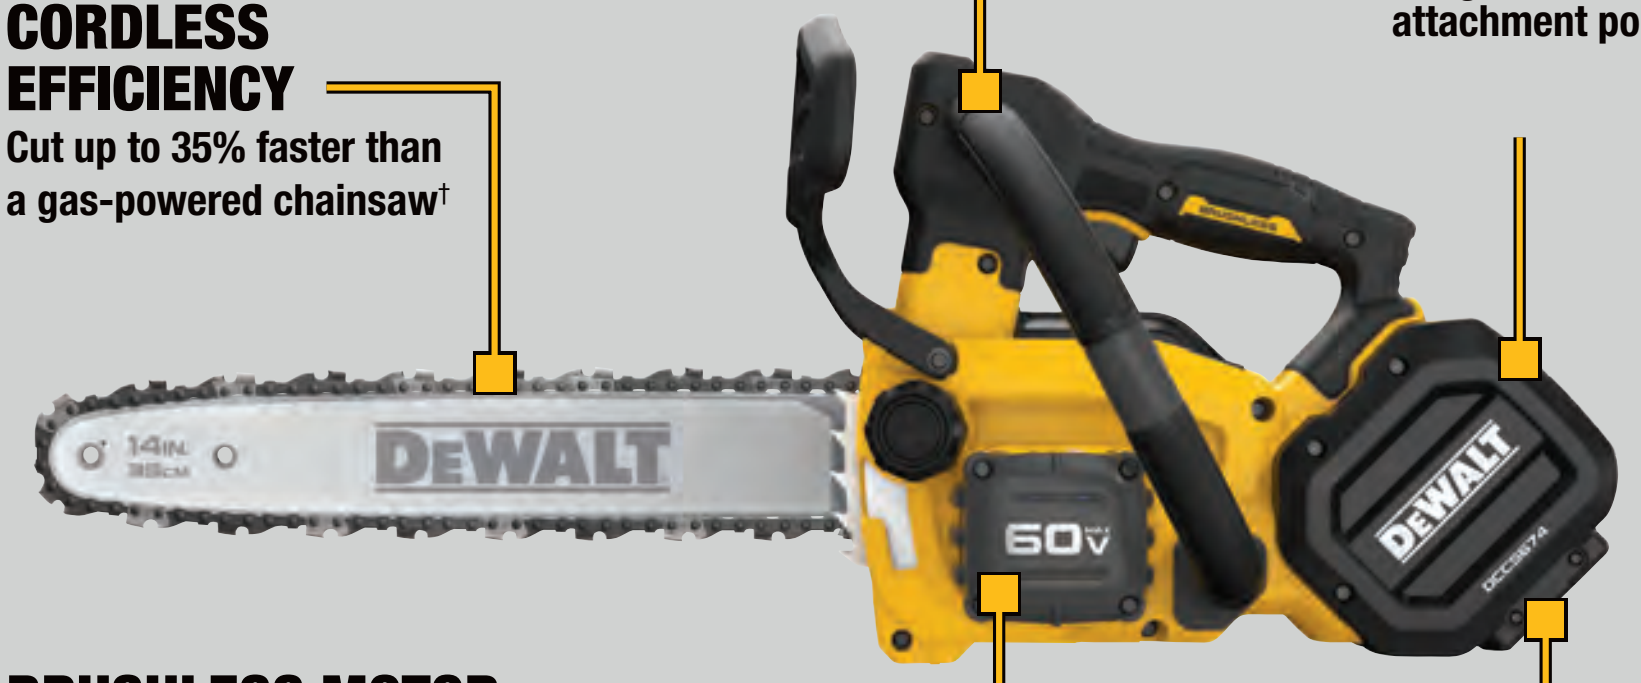

ADVANCED FUNCTIONALITY
LED dashboard for functionality and user control

CORDLESS EFFICIENCY
Cut up to 35% faster than a gas-powered chainsaw†

PRIORITIZE SAFETY
Integrated harness attachment point

BRUSHLESS MOTOR
Designed to maximize run time and motor life

ALL-METAL ADJUSTABLE OILER
for smooth control of oil flow

HARNESS ATTACHMENT POINT
for easy navigation while climbing

UP TO 160 CUTS PER CHARGE** ™

LED DASHBOARD ™

CUTS THROUGH 11" HICKORY LOG IN AS FAST AS 11 SECONDS ™

** Using DCB547 battery, tested on 4”x4” Pressure-Treated Pine.
***Using DCB547 battery.

54V XR FLEXVOLT

FOR USE BY TRAINED ARBORISTS ONLY

NEW

54V XR TOP HANDLE CHAIN SAW, DCMCST635

Engineered for maneuverability, the 54v Top Handle Chainsaw is ideal for tough tree pruning and removal. Powered by FLEXVOLT® batteries, this chainsaw cuts through an 11 in. log up to 35% faster than a 35cc Gas Chainsaw. Cuts through 11" hickory log in as fast as 11 seconds when using DCB547 battery. Built with user safety and control in mind, this product is equipped with an advanced LED dashboard and a harness attachment point. Featuring a chain speed of 23 m/s, A 2.42 HP brushless motor, and adjustable oiling, this chainsaw delivers up to 160 cuts per charge

SPECIFICATIONS	
Power	18 volt
Bar length (cm)	Attached 35 cm (Oregon). Also to be used with 30 – 40 cm bar length.
Max. Chain Speed (no-load)	23 m/s
Chain pitch	0.325"LP*
Drive link thickness	1,1 mm
Weight without akku	3,3 kg
Max. cutting length	30 cm
Oil capacity	140 ml.
LED display	Yes State of charge/Fault warning/ Brake warning
Runtime (with DCB547)	160 cuts (4"x4")
Chain brake	Yes

ART.NR.	PRODUCT DESCRIPTION
DCMCST635N-XJ	54V XR Top handle chain saw, bare version**
DCMCST635X1-QW	54V XR Top handle chain saw, KIT***

** N-Version version is bare unit in carton, with scrench and scabbard

*Pitch: .325" Low Profile, Gauge: .043, Sequence: Standard. File size: 4mm

***X1 version comes in carton with 1 x DCB547 battery, DCB118 8amp charger in a carton with scrench and scabbard

DEWALT PROFFES
CHAIN SA

FOR USE BY TRAINED ARBORISTS ONLY

18V XR

DCM565

30 CM SWORD

7,7 M/S

18V XR

DCMPS520

20 CM SWORD

8,6 M/S

54V XR FLEXVOLT

NEW

DCMCST635

35 CM SWORD

23 M/S

IONAL CORDLESS
W RANGE

PERFORMANCE

54V XR FLEXVOLT

DCMCS574
45 CM SWORD
15 M/S

54V XR FLEXVOLT

DCMCS575
50 CM SWORD
15 M/S

54V XR FLEX VOLT®
BRUSHLESS
DEWALT

FOR USE BY TRAINED ARBORISTS ONLY

TOP HANDLE CHAINSAW, POWERED BY FLEXVOLT® BATTERIES, IT PROVIDES YOU FASTER CUTS THAN A 35CC GAS CHAINSAW AND HELPS MAXIMIZE YOUR PRODUCTIVITY!

54V XR FLEX VOLT
FLEXVOLT
LITHIUM ION
18V
9.0AH
DEWALT

NEW

54V XR VOLT AXIAL BLOWER, DCMBL777

Tackle tough clean-up and clear stubborn debris with the 54V Brushless Low-Noise Blower. Featuring a compact design and foam for quiet operation, this cordless blower operates at 96 dBA guaranteed sound power. With optimized fan geometry that delivers up to 760 CFM of air volume at 258 km/h, this compact blower comes equipped with a flat nozzle, a concentrator nozzle, and a shoulder strap for added versatility in a wide range of applications.

SPECIFICATIONS	
Power	54 Volt
Fantype	Axial
Air volume	760 CFM (21.5m^3/min)
Blow speed	258 km/h
The guaranteed sound power LWA	96dB(A)
Weight without akku	3,2 kg

ART.NR.	PRODUCT DESCRIPTION
DCMBL777N-XJ	54V XR AXIAL BLOWER, Bare version*
DCMBL777X1-QW	54V XR AXIAL BLOWER, 1 x 9 Ah, charger and Acc*

* Included in the kits are: 1x Shoulder Strap, 1 x Concentrator nozzle, 1 x sweeping nozzle

DEWALT

54V XR FLEX VOLT

54V BRUSHLESS LOW-NOISE BLOWER

Advanced functionality and control: Bright LED dashboard

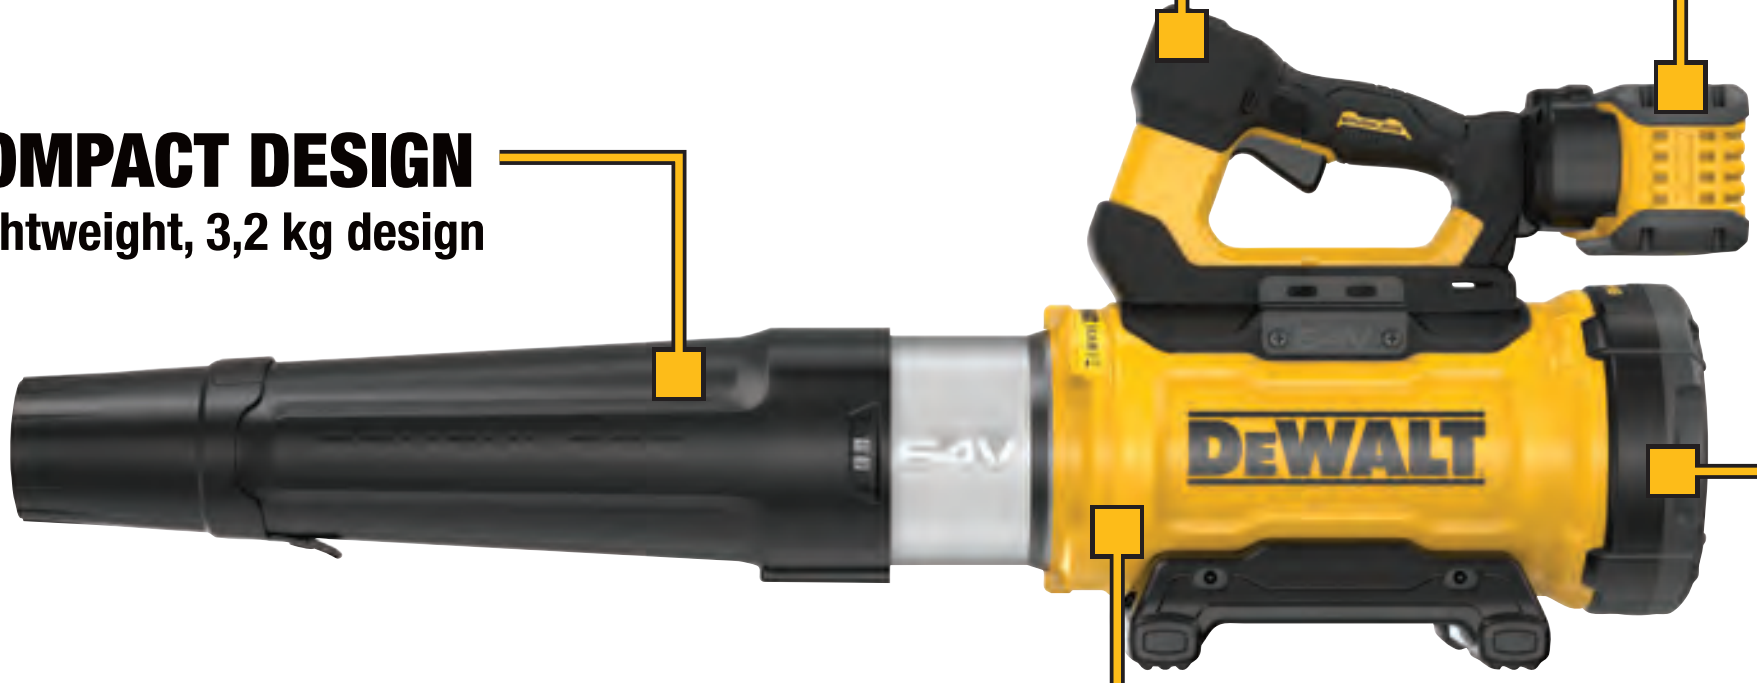

CORDLESS CONVENIENCE
Avoid the hassles of gas with cordless power

ADVANCED FUNCTIONALITY AND CONTROL
Bright LED dashboard

COMPACT DESIGN
Lightweight, 3,2 kg design

OPTIMIZED ENGINEERING
Up to 760 CFM of air volume at 258 km/h

QUIET OPERATION
96 dBA guaranteed
sound power

ACCESORIES INCL:

96 dBA
GUARANTEED
SOUND POWER

LED DASHBOARD™

DEWALT
54V
BRUSHLESS
54V XR FLEXVOLT

54V XR FLEX VOLT

DCMHT573
HEDGE TRIMMER

AUX HANDLE
Wrap around handle
for ease of us

DUAL SHEAR BLADES
For faster cutting

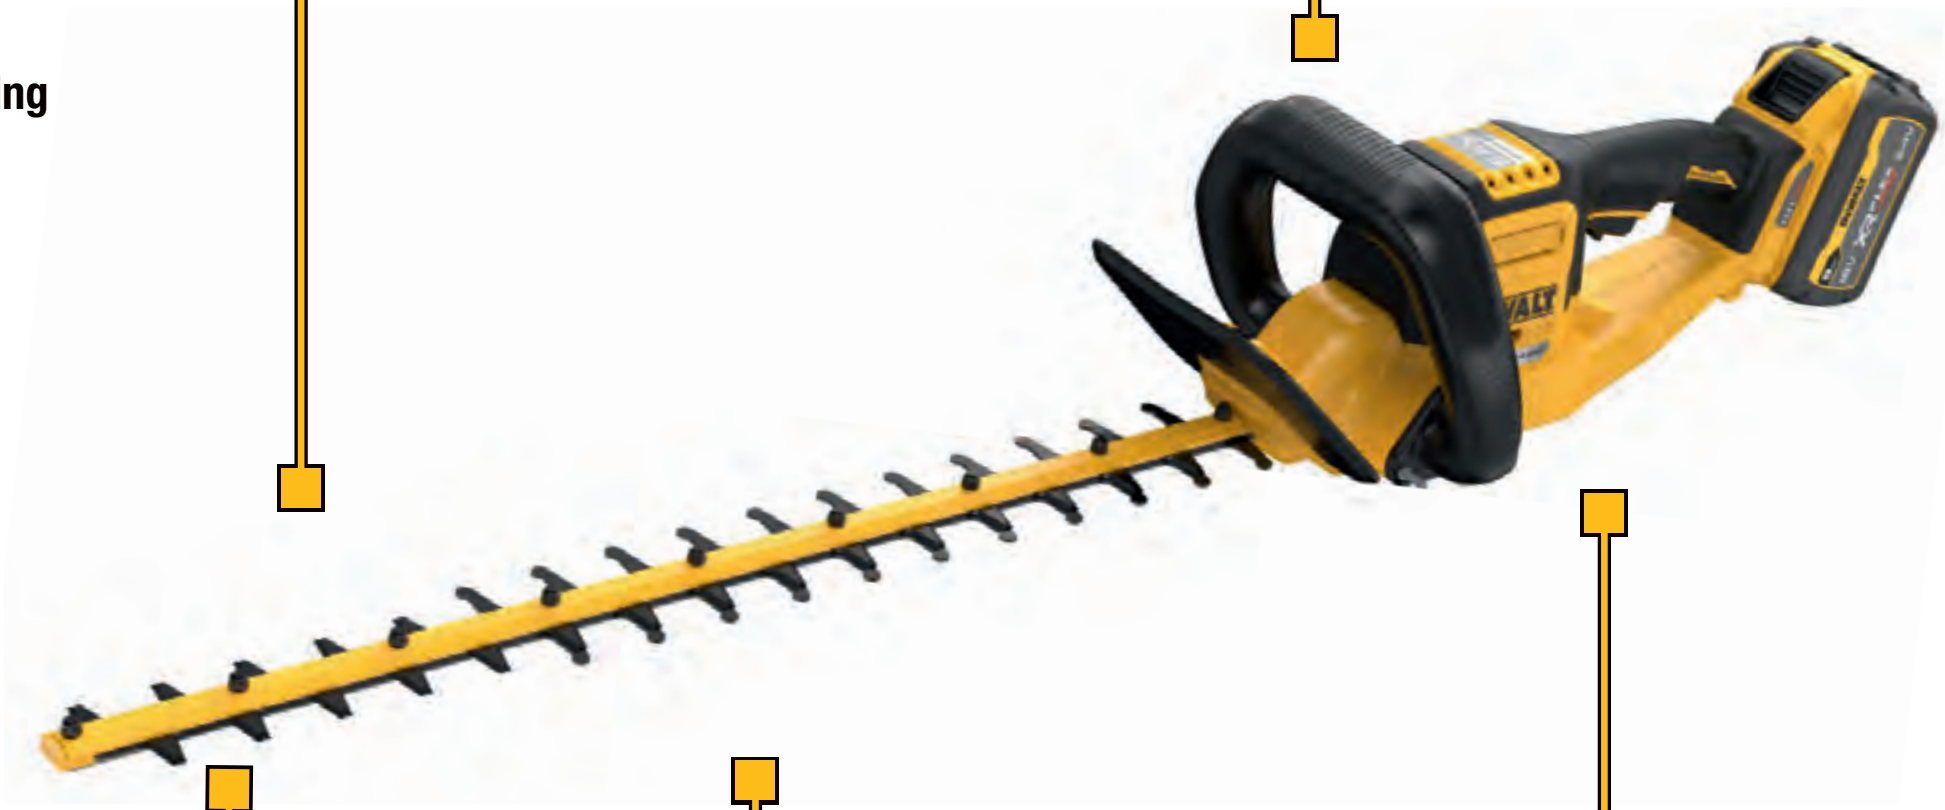

BLADE GAP
31 mm Blade Gap

SUPERIOR REACH
65 cm for easier reaching

BRUSHLESS
High Efficiency Brushless Motor for increased motor life

DEWALT PROFFESIONAL CORDLESS HEDGE TRIMMER RANGE

18V XR

DCM563
19 MM BLADE GAP

18V XR

DCMHT563
25 MM BLADE GAP

54V XR FLEX VOLT

DCMHT573
31 MM BLADE GAP

PERFORMANCE

54V XR FLEXVOLT
NEW

54V XR FLEXVOLT 65 CM HEDGE TRIMMER, DCMHT573

Powerful PRO cordless hedgetrimmer with 31 mm blade gap. The hedgetrimmer has a brushless motor and premium ergonomics. Soft Trigger installed for better handling.

Cut through bigger branches and smoother cut even on thicker branches. Large build in protection guard prevents injuries and protects hands from hedge and blade. Laser cut blades makes cutting teeth's sharper and long lasting.

SPECIFICATIONS	
Power	54 volt
Blade length	65 cm
Blade gap	31 mm
Blade strokes	1400 min
Runtime (DCB547 battery)	Up to 67 min
Weight without akku	4,1 kg

ART.NR.	PRODUCT DESCRIPTION
DCMHT573N-XJ	54V XR FLEXVOLT 65 CM hedge trimmer, bare
DCMHT573X1-QW	54V XR FLEXVOLT 65 CM hedge trimmer, 1 x 9.0 Ah, charger

54V XR FLEXVOLT

DCMWP500 PUSH MOWER

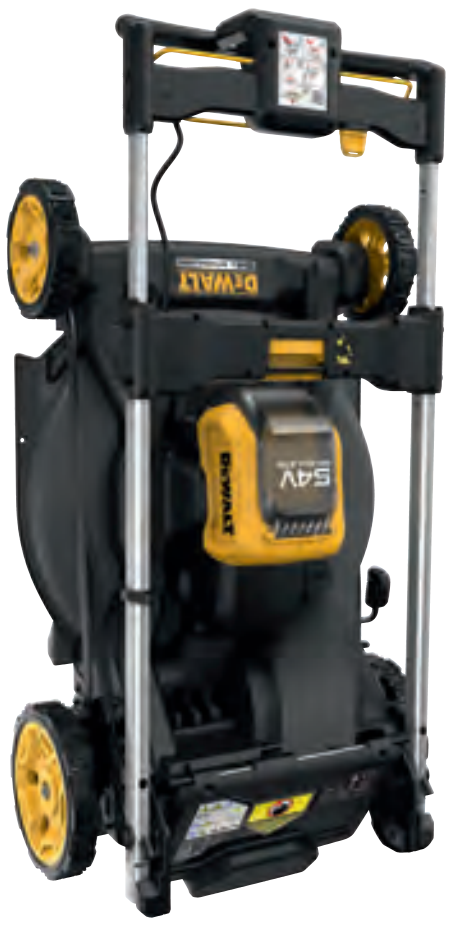

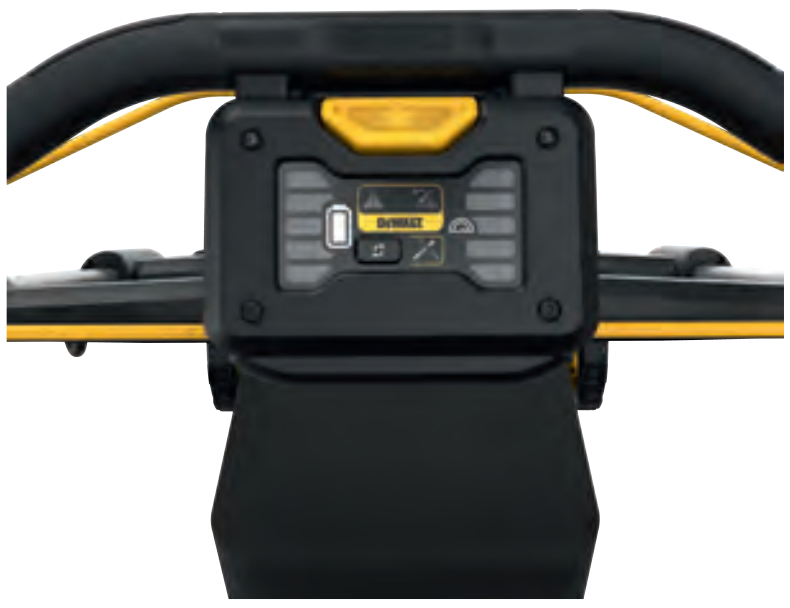

"ONE TOUCH STORAGE" / VERTICAL STORAGE

At the touch of one button, fold handles into storage mode.
Takes up 70% less space in vertical storage vs in operation.

INTERACTIVE USER INTERFACE / AUTOSENSING MOTOR

Load meter and user interface allowing real time feedback.
Autosensing motor adjusts speed applicable to load on motor > thicker/longer grass motor speeds up.
This improves performance and runtime.

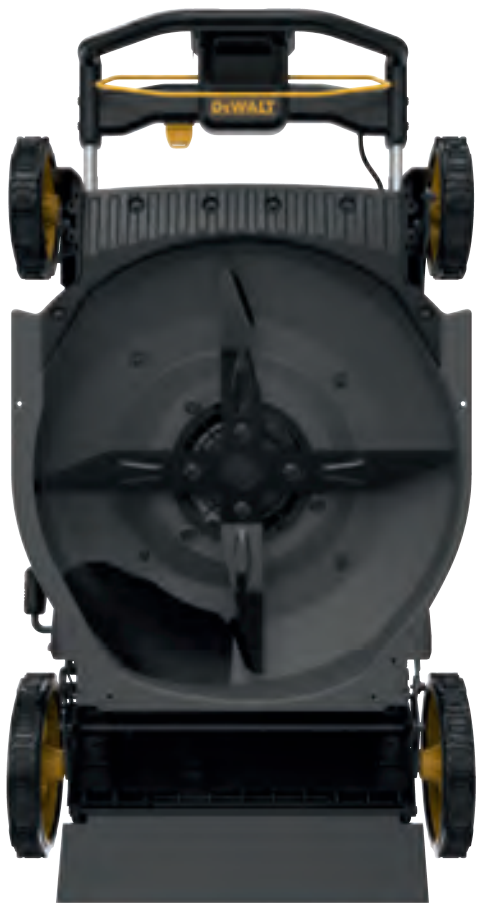

DUAL BLADE, HIGH EFFICIENCY CORDLESS DECK DESIGN

Decreases grass particle build up and reduced stalls.
More efficient mowing, increased runtime, lower noise.

67L BIG COLLECTION BAG GIVES MORE TIME MOWING.

DEWALT
100 YEARS
54V XR FLEX VOLT

NEW

54V XR FLEXVOLT MOWER – PUSH, DCMWP500

High-efficiency cutting system with dual blades, designed for extended runtime and cutting performance. 53 cm steel deck mower with autosensing brushless motor, is engineered for cutting performance and durability. 3-in-1 push mower with mulch, bagging and side discharge options for a variety of cutting preferences. Convenient LED Dashboard communicates battery state of charge, cutting system difficulty, and blade end of life. One touch handle system quickly telescopes and folds handles for ease of storage.

Up to 26 minutes of runtime: Per charge, based on mowing one third of grass height, on height setting 5, using 1 fully charged DEWALT 54V XR FLEXVOLT DCB546 6,0 Ah battery. Battery sold separately.

Up to 66 minutes of runtime: Per charge, based on mowing one third of grass height, on height setting 5, using 1 fully charged DEWALT 54V XR FLEXVOLT DCB549 15,0 Ah battery. Battery sold separately.

SPECIFICATIONS	
Power voltage	54V
Cut width	53 cm
Bag Capacity	67 Ltr.
Weight (without akku)	26 kg
Cutting heights	1= 25 mm / 2= 41 mm 3= 56 mm / 4= 71 mm 5= 86 mm / 6= 102 mm
3 in 1 function	Mulch, Bag, Side discharge
Wheels size	18 cm front / 23 cm back

ART.NR.	PRODUCT DESCRIPTION
DCMWP500N-XJ	54V Push mower solo
DT20902-QZ	Twin cutting blade for DCMWP500

* N version is solo unit with carton with twin blades, excl batteries and charger

**W2 versions are supplied in carton with 2 x DCB188 8 Ah batteries and DCB118 8amp charger and twin blades

54V XR FLEX VOLT

DCMWSP550 REAR WHEEL DRIVE

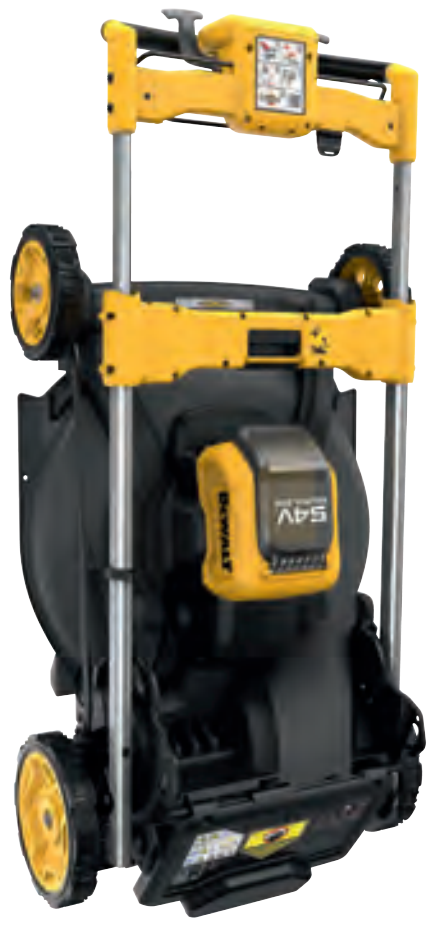

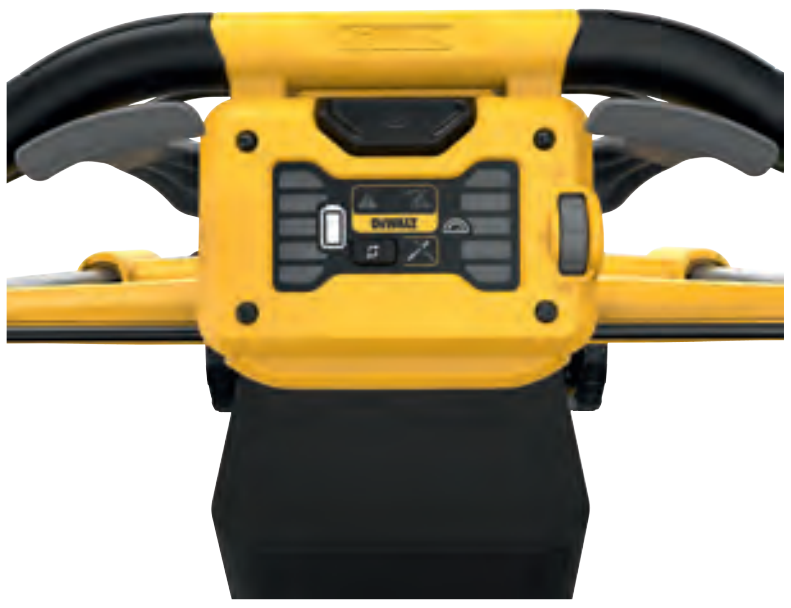

“ONE TOUCH STORAGE” / VERTICAL STORAGE

At the touch of one button, fold handles into storage mode.
Takes up 70% less space in vertical storage vs in operation.

INTERACTIVE USER INTERFACE / AUTOSENSING MOTOR

Load meter and user interface allowing real time feedback.
Autosensing motor adjusts speed applicable to load on motor > thicker/longer grass motor speeds up.
This improves performance and runtime.

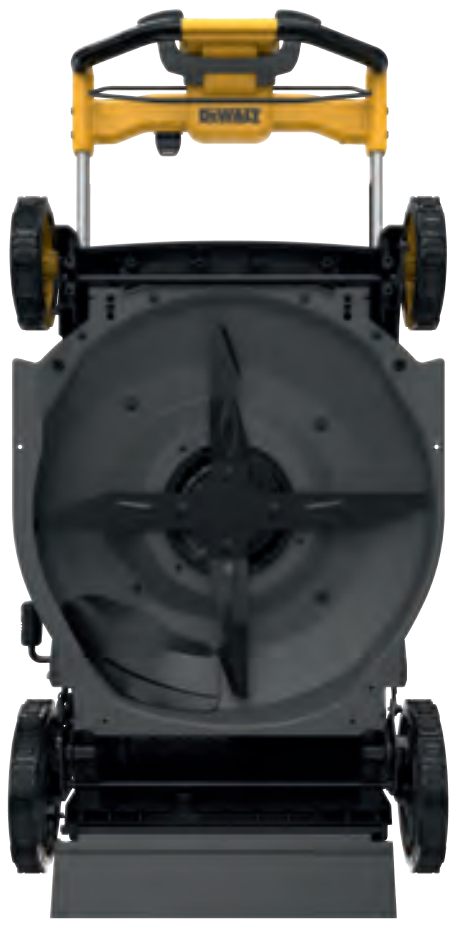

DUAL BLADE, HIGH EFFICIENCY CORDLESS DECK DESIGN

Decreases grass particle build up and reduced stalls.
More efficient mowing, increased runtime, lower noise.

67L BIG COLLECTION BAG GIVES MORE TIME MOWING.

DEWALT
100 YEARS
54V XR FLEX VOLT

NEW

54V **XR** FLEXVOLT MOWER – REAR WHEEL DRIVE, **DCMWSP**550

High-efficiency cutting system with dual blades, designed for extended runtime and cutting performance. 53 cm steel deck mower with autosensing brushless motor, is engineered for cutting performance and durability. 3-in-1 push mower with Mulch, Bagging and Side Discharge options for a variety of cutting preferences. Convenient LED Dashboard communicates battery state of charge, cutting system difficulty, and blade end of life. One touch handle system quickly telescopes and folds handles for ease of storage. Select your ideal walking pace with variable speed, rear wheel drive.

Up to 18 minutes of runtime: Per charge, based on mowing one third of grass height, on height setting 5, using 1 fully charged DEWALT 54V XR FLEXVOLT DCB546 6,0 Ah battery. Battery sold separately.

Up to 46 minutes of runtime: Per charge, based on mowing one third of grass height, on height setting 5, using 1 fully charged DEWALT 54V XR FLEXVOLT DCB549 15,0 Ah battery. Battery sold separately.

SPECIFICATIONS	
Power voltage	54V
Cut width	53 cm
Bag Capacity	67 Ltr.
Weight (without akku)	29 kg
Cutting heights	1= 25 mm / 2= 41 mm 3= 56 mm / 4= 71 mm 5= 86 mm / 6= 102 mm
3 in 1 function	Mulch, Bag, Side discharge
Wheels size	18 cm front / 23 cm back

ART.NR.	PRODUCT DESCRIPTION
DCMWSP550N-XJ	54V Self-Propelled mover solo
DT20902-QZ	Twin cutting blade for DCMWP500

* N version is solo unit with carton with twin blades, excl batteries and charger

WORLD'S FIRST
StanleyBlack&Decker

WORLDS FIRST

- Integrated rotational remote control line laser beam directionality
- Remote control vertical lift for line laser alignment at distance.
- Beam brightness control supporting precision needs.
- Manual slope enabling off level/plumb alignment.

DROP ALERT INDICATOR
Activates when freefall from greater than 1m is detected (light flashes)

MAGNETIC BRACKET
Attach to the magnetic ceiling bracket, metal surfaces, walls or a tripod

CONNECTION INDICATOR
Constant light means connected to remote control

BATTERY LEVEL INDICATOR
Quickly see the battery charge status

LASER MOVEMENT/FINE ADJUST CONTROLS
Move the laser left/right/up/down
Short press for 1 step movement
Long press for continuous with speed ramping up every 2 seconds to 3 speeds

18V COMPATIBLE
Recommended batteries to use are DCB182, DCB183, DCB184 and DCBP034

BEAM BRIGHTNESS ADJUSTMENT
Adjust to suit the light levels on the jobsite. 3 levels of brightness
Saves battery life brightness levels

18V XR

IP54
OVERMOLDED HOUSING

NEW

DEWALT 18V XR 3 X 360 REMOTE CONTROL LASER

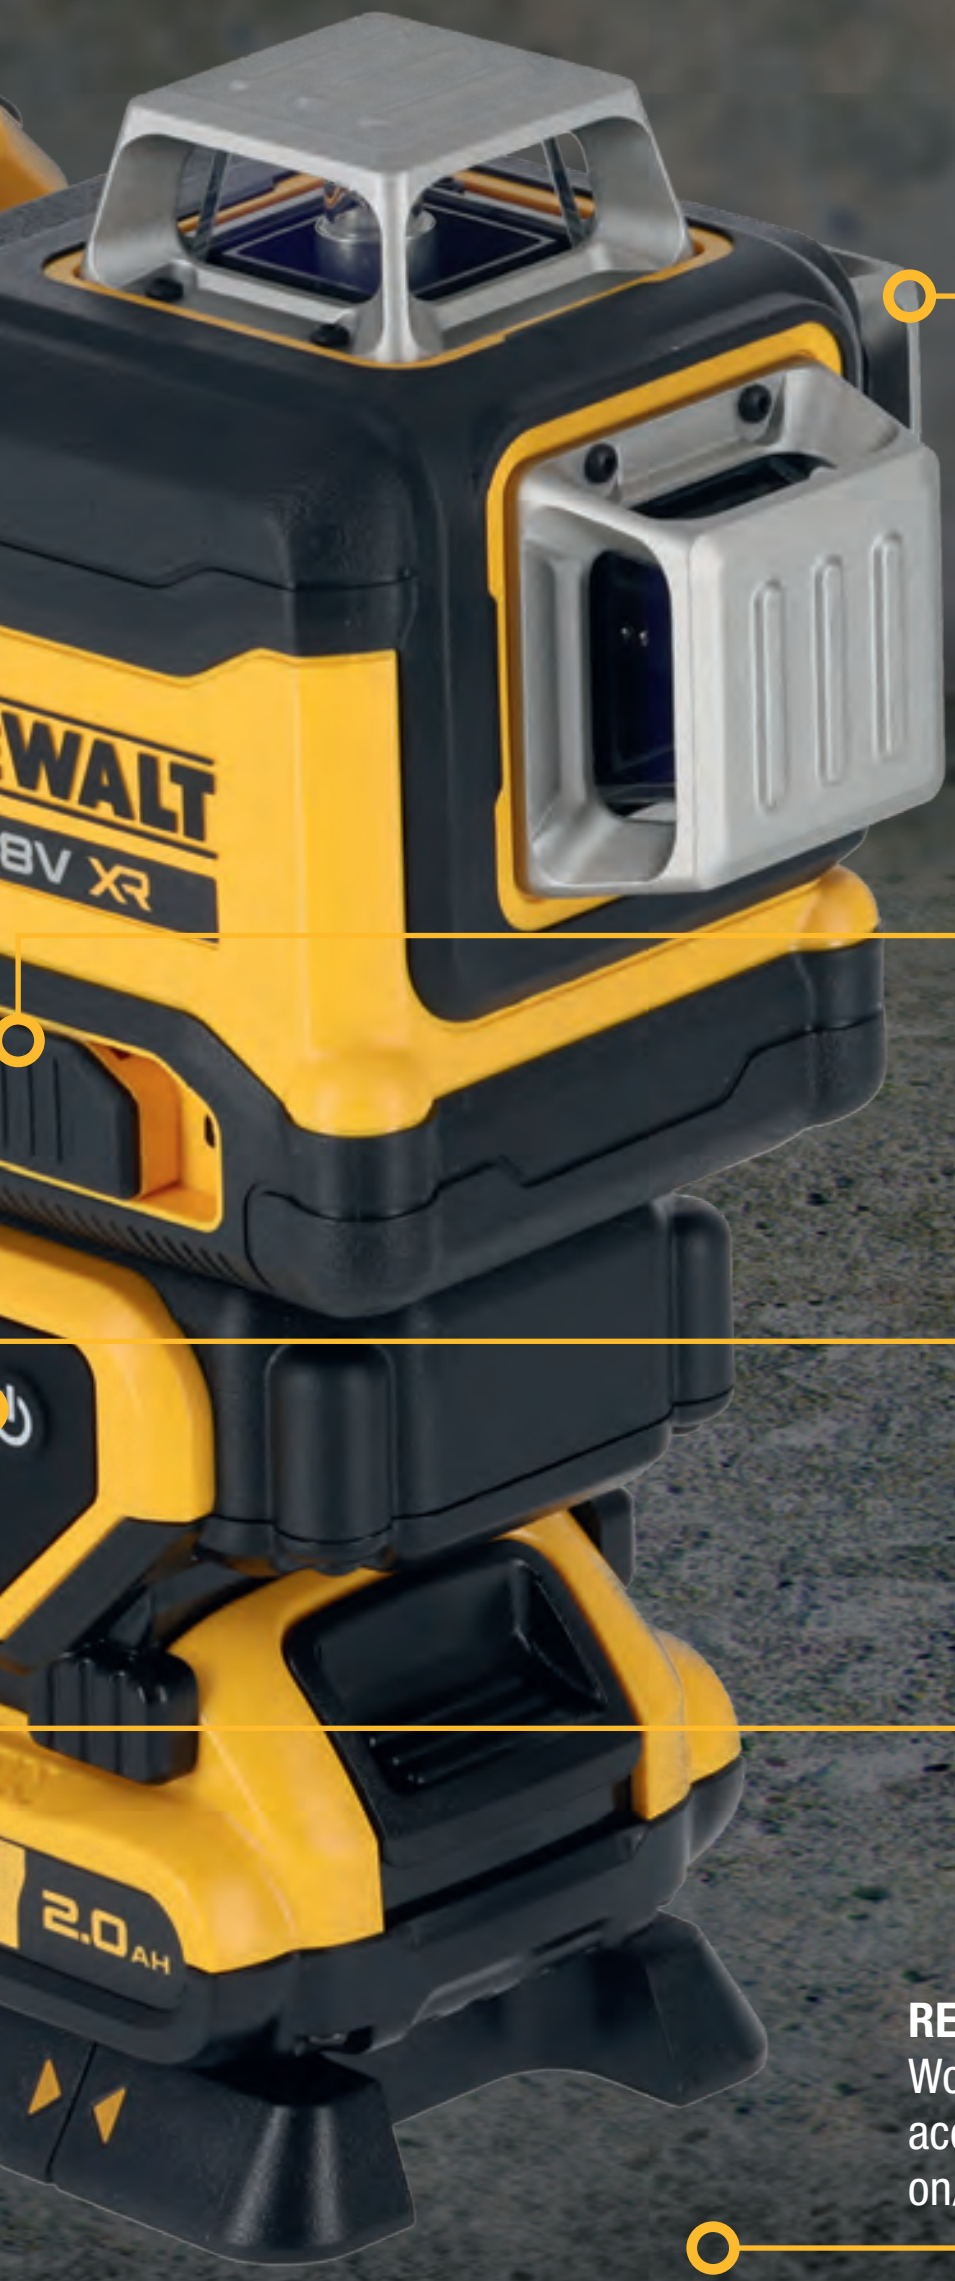

HIGH VISIBILITY 3X360° GREEN BEAM DIODES
Ensures better beam visibility on the jobsite 80 M / 100 M w/detector

POSITION SWITCH
Pendulum Lock/ Manual Slope/ Self Level/

MOTORISED REMOTE CONTROL FINE TUNING ADJUSTMENT
Vertical 90 mm and horizontal 174° degree rotation

LASER DIODE ON/OFF
Control each laser diode

REMOTE CONTROL
Works up to 100 meters away for precise accurate set-up (fine adjust), laser lines on/off and beam brightness

REMOTE-CONTROLLED OPERATION

DEWALT GRE CROSS LINE L

12V XR

DCE089D1G

WORKING RANGE:

30 METER / 50 METER,
WITH DETECTOR

18V XR

DCLE34031D1

WORKING RANGE:

40 METER / 100 METER,
WITH DETECTOR

EEN 3 X 360°
LASER RANGE

12V XR

18V XR

DCE089D1G18

WORKING RANGE:

70 METER / 100 METER,
WITH DETECTOR

18V XR

WORLD'S FIRST

StanleyBlack&Decker

NEW

DCLE34035D1

WORKING RANGE:

80 METER / 100 METER,
WITH DETECTOR

PERFORMANCE

WORLD'S FIRST
StanleyBlack&Decker

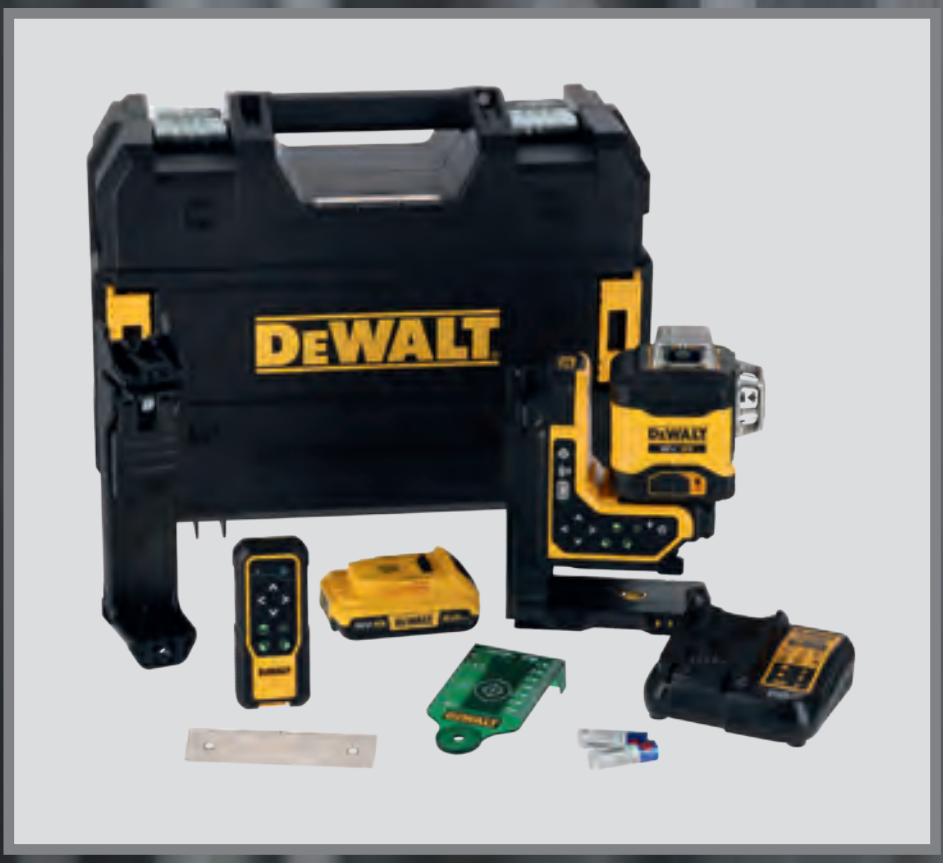

NEW

18V XR 3 X 360 REMOTE CONTROL LASER, DCLE34035

Worlds first - Integrated rotational Remote Control line laser beam directionality.
Worlds first - Remote Control vertical lift for line laser alignment at distance.
DEWALT first - Beam brightness control supporting precision needs.
DEWALT first - Manual slope enabling off level/plumb alignment.
The DCLE34035 3x360 Laser is a Class 2 laser product. It is a self-leveling laser tool that can be used for horizontal (level) and vertical (plumb) alignment projects.
Time saving laser which can help increased productivity having a remote to steer the horizontal (~ 174°) and vertical adjustment (~ 90mm) instead of 2 people or 1 person running back and forth.

SPECIFICATIONS	
Power	18V
Light Source	Green laser diode
Laser Wavelength	510 – 530 nm visible
Range	Up to 100 mtr with remote control range using DE0892G-XJ detector (sold separately). For best range, keep the unit 1.5 m above the ground
Accuracy (Plumb/Level)	±3.0 mm per 10 mtr
Environmental	Water & Dust Resistant to IP54.
These battery packs may be used	DCB182, DCB183, DCB184, DCBP034

ART.NR.	PRODUCT DESCRIPTION
DCLE34035B-XJ	18V XR REMOTE CONTROL 3 X 360 LINE LASER, SOLO*
DCLE34035D1-QW	18V XR REMOTE CONTROL 3 X 360 LINE LASER, 1 X 2.0 AH**

* Laser, TStak case, Remote control, ceiling bracket, target card

** Laser, TStak case, 1 x 2.0 Ah 18V XR battery, charger, remote control, ceiling bracket, target card

FULLY CHARGED - ALL FROM ONE CABLE

USB
DEWALT
DCB094
18V
XR
5.0AH
LI-ION
5A 100W

NEW

NEW USB-C CHARGED PRODUCTS TO THE DEWALT RANGE – CROSS LINE LASERS

DCLE14201GB

DCLE14201RB

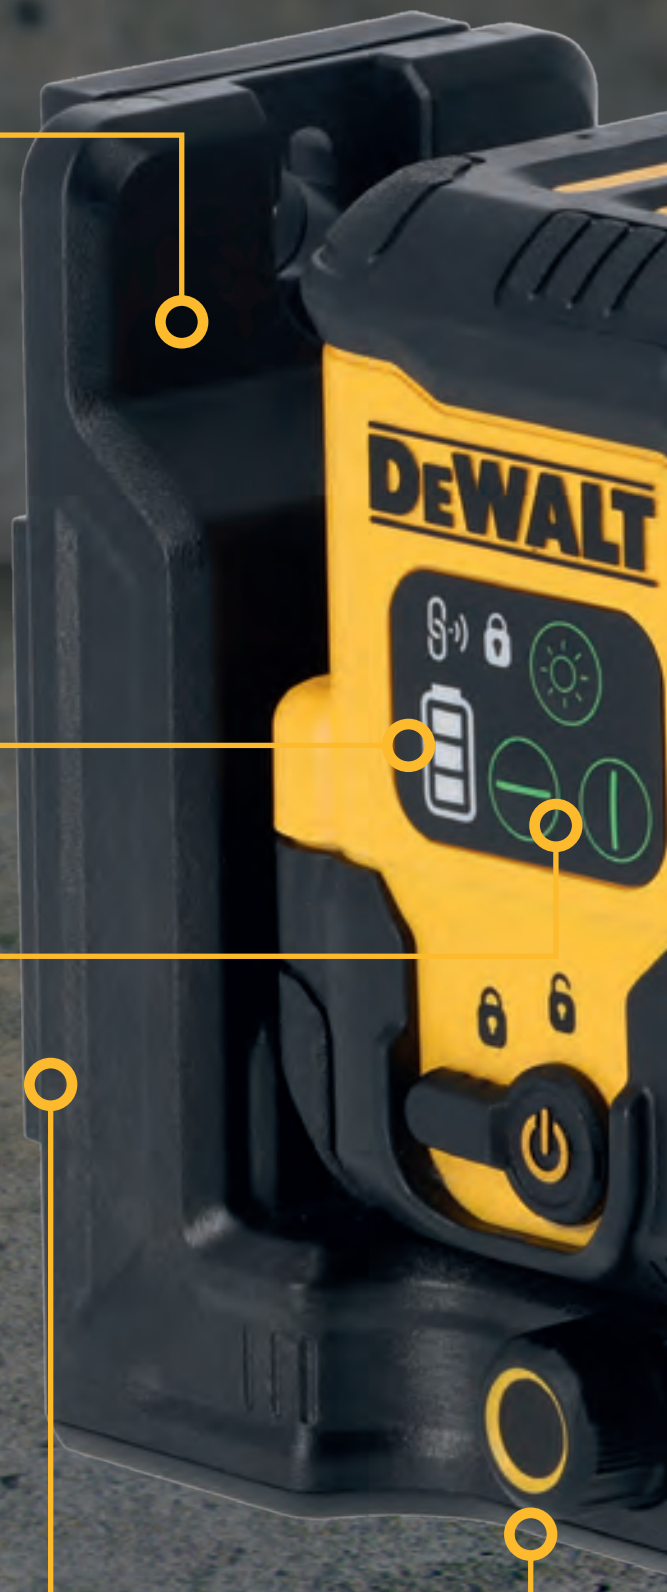

USB INTEGRATED RECHARGEABLE LI-ION BATTERY
Li-ion battery using POWERSTACK™ Technology
11 hour run-time
Charges using USB-C cable in 30 minutes to 80% charge
Laser can be used whilst charging

BATTERY LEVEL INDICATOR
Quickly see the battery charge status

BEAM BRIGHTNESS ADJUSTMENT
Adjust to suit the light levels on the jobsite

PIVOTABLE BRACKET WITH MAGNETS
For flush attachment to metal track and steelwork

Fine adjustment knob
For precise rotational positioning of the laser line

NEW

DEWALT CROSS LINE LASER (GREEN OR RED BEAM)

HIGH VISIBILITY DIODE
Ensures better beam visibility
on the jobsite
Green Beam Diode (DCLE14201GB)
45 M / 100 M w/detector
Red Beam Diode (DCLE14201RB)
30 M / 50 M w/detector

ACCURACY OF +/- 3 MM @ 10 M
Professional accuracy provided to the end user ensures precision on the jobsite.

POSITION SWITCH
Manual Slope/Self Level/
Pendulum Lock

NEW

USB-C CROSS LINE GREEN BEAM LASER, DCLE14201GB

The DCLE14201 Cross Line Laser is a Class 2 laser product. It is a self-leveling laser tool that can be used for horizontal (level) and vertical (plumb) alignment projects.
Professional accuracy provided to the end user ensures precision on the jobsite.
USB Integrated rechargeable Li-ion battery using POWERSTACK™ Technology.
11 hour run-time. Charges using USB-C cable in 30 minutes to 80% charge. Laser can be used whilst charging.
High visibility green beam diode which ensures better beam visibility on the jobsite, 45 meters without detector and 100 meters with detector.

SPECIFICATIONS	
Power	USB (Integral Li-Ion Battery)
Beam color	Green
Line diagram	Cross Line
Laser wavelength	Green: 510nm–530 nm
Laser power	2.0 mW (green) CLASS 2 LASER product
Working range	Green: 45 mtr, 100 mtr with detector (sold separately)
Accuracy (Plumb/Level)	+/-3 mm per 10 mtr
Battery Low	3 LEDs flashing on battery meter
Flashing laser beams	If tilt range exceeded/unit is not level

ART.NR.	PRODUCT DESCRIPTION
DCLE14201GB-XJ	USB-C CROSS LINE GREEN BEAM LASER*

*Compact soft case, wall mount metal plate, USB-C Cable, wall plug NOT included

DEWALT
DEWALT
DEWALT

USB

NEW

USB-C CROSS LINE RED BEAM LASER, DCLE14201RB

The DCLE14201 Cross Line Laser is a Class 2 laser product. It is a self-leveling laser tool that can be used for horizontal (level) and vertical (plumb) alignment projects.
Professional accuracy provided to the end user ensures precision on the jobsite.
USB Integrated rechargeable Li-ion battery.Li-ion battery using POWERSTACK™ Technology.
10 hour run-time. Charges using USB-C cable in 30 minutes to 80% charge. Laser can be used whilst charging.
High visibility red beam diode which ensures visibility on the jobsite, 30 meters without detector and 50 meters with detector.

SPECIFICATIONS	
Power	USB (Integral Li-Ion Battery)
Beam color	Red
Line diagramm	Cross Line
Laser wavelength	Red: 630nm–690 nm
Laser power	1.5 mW (red) CLASS 2 LASER PRODUCT
Working range	Red: 30 mtr, 50 mtr with detector (sold separately)
Accuracy (Plumb/Level)	+/-3 mm per 10 mtr
Battery low	3 LEDs Flashing on Battery meter
Flashing laser beams	If tilt range exceeded/unit is not level

ART.NR.	PRODUCT DESCRIPTION
DCLE14201RB-XJ	USB-C CROSSE LINE RED BEAM LASER*

DEWALT CROSS LINE

CROSS LINE LASER

DW088K-XJ

USB-C CROSS LINE LASER

DCLE14201RB-XJ

CROSS LINE LASER

DW088CG-XJ

USB-C CROSS LINE LASER

DCLE14201GB-XJ

CROSS LINE LASER

12V XR
18V XR

DCE088NG18-QW
DCE088D1G18-QW

CROSS LINE LASER

18V BRUSHLESS XR

DCLE34021N-XJ
DCLE34021D1-QW

MULTI CROSS LINE LASER

DW089CG-XJ

5 SPOT CROSS LINE LASER

DCE0825D1R-QW

5 SPOT CROSS LINE LASER

DCE0825D1G-QW

2 SPOT CROSS LINE LASER

DCE0822D1R-QW

5 SPOT CROSS LINE LASER

12V XR
18V BRUSHLESS XR

DCE825NG18-XJ

2 X 360° CROSS LINE LASER

DCE0811D1R-QW

LASER RANGE 2024

2 X 360° CROSS LINE LASER



DCE0811D1G-QW

3 X 360° CROSS LINE LASER



DCE089D1G-QW

3 X 360° CROSS LINE LASER



DCE089D1R-QW

3 X 360° CROSS LINE LASER


12V XR
18V XR BRUSHLESS

DCE089NG18-XJ
DCE089D1G18-QW

3 X 360° CROSS LINE LASER


18V XR BRUSHLESS

DCLE34031N-XJ
DCLE34031D1-QW

3 X 360° CROSS LINE LASER REMOTECTRL.


18V XR BRUSHLESS

DCLE34035B-XJ
DCLE34035D1-QW

DETECTOR - COMPATIBLE WITH PULSED DEWALT RED BEAM LINE LASERS

50 M RANGE

DE0892-XJ

DETECTOR - COMPATIBLE WITH PULSED DEWALT GREEN BEAM LINE LASERS

100 M RANGE

DE0892G-XJ

LASER TYPES



2 X 360° LINE LASER



2 SPOT CROSS LINE LASER



3 X 360° LINE LASER



5 POINT CROSS LINE LASER



CROSS LINE LASER

RED BEAM

GREEN BEAM

DEWALT TOUG

NEW MOBILE CABINET MODULAR STORAGE SYSTEM (DXL)

– TO BE USED WITH TOUGHSYSTEM 2.0 BOXES

GHSYSTEM® 2.0 DXL™

STORAGE
BUILT TO
HANDLE IT

DEWALT® TOUGHSYSTEM® 2.0 DXL™

DEWALT
DEWALT
DEWALT
DEWALT
DEWALT

MAXIMUM VERSATILITY

OPTIMUM CUSTOMISATION AND MODULARITY SOLUTIONS*

COMBINE

MANY DIFFERENT TOUGHSYSTEM BOXES TO DXL

DIVIDERS

INCLUDED IN THE DRAWERS

PART OF TOUGHSYSTEM 2.0

COMPATIBLE WITH THE TOUGHSYSTEM 2.0 MODULES

EASY TO LOCK

THE CABINET ON SITE (PADLOCKS NOT INCLUDED IN THE KIT)

360° ACCESSIBILITY

TOTAL ROUND ACCESSIBILITY

---

* Accessories like cups, battery holders not available until 2025 in assortment.

DEWALT ULTIMATE MODULA

TSTAK

DWST83344-1

DWST83345-1

DWST1-70705

TSTAK
accessory
set caddy

DT70716-QZ

DWST83541-1

DWST83343-1

DWST83346-1

DWST1-70706

DWST83517-1

DWST1-71229

DWST1-71228

DWST17871-1

DWST83347-1

DWST83411-1

DWST1-71196

DWST82990-1

DWST82968-1

DWST83495-1

DWST1-81078-QW

DWST82991-1

DWST1-72364

DWST82732-1

DWST83520-1

DWST08510-1

DWST08520-1

DWST08530-1

DWST08550-1

ADAPTER PLA
TOUGHCASE-
MODULES TO TO

MORE OPTIONS T
EXTENDED TOUGH

R STORAGE SYSTEM

See video
for the TSTAK and
TOUCHSYSTEM here!

TAK™

SYSTEM®

TE CONNECTS
+ AND TSTAK
UGHSYSTEM 2.0

HAN EVER BEFORE
SYSTEM 2.0 RANGE

HSYSTEM 2.0 DXL™

TOUGHSYSTEM™


DWST83293-1


DWST83294-1


DWST83342-1


DWST83471-QW


DWST83407-1


DWST83394-1


Workshop
racking
DWST1-75694
Carrier
brackets
1-70-362


DWST83295-1


DWST83408-1


DWST1-75654


DWST08061-1


DWST83529-1


DWST08330-1


DWST08017-1


DWST08035-1


DWST83392-1


DWST08017-9


DWST83524-1
DWST83522-1


DWST83459-1


DCB104-QW


DWST60510-1


DWST60520-1


DWST83401-1


DWST83402-1


1-70-324

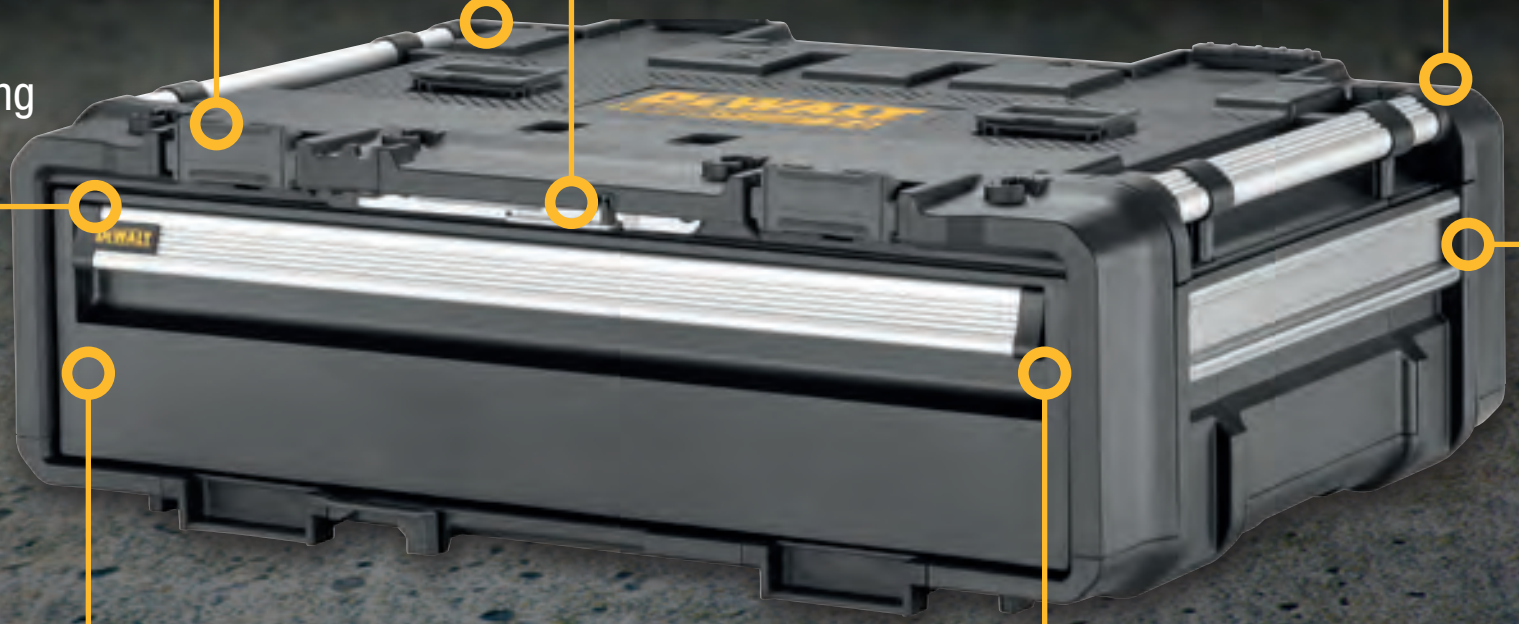

AUTO-STACKING LATCHES:
For fast connectivity with all DXL & TOUGHSYSTEM 2.0 Half and Full width Modules

INTEGRATED LOCKING BAR:
For secure storage of tools on the jobsite

HEAVY-DUTY ALUMINIUM CARRY HANDLES:
For easy transportation

LOCKING ALUMINIUM DRAWER LEVERS:
Prevent accidental opening of drawers in Transit

INTEGRATED TOUGHTRACK:
Providing convenient storage and quick access to tools and accessories

WEATHER SEAL:
To protect tools from water and dust on the jobsite

BALL BEARING DRAWER SLIDERS:
Allows for smooth reliable opening and durability

DEWALT TOUGHSYSTEM 2.0 DXL

NEW

TOUGHSYSTEM 2.0 DXL DEEP DRAWER, DWST08510-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions
Drawer units are a very popular modules for end users providing quick and easy access to Tools
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite, seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS	
Drawer dimensions:	64.5 cm x 47 cm x 14.5 cm
Drawer volume:	47 Litre
Load Capacity:	25 kg

ART.NR.	PRODUCT DESCRIPTION
DWST08510-1	TOUGH SYSTEM 2.0 DXL DEEP DRAWERS

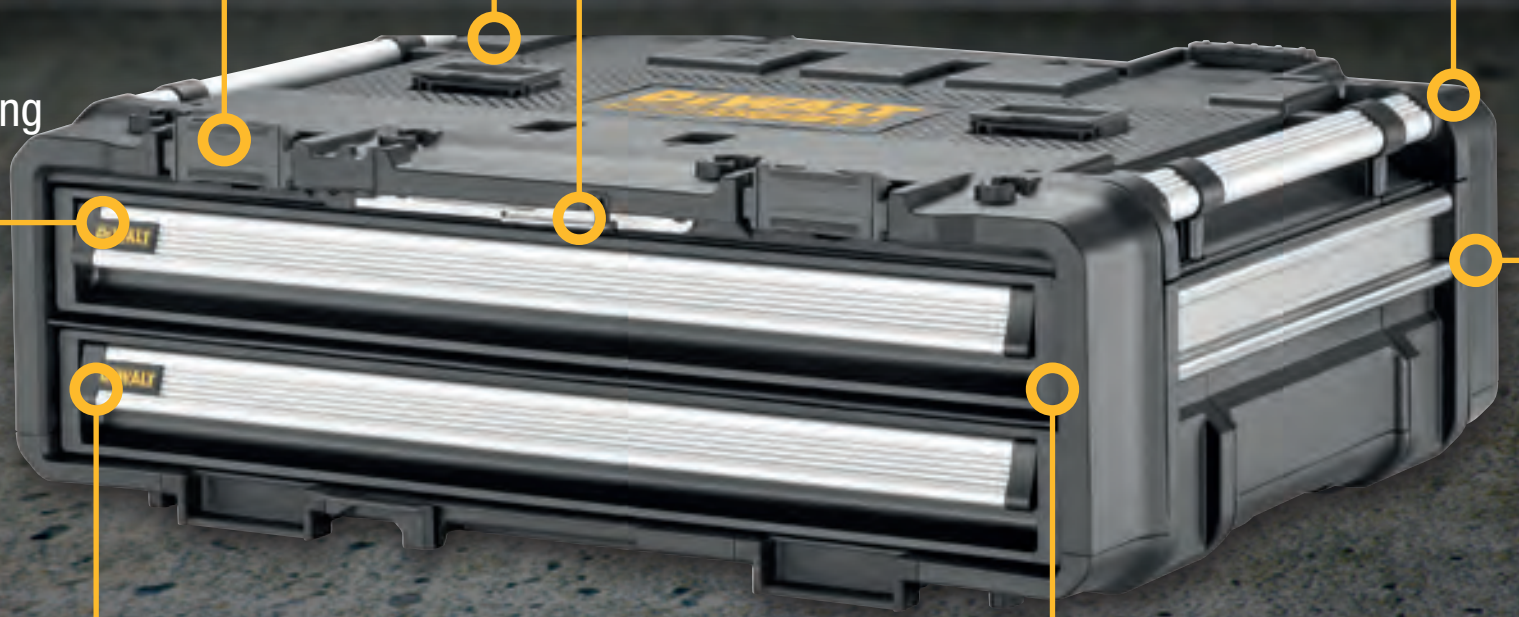

AUTO-STACKING LATCHES:
For fast connectivity with all DXL & TOUGHSYSTEM 2.0 Half and Full width Modules

INTEGRATED LOCKING BAR:
For secure storage of tools on the jobsite

HEAVY-DUTY ALUMINIUM CARRY HANDLES:
For easy transportation

LOCKING ALUMINIUM DRAWER LEVERS:
Prevent accidental opening of drawers in Transit

INTEGRATED TOUGHTRACK:
Providing convenient storage and quick access to tools and accessories

WEATHER SEAL:
To protect tools from water and dust on the jobsite

BALL BEARING DRAWER SLIDERS:
Allows for smooth reliable opening and durability

DEWALT® TOUGHSYSTEM® 2.0 DXL™

NEW

TOUGHSYSTEM 2.0 DXL SHALLOW DRAWER, DWST08520-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions
Drawer units are a very popular modules for end users providing quick and easy access to Tools
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite ,seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS	
Drawer dimensions:	64.5 cm x 47 cm x 6 cm
Drawer Volume:	42.8 Litre
Load Capacity:	25 kg (12.5 kg per. drawer)

ART.NR.	PRODUCT DESCRIPTION
DWST08520-1	TOUGH SYSTEM 2.0 DXL SHALLOW DRAWERS

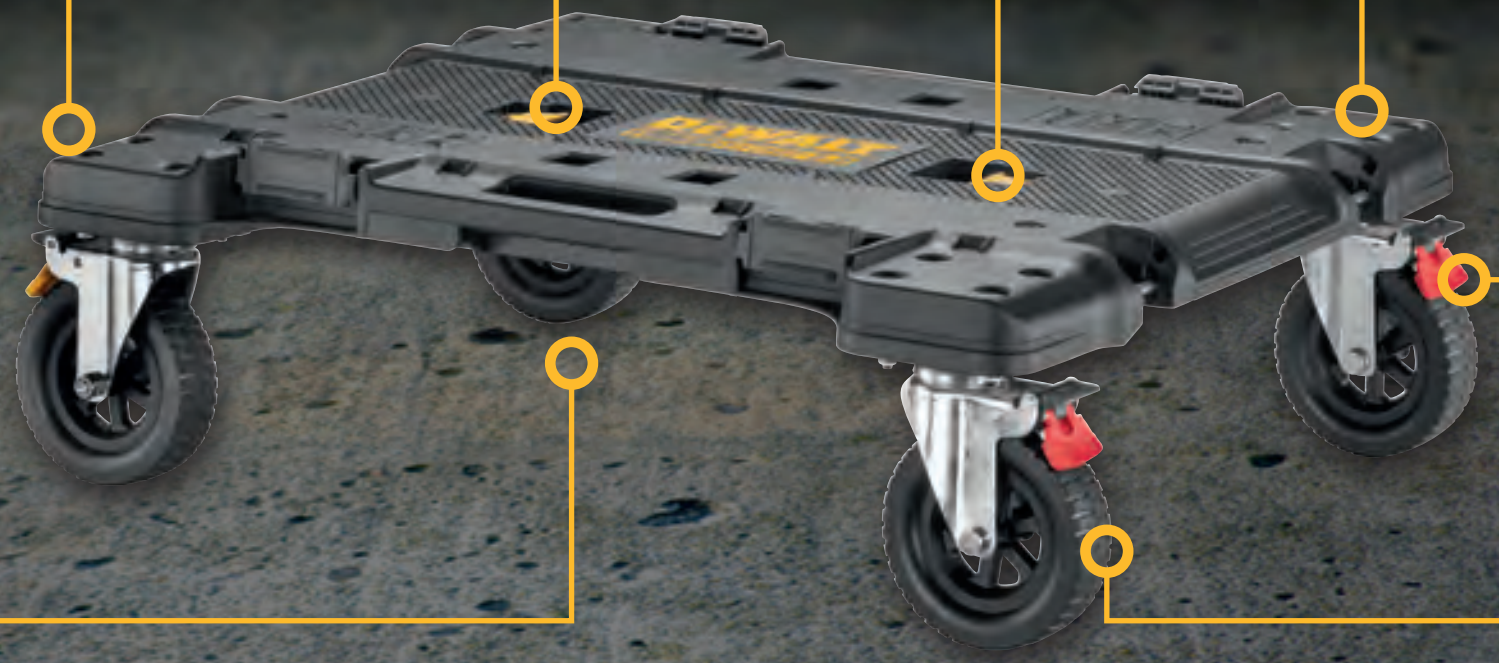

CASTER LOCKING:
Allows user to switch between swivel and fixed for maximum manoeuvrability

AUTO-STACKING LATCHES:
For fast connectivity will all DXL & TOUGHSYSTEM 2.0 Half and Full width Modules

RATCHET BELT SLOTS:
For securing loose items to the dolly or stack.

CASTER BRAKES:
Allows user to apply brake to secure dolly

CARRY HANDLES:
For easy transportation

5” ALL TERRAIN WHEELS:
For easy manoeuvrability over rough and uneven surfaces.

NEW

TOUGHSYSTEM 2.0 DXL DOLLY, DWST08530-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions
Drawer units are a very popular modules for end users providing quick and easy access to Tools
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite ,seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS	
Load capacity:	200 kg

ART.NR.	PRODUCT DESCRIPTION
DWST08530-1	TOUGH SYSTEM 2.0 DXL DOLLY

RASIED EDGES:
Prevents items rolling off the work surface & provides stable base to add sheet of ply board

20” X 26” XL WORKING SURFACE:
Converts your storage system into a large workbench

TS 2.0 BIN SLOTS
For convenient storage of small parts and accessories

DUAL USE DEEP STORAGE/ CUP HOLDER

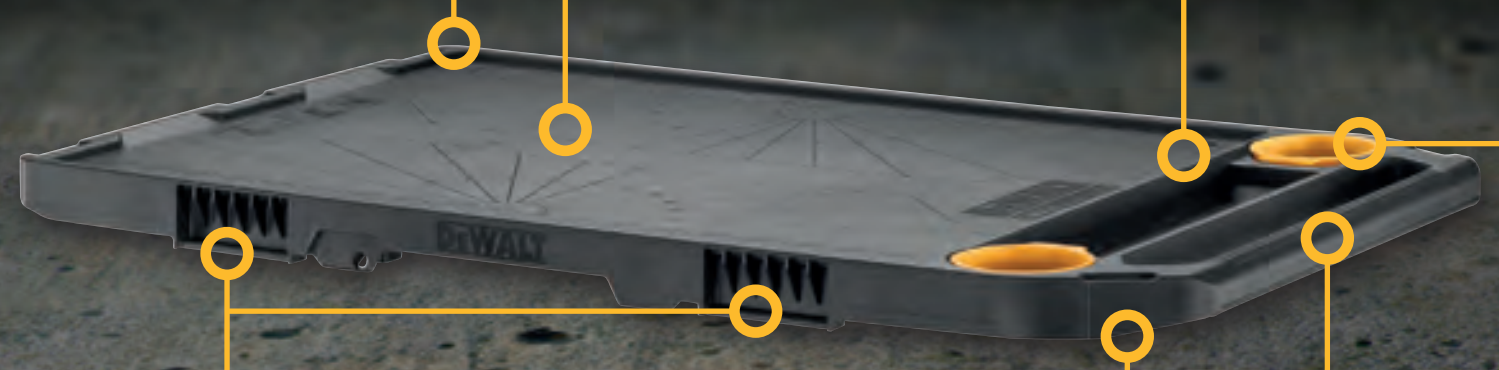

COMBATIBILTY:
Direct Connectivity with DXL & TOUGHSYSTEM 2.0 modules

WIDE ERONOMIC HANDLE:
For comfort and control during transportation

POWER TOOL HOOK SLOT
Providing convenient storage and quick access to Power tools

DEWALT TOUGHSYSTEM 2.0 DXL

NEW

TOUGHSYSTEM 2.0 DXL WORK TOP, DWST08550-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions
Drawer units are a very popular modules for end users providing quick and easy access to Tools
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite ,seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS

The Worktop should be attached on top of one of the drawer modules.

ART.NR.	PRODUCT DESCRIPTION
DWST08550-1	TOUGH SYSTEM 2.0 DXL TOP

5IN1 TOWER

SECURE ESSENTIALS

TOUGH-TERRAIN WHEELS

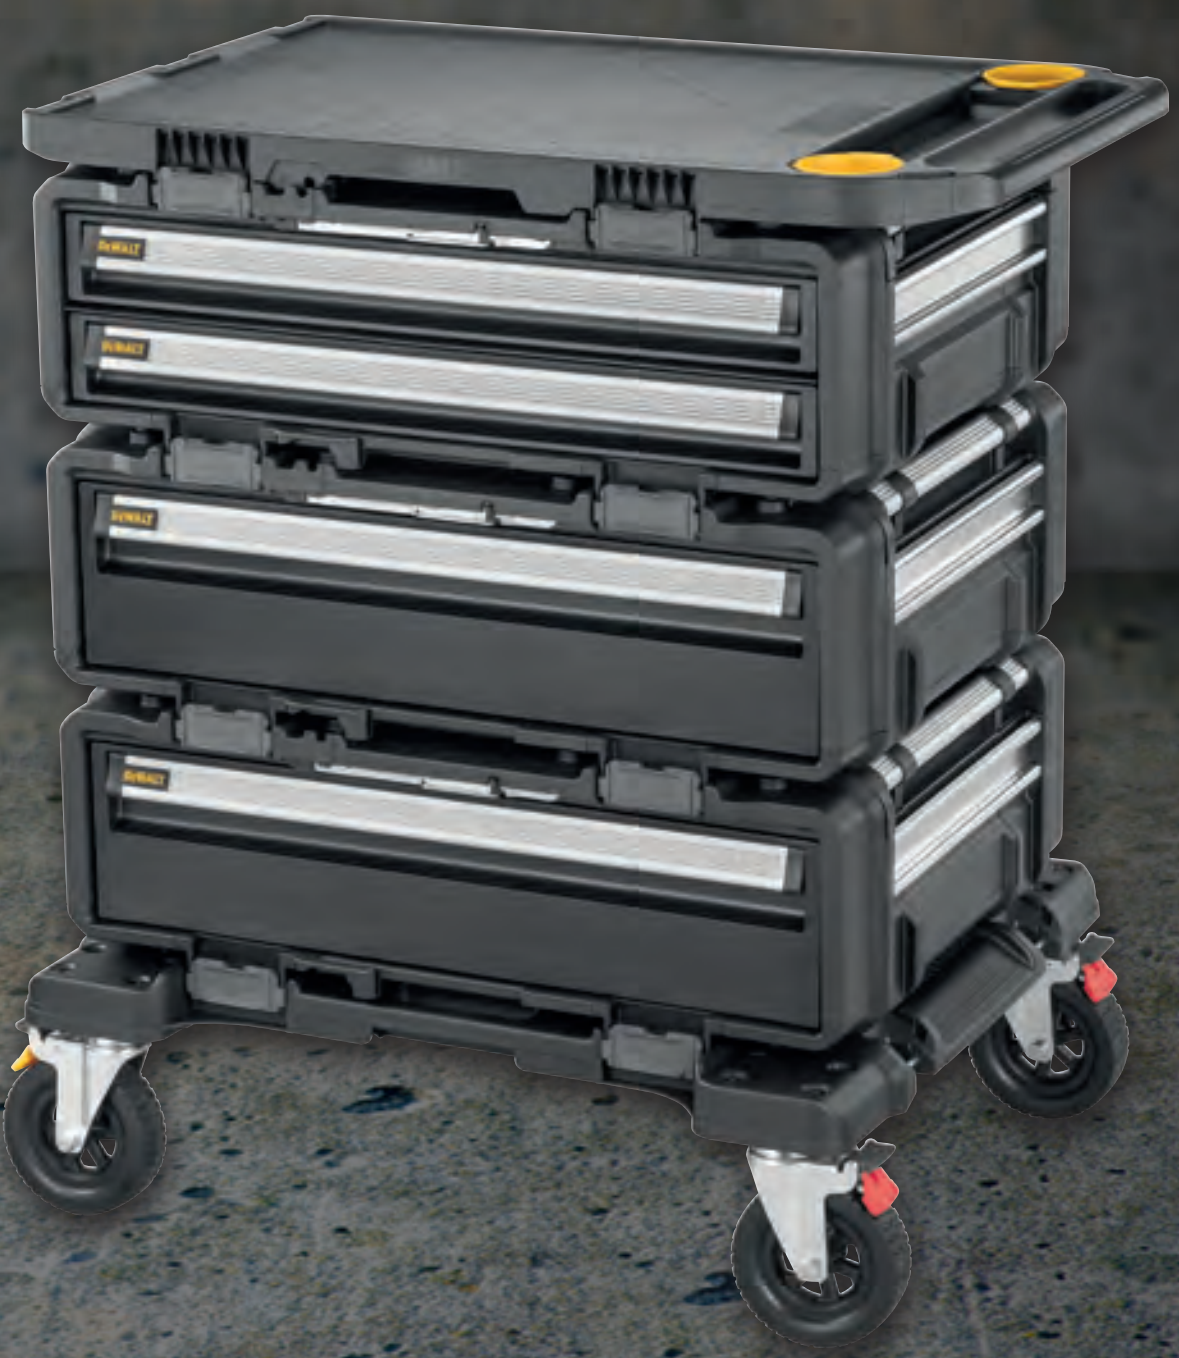



Tools and accessories sold separately.
SMOOTH-OPEN, SECURE-SHUT DRAWERS
METAL BALL-BEARING SLIDES AND AUTOMATIC
QUICK-LATCHING MECHANISM

Tools and accessories sold separately.
OPTIMIZE ORGANIZATION
CUSTOM INTERNAL STORAGE

DEWALT TOUGHSYSTEM 2.0 DXL

NEW

TOUGHSYSTEM 2.0 DXL 5 IN 1 TOWER, DWST60510-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions.
Drawer units are a very popular modules for end users providing quick and easy access to Tools.
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite ,seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS

- Heavy Duty aluminum and ABS construction for quality and durability.
- Integrated Locking bar for secure storage of tools on the job site
- Integrated TOUGHTRACK for quick access to Tools and Accessories
- Heavy duty aluminum carry handles for easy transportation
- Weather seal to protect tools from water & dust
- Locking Aluminum drawer levers prevent drawers opening in transit
- Autostacking latches for quick and easy connectivity

ART.NR.	PRODUCT DESCRIPTION
DWST60510-1	TOUGH SYSTEM 2.0 DXL 5 IN 1 TOWER

4IN1 TOWER

Tools and accessories sold separately.
OPTIMIZE ORGANIZATION

SMOOTH-OPEN, SECURE SHUT-DRAWERS
Tools and accessories sold separately.

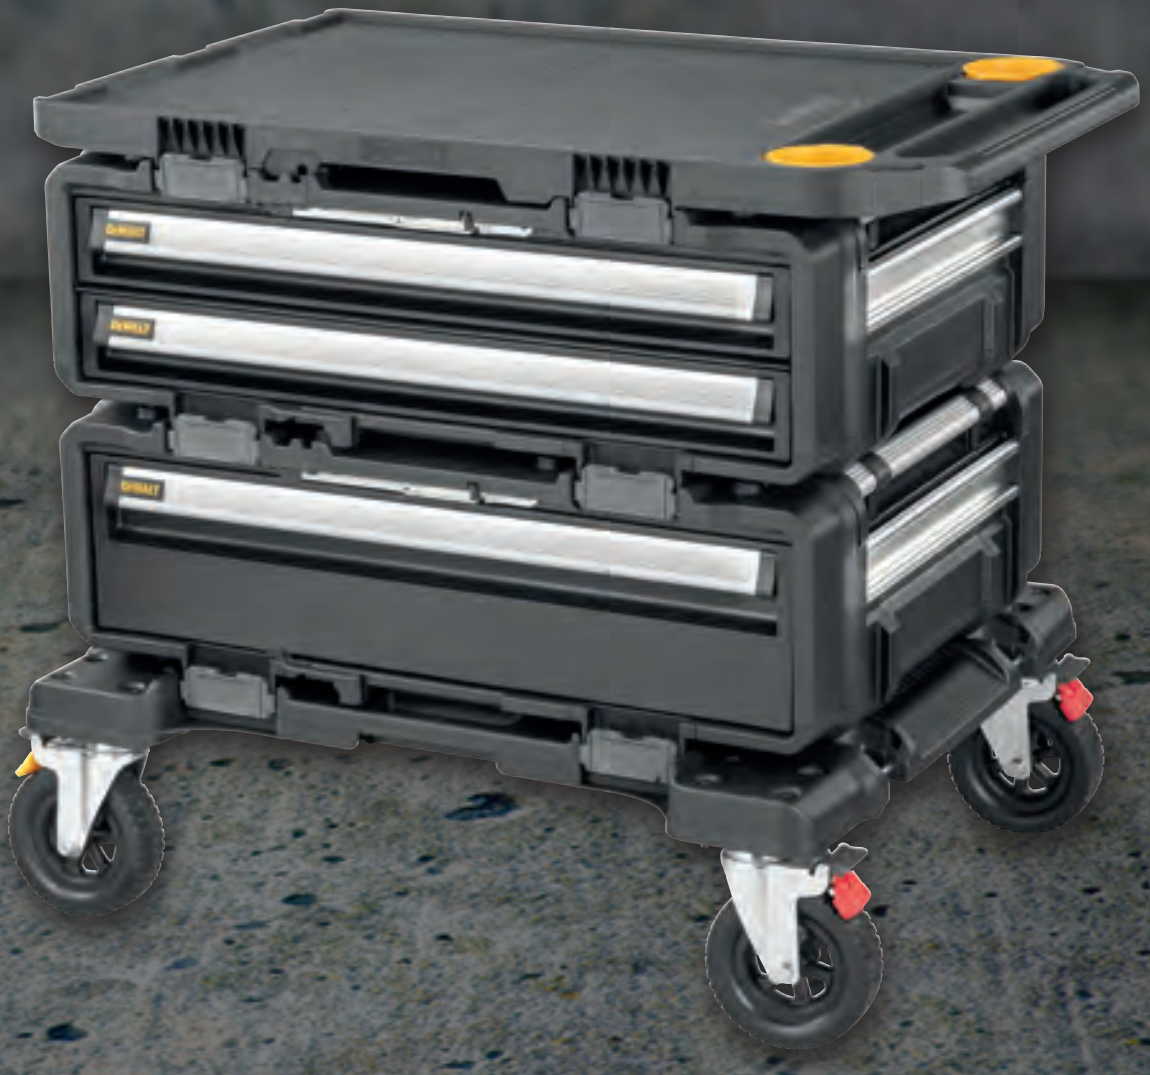

DEWALT TOUGHSYSTEM 2.0 DXL

Tools and accessories sold separately.
INDUSTRY'S FIRST 360° MODULAR WORKSTATION**
**TOUGHSYSTEM® 2.0 DXL™ and TOUGHSYSTEM® 2.0 modules combine to create the industry's first 360-degree modular workstation.

ROBUST CARRYHANDLES TO OPTIMIZE ERGONOMICS

Tools and accessories sold separately.
INDUSTRY´S FIRST 360° MODULAR WORKSTATION**
**TOUGHSYSTEM® 2.0 DXLTM AND TOUGHSYSTEM® modules combine to create the industry´s first 360-degree modular workstation.

NEW

TOUGHSYSTEM 2.0 DXL 4 IN 1 TOWER, DWST60520-1

TOUGHSYSTEM storage system has now been in the market since 2011. To continue the strong growth momentum and keep ahead of market innovations DEWALT decided to come to market with an upgraded innovative solution.
Systems is our fastest growing Storage category, and this trend is set to continue with end users demanding higher levels of customization versus traditional Tool storage solutions.
Drawer units are a very popular modules for end users providing quick and easy access to Tools.
Investing into the DXL storage system the user will get a complete 360-degree workstation for the jobsite ,seamless direct connectivity to existing DeWalt TOUGHSYSTEM modules.

SPECIFICATIONS

- Heavy Duty aluminum and ABS construction for quality and durability.
- Integrated Locking bar for secure storage of tools on the job site
- Integrated TOUGHTRACK for quick access to Tools and Accessories
- Heavy duty aluminum carry handles for easy transportation
- Weather seal to protect tools from water & dust
- Locking Aluminum drawer levers prevent drawers opening in transit
- Autostacking latches for quick and easy connectivity

ART.NR.	PRODUCT DESCRIPTION
DWST60520-1	TOUGH SYSTEM 2.0 DXL 4 IN 1 TOWER

TRANSFORM TO PERFORM™

NEW -IMPACT ATTACHMENT PVC/PEX PIPE CUTTER

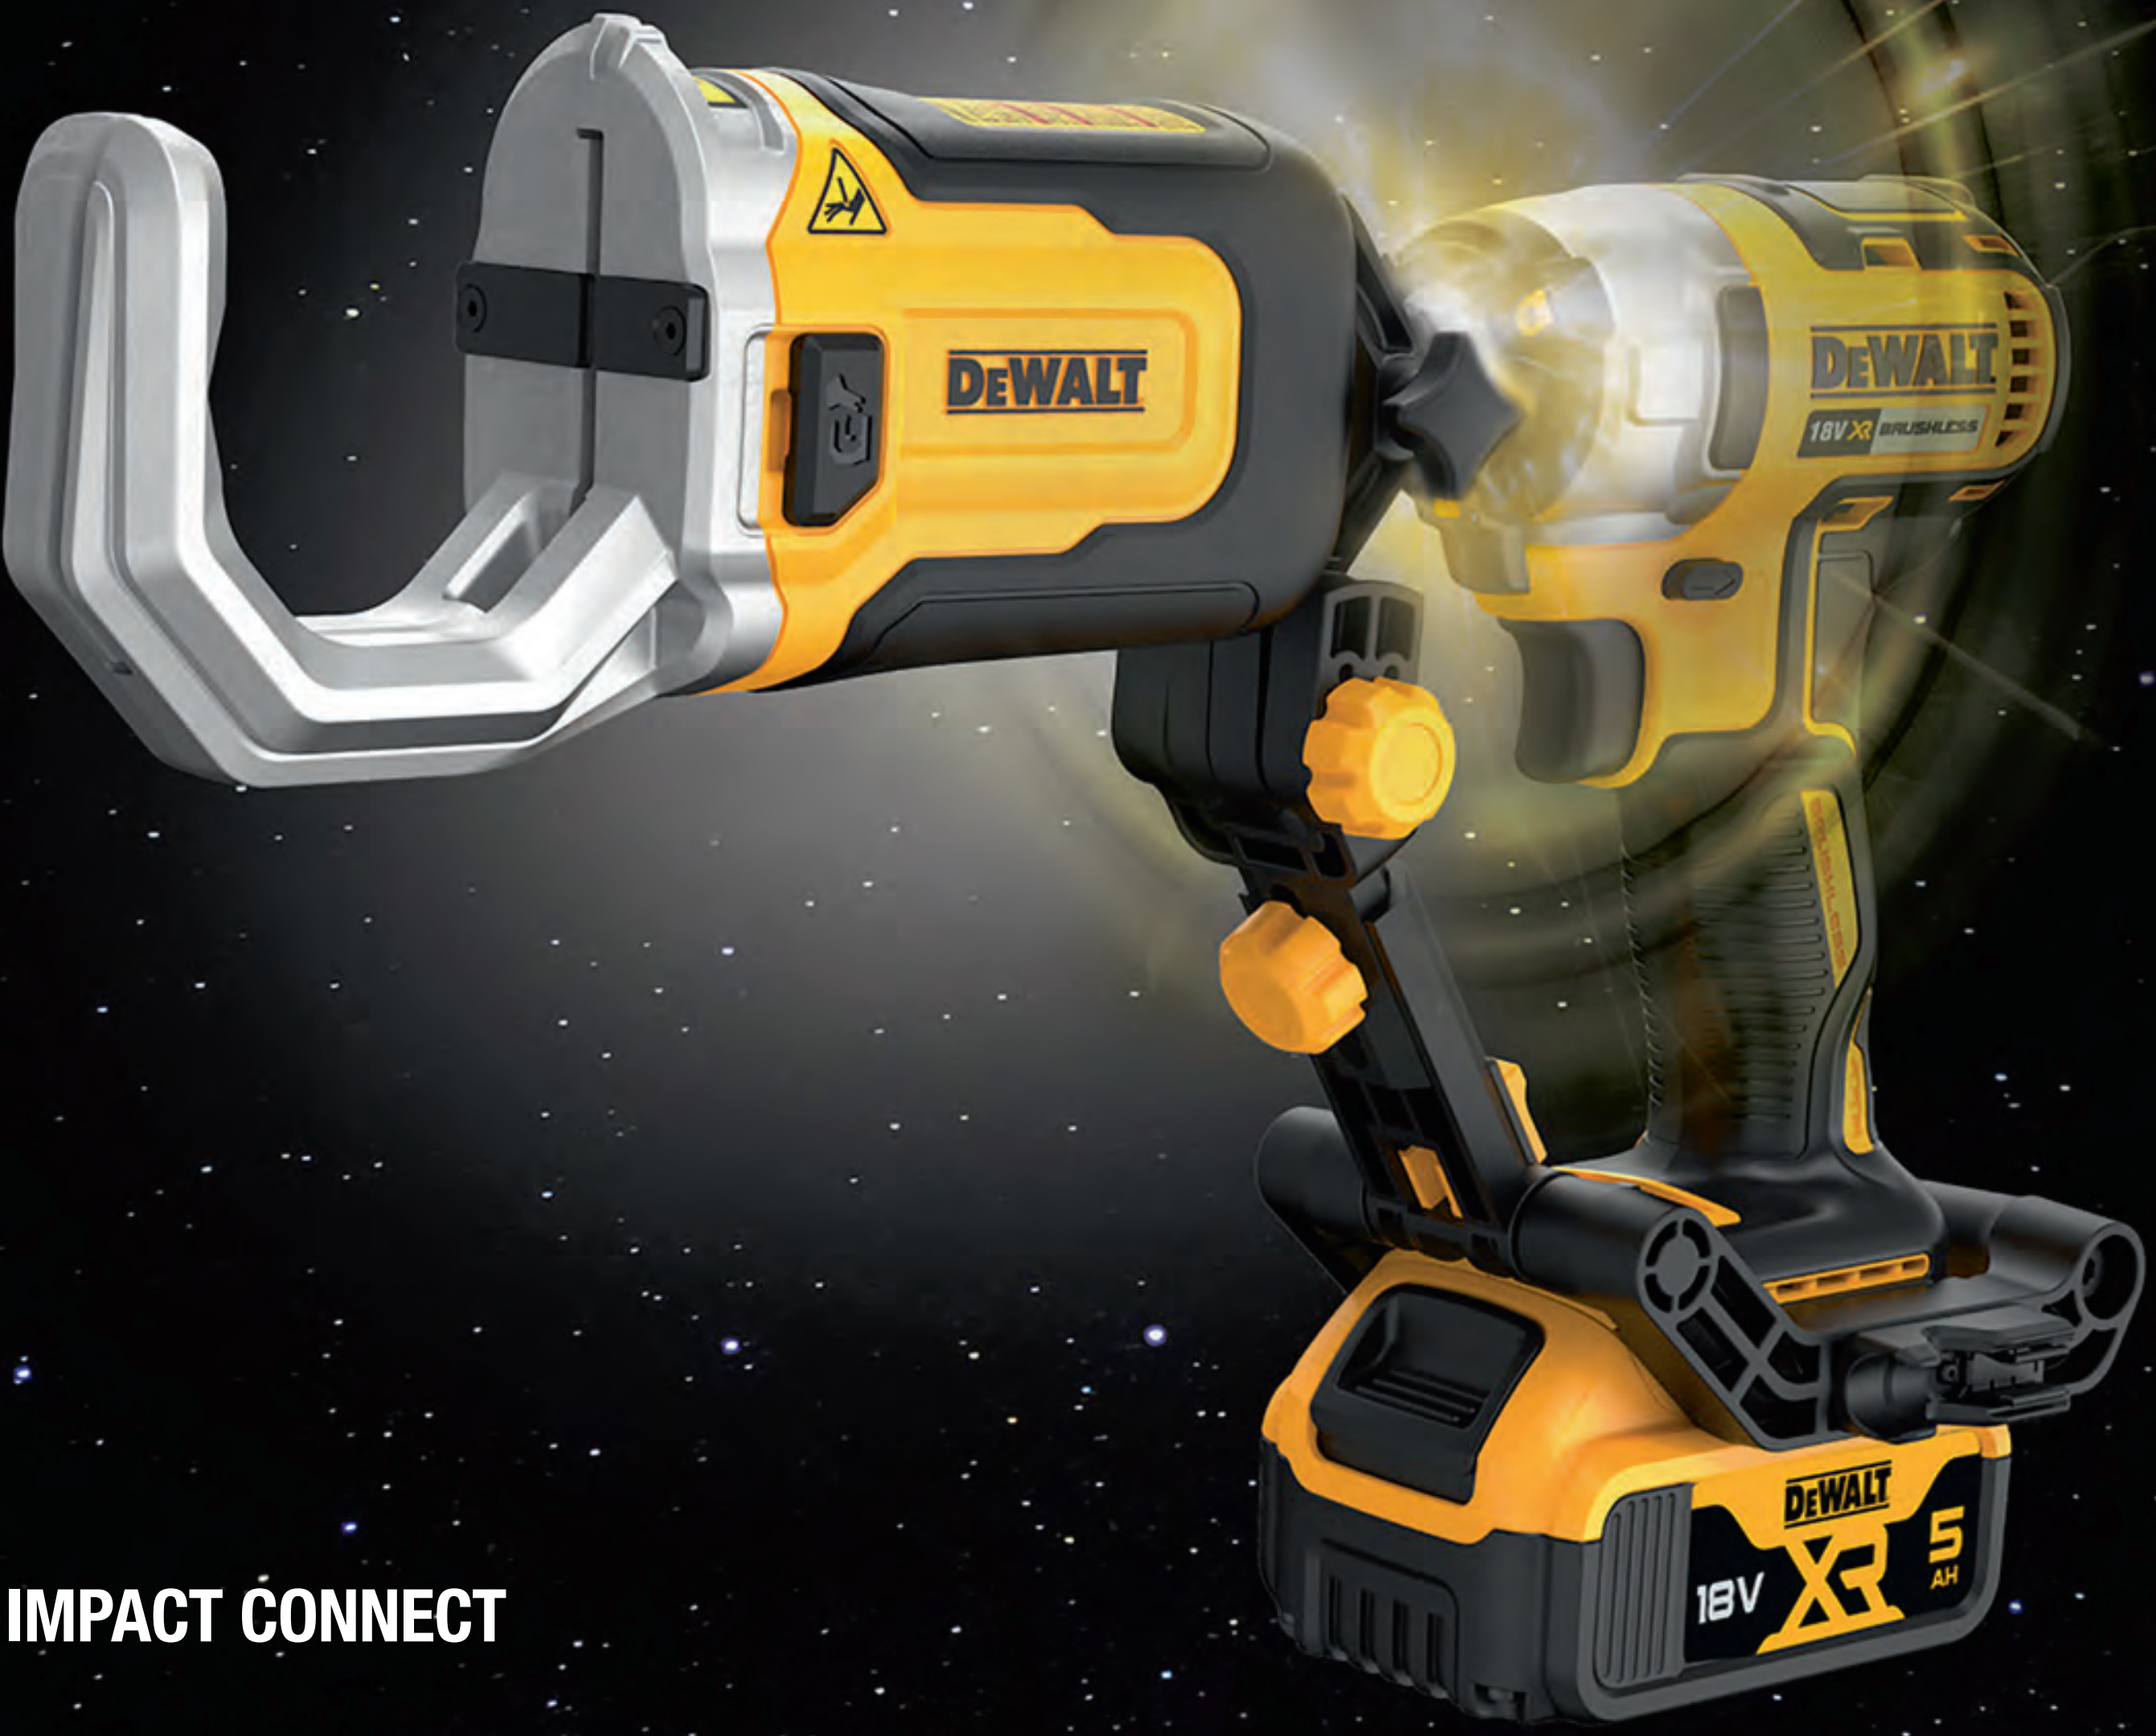
DEWALT
DEWALT
18V XR BRUSHLESS
DEWALT
18V XR
5 AH

IMPACT CONNECT

IMPACT CONNECT™

Tool sold separately

DEWALT
6X FASTER CUTS
THAN USING A HAND TOOL†

NEW

IMPACT ATTACHMENT PVC/PEX PIPE CUTTER, DT20560

Dewalt PVC/PEX pipe cutter attachment offers up to 6X faster cuts in PVC/PEX pipes than dedicated hand tools. With a cut capacity up to 50 mm, this impact driver attachment offers increased productivity with reduced strain.

The universal connection works with most brands and allows for quick changes between different impact driver applications.

ART.NR.	PRODUCT DESCRIPTION
DT20560-QZ	Impact Attachment PVC/PEX Pipe Cutter

NEW -IMPACT CONNECT DIAMOND GRIT INSIDE PIPE CUTTER

Tool sold separately

2x FASTER CUTS

2X FASTER CUT†
MAXIMIZE CUTTING SPEED POTENTAL

CORROSION RESISTANT
BLACK-ANODIZED BARREL HELPS COMBAT RUST DAMAGE

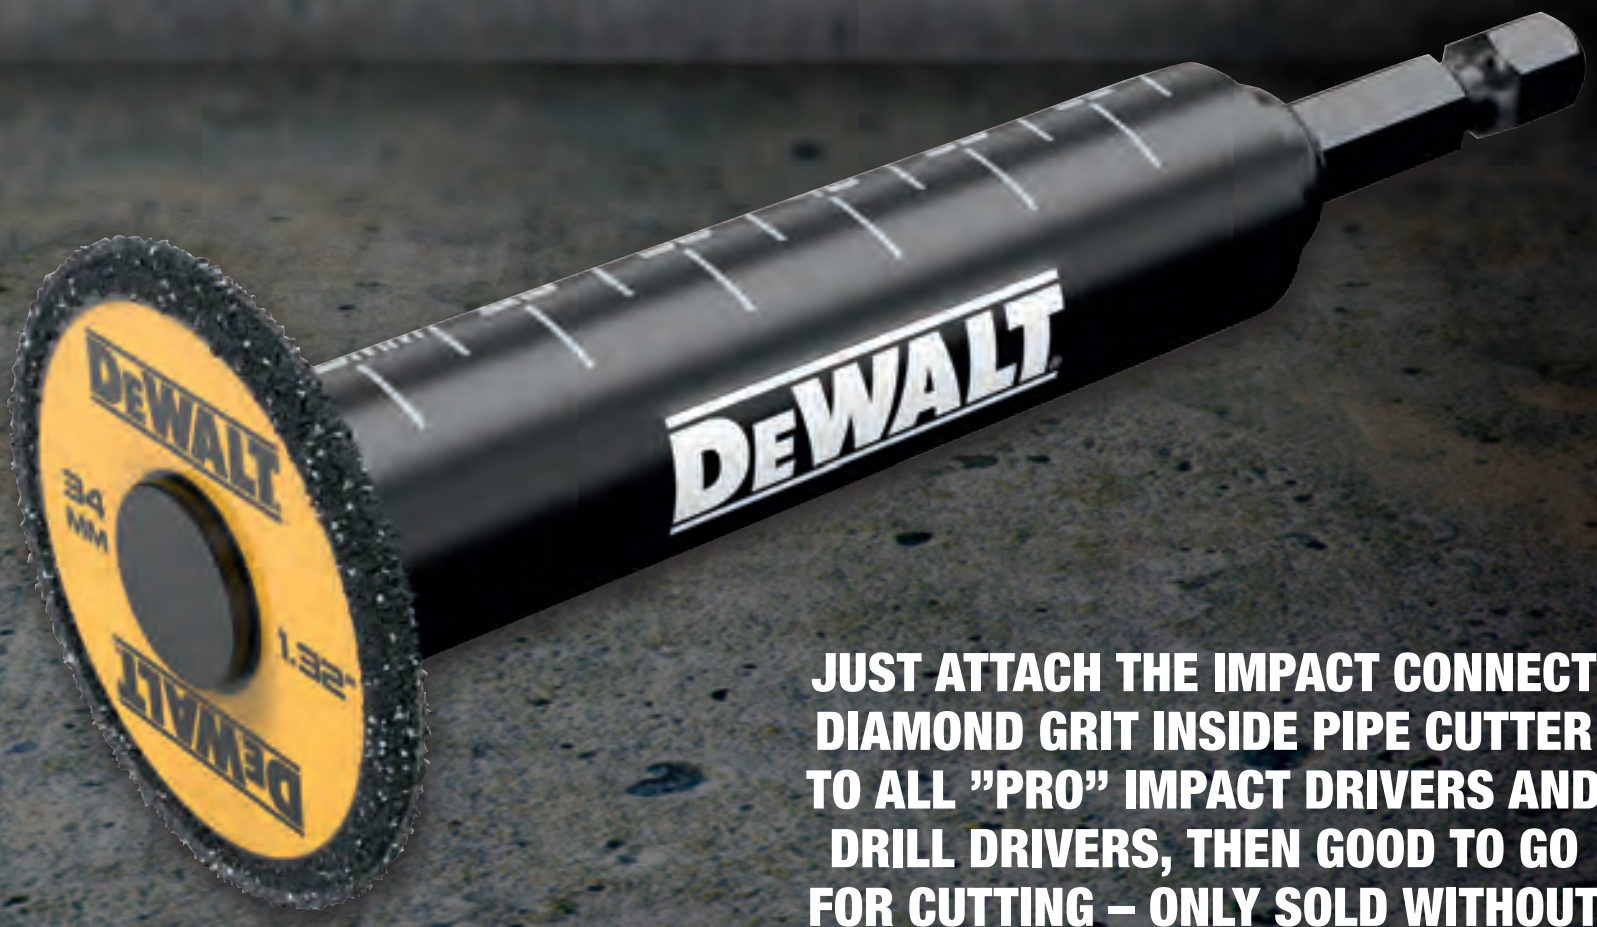

JUST ATTACH THE IMPACT CONNECT DIAMOND GRIT INSIDE PIPE CUTTER TO ALL "PRO" IMPACT DRIVERS AND DRILL DRIVERS, THEN GOOD TO GO FOR CUTTING – ONLY SOLD WITHOUT DEWALT IMPACT DRIVER

NEW

IMPACT CONNECT DIAMOND GRIT INSIDE PIPE CUTTER, DT20563

Take on tough cutting applications with the diamond grit cutting wheel designed for fast cutting and longer life.
Cut a wide range of PVC pipe sizes up to 200mm.
With the permanently fixed blade that prevents falling off during use.
Compatible with all impact drivers and drills that accept a ¼ in. hex shank.

ART.NR.	PRODUCT DESCRIPTION
DT20563-QZ	Impact Connect Diamond Grit Inside Pipe Cutter

† VS. LEGACY IRWIN IRA81643 PVC PIPE CUTTER WHEN CUTTING 2" SCHEDULE 40 PVC PIBE EMBEDDED IN 6800PSI CONCRETE USING DCF887 IMPACT DRIVER, DCBP034 BATERY, AND DW0521 IMPACT CHUCK (SOLD SEPARATELY).

GLASS APPLICATIONS*

WOOD APPLICATIONS

CONCRETE APPLICATIONS

CONCRETE APPLICATIONS

18V XR

NEW

DEWALT 18V XR GRABO SUCTION LIFTER, DCE590N

18V XR
DEWALT
2.0Ah
GRABO LIFTER

CORDLESS VACUUM LIFTER FOR LIFTING, CARRYING AND HANDLING VARIOUS CONSTRUCTION MATERIALS.

---

* “When lifting glass materials with the suction lifter, the minimum glass thickness should be 6 mm”

DEWALT
18V XR
DEWALT
GRABO LIFTER

DEWALT
GRABO LIFTER
GRABO LIFTER

18V XR

NEW

18V XR GRABO SUCTION LIFTER, DCE590N

The DCE590 is a lifting tool that is designed for professional lifting, moving, and placing objects like stone pavers, tiles, drywall, furniture and large appliances. Heavy duty performance, intuitive user experience makes task completion easier & quicker. Quicker material handling, no need for two people. Speeds up application and minimized material damage with all day run time.
HORIZONTAL : Material laying flat on ground. A single DCE590 offers up to 120 kg of horizontal lifting force under ideal conditions.
VERTICAL: Material on its edge. A single DCE590 offers up to 60 kg of vertical lifting force under ideal conditions.
For increased lifting capacity use two DCE590 vacuum lifters

SPECIFICATIONS	
Power	18V
Rated Load (kg)	120 (Horizontally), 60 (Vertically)
Operation Temperature (˚C)	-10 – 40 ˚C
Weight without akku (kg)	1,6 kg

ART.NR.	PRODUCT DESCRIPTION
DCE590N-XJ	DEWALT18V GRABO 18V SUCTION LIFTER – SOLO
DZE591-XJ	DEWALT 18V GRABO 18V - SPARE SEALING



SECURE BLADE LOCK

SMOOTH BLADE CHANGES
Slide-and clic replacement system

ONE HANDED OPERATION
Smooth push and flip opening

COMFORTABLE CARRY
Ergonomically designed handle

NEW

FIXED FOLDING KNIFE, DWHT10991-0

Working knife with superior stability with powdered metal nose for reduced wobble.
The dual lock system gives superior blade and to make it jobsite tough the knife has a full metal body.
The quick-change lever prevents accidental blade release.
The knife also gives maximum blade exposure for extra cutting clearance.
You can open and close the knife with flick of the wrist.
The knife design has an upgraded comfort with optimal ergonomics and weight for extended cutting.

SPECIFICATIONS	
Opening/Locking	Push Button
Blade Change	Steel Spring Lever
Blade Wobble	0.25mm
Blade Retention	2600 N
Adjustable Belt Clip	Yes

ART.NR.	PRODUCT DESCRIPTION
DWHT10991-0	FIXED BLADE FOLDING KNIFE

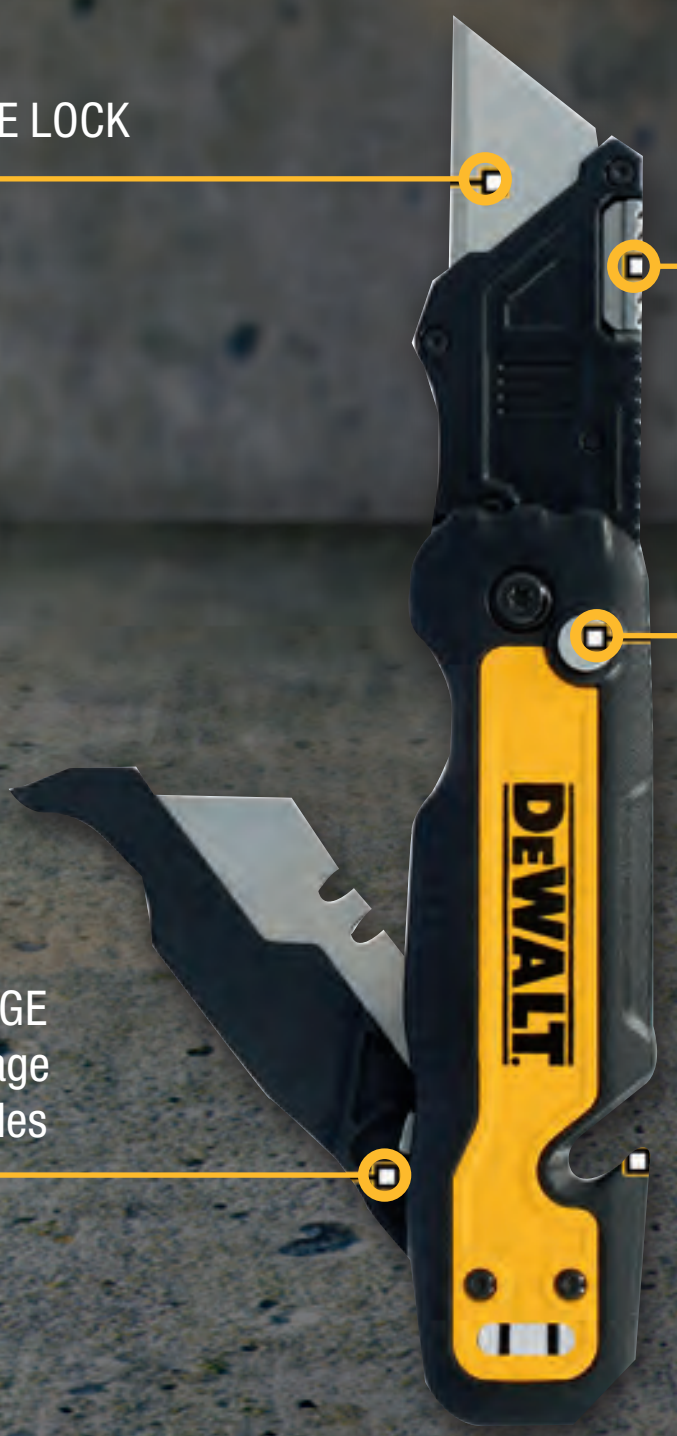

SECURE BLADE LOCK

SMOOTH BLADE CHANGES
Slide-and clic replacement system

ONE HANDED OPERATION
Smooth push and flip opening

INTERNAL
BLADE STORAGE
On-board storage for up to 5 blades

NEW

FIXED BLADE FOLDING KNIFE + STORAGE, DWHT10992-0

Working knife with superior stability with powdered metal nose for reduced wobble.
The dual lock system gives superior blade and to make it jobsite tough the knife has a full metal body.
The quick-change lever prevents accidental blade release.
The knife also gives maximum blade exposure for extra cutting clearance.
You can open and close the knife with flick of the wrist.
The knife design has an upgraded comfort with optimal ergonomics and weight for extended cutting.
To keep up the speed on site the the knife has an on-board blade storage with 5 blade capacity.

SPECIFICATIONS	
Opening/Locking	Push button
Blade change	Steel spring lever
Blade wobble	0.25 mm
Blade retention	2600 N
Blade storage capacity	5
Adjustable belt clip	Yes

ART.NR.	PRODUCT DESCRIPTION
DWHT10992-0	FIXED BLADE FOLDING KNIFE + STORAGE

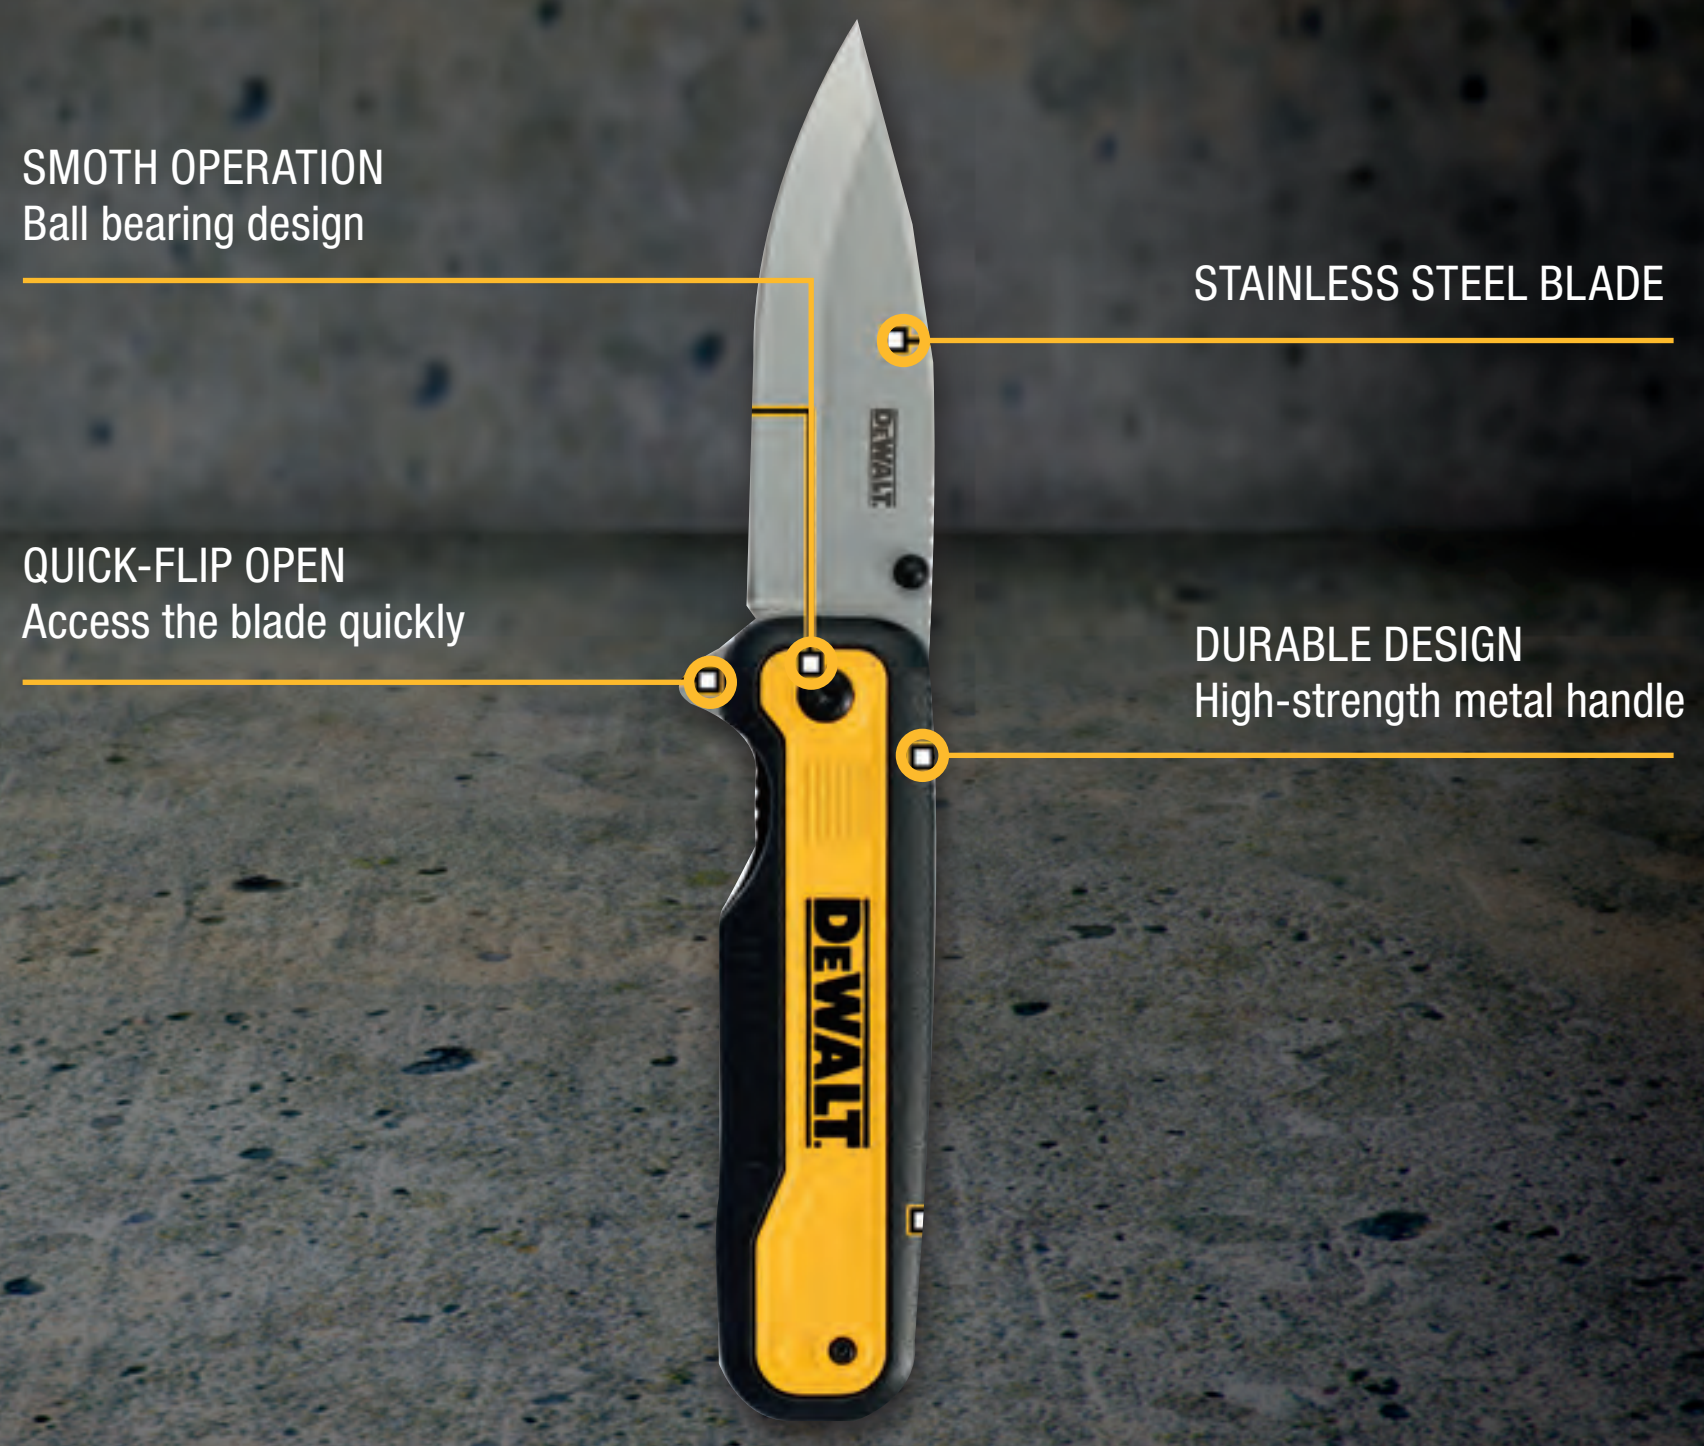
SMOTH OPERATION
Ball bearing design
STAINLESS STEEL BLADE
QUICK-FLIP OPEN
Access the blade quickly
DURABLE DESIGN
High-strength metal handle
DEWALT

NEW

FOLDING POCKET KNIFE, DWHT10993-0

Handy folding knife with an upgraded design and functionallyty.
To make the knife jobsite tough, it has a full metal body with a slim handle, 12 mm thickness for compactness.
The knife blade is a stainless steel blade, stone washed to give sustained sharpness.
To gives the knife a good functionality on the jobsite, it is equipped with a reversible deep carry wire pocket clip and has a fast flipper blade opening, so it opens and closes with a flick of the wrist.
To have a smooth pivot action the knifes also has ball bearing design.

SPECIFICATIONS	
Opening/locking	Optimized fast flip
Blade length	82 mm
Handle	Metal
Blade finish	Stone wash
Steel type	7Cr
Ball bearing	Yes
Adjustable belt clip	Yes

ART.NR.	PRODUCT DESCRIPTION
DWHT10993-0	FOLDING POCKET KNIFE

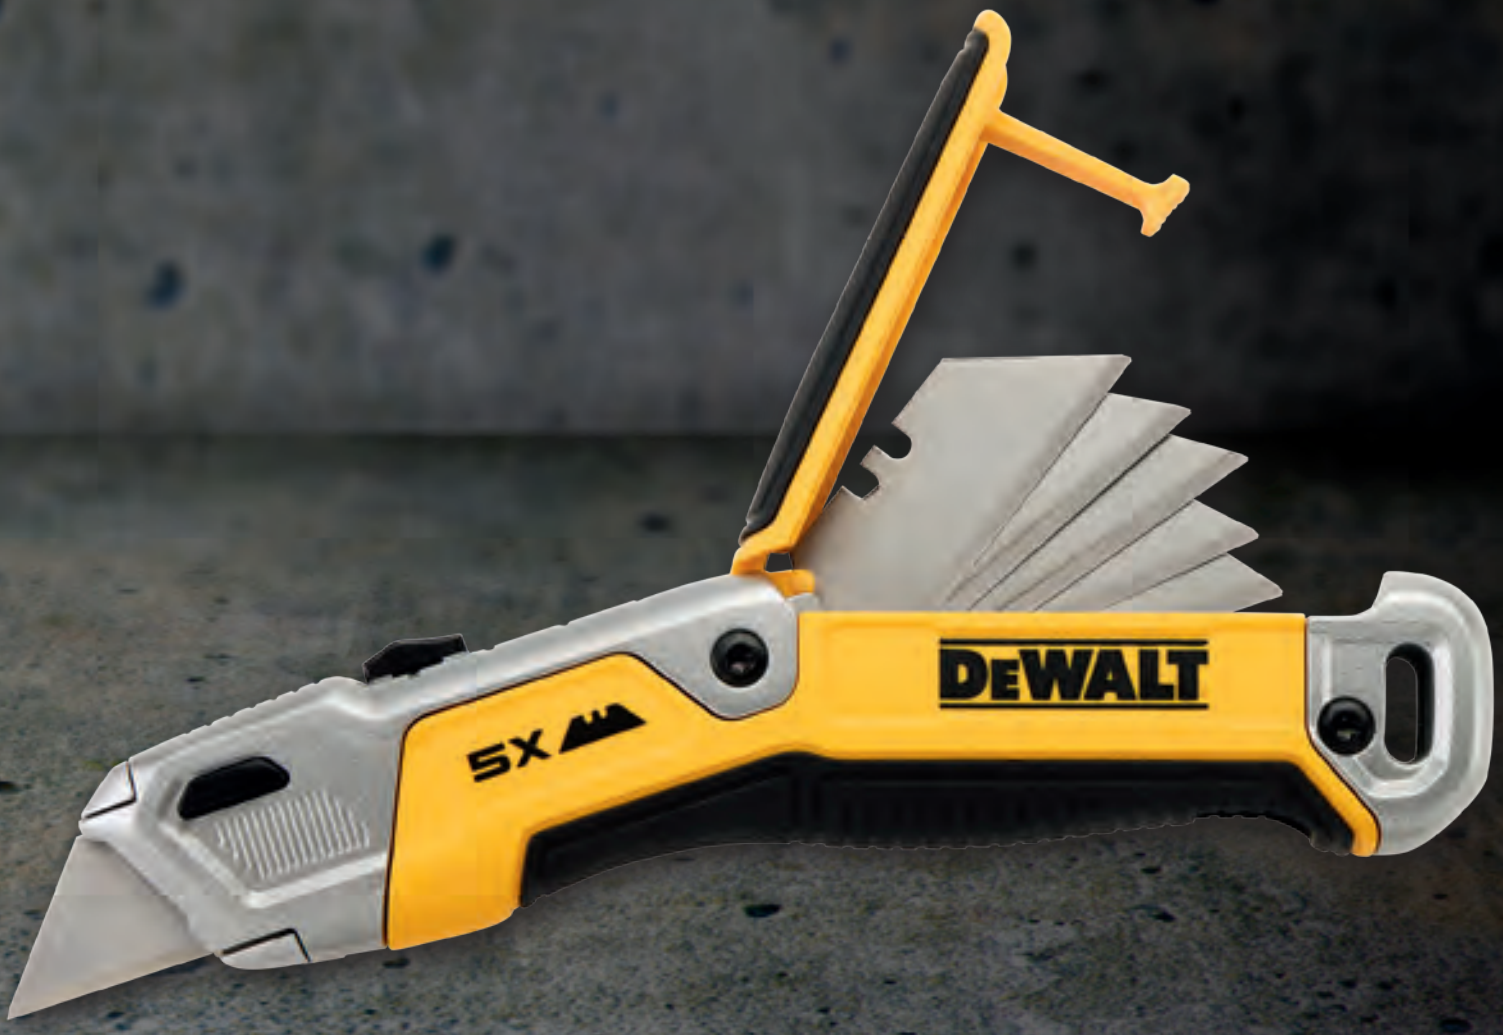

NEW

FIXED BODY RETRACTABLE KNIFE + STORAGE, DWHT10998-0

This working kniofe has the best in class blade slider mechanism & blade retention. Full metal body, improved drop rating.
For accurate cutting, this knife has an improved design with less blade wobble and higher blade retention force.
Press free blade change, and on board blade storage.
The knife has a smoot blade install push button release and insertion for quick blade change.
As well textured grip points for controlled cutting.
The on board blade storage holds 5 blades.
Press steel slider with added spring for smoother feel.

SPECIFICATIONS	
Debris slider life cycle	20,000
Drop rating	6 meters
Striking/Impact	Nose strike cap
Slider smoothness	Very good

ART.NR.	PRODUCT DESCRIPTION
DWHT10998-0	FIXED BODY RETRACTABLE KNIFE + STORAGE

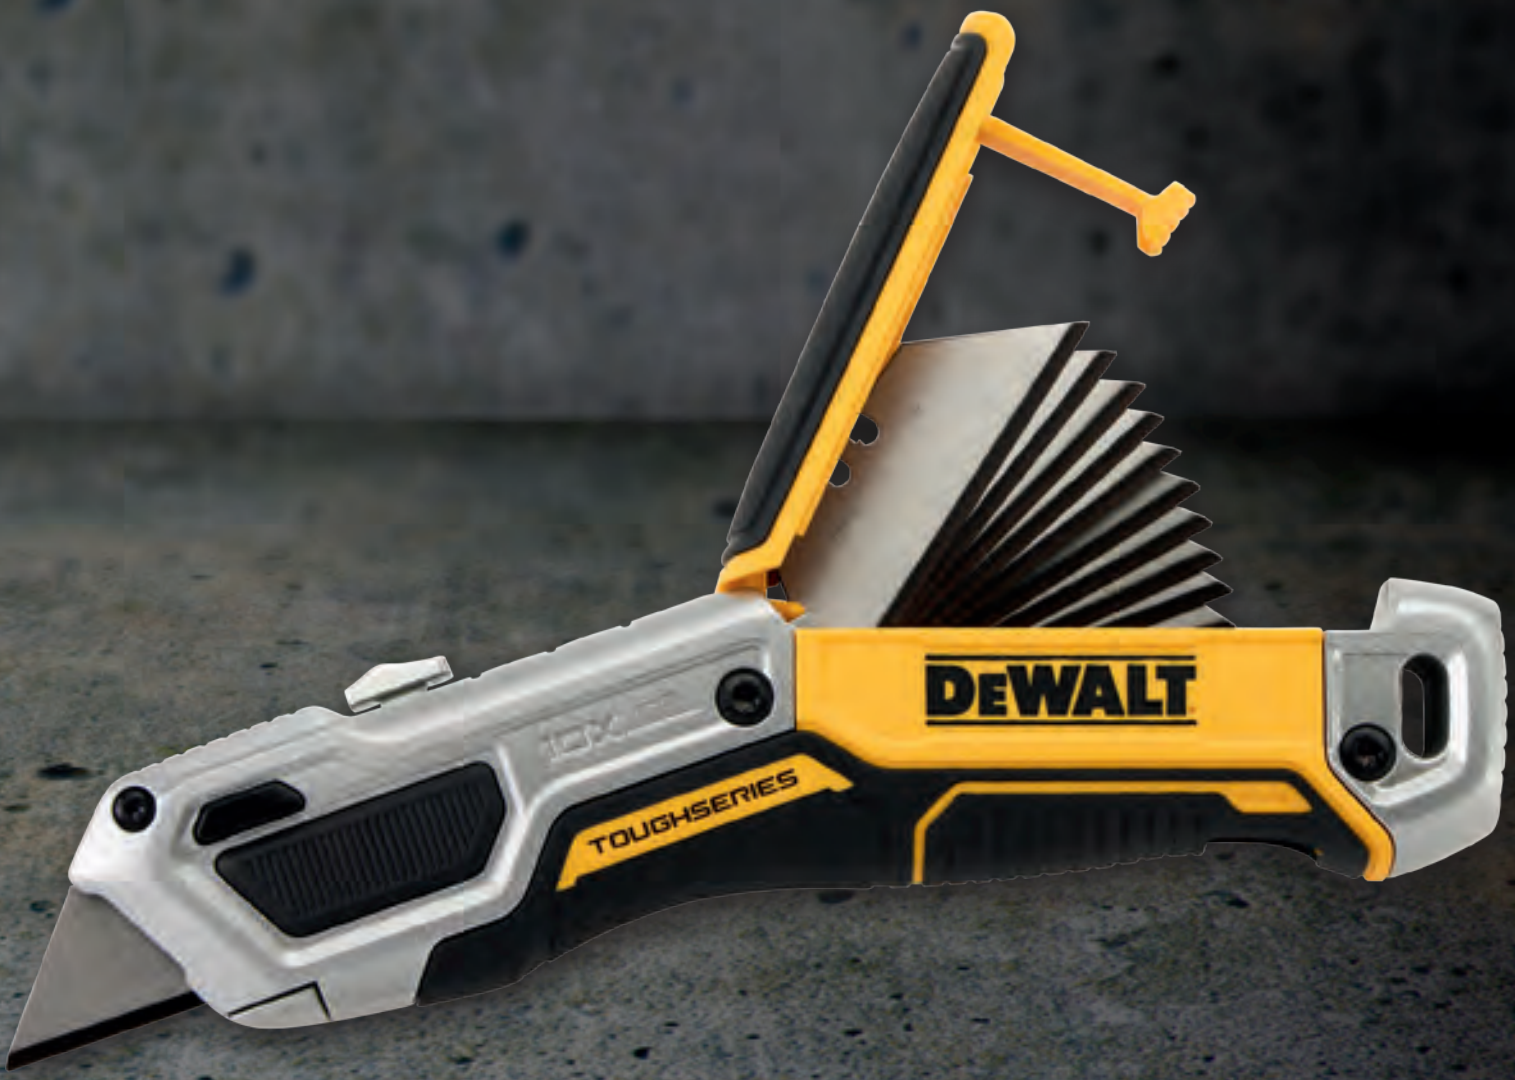

NEW

TOUGH SERIES FIXED BODY RETRACTABLE KNIFE + STORAGE, DWHT10999-0

Maybe one of the best retractable fixed body working knifes on the market!
4 times slider life cycle with premium cast slider with debris resistance.
The working knife has the smoothest blade install, and press-free insert reducing frustration when installing new blade on the knife
Furthermore the knife has an on-board waterproof blade storage which can hold 10 blades.

SPECIFICATIONS	
Debris slider life cycle	20,000
Drop rating	6 meters
Striking/Impact	Nose Strike Cap
Slider smoothness	The best model in the DW range

ART.NR.	PRODUCT DESCRIPTION
DWHT10999-0	TOUGH SERIES FIXED BODY RETRACTABLE KNIFE + STORAGE

DEWALT®

POWER SHIFT™

NO GAS.
NO CORDS.
NO JOB TOO BIG

THE SHIFT
IS COMING
2025!

BE THE FIRST TO HEAR DEWALT NEWS

DEWALT
18V XR
18V XR DEWALT 2.0Ah

WELCOME TO MYDEWALT

Have a tough love for tools? Serious about your tools? Then why not be part of our community that takes this passion to the max? Joining lets you unlock extended tool warranties, gives quick access to news and events, and helps you easily see your tool inventory.

WHY JOIN?

As a MYDEWALT user, you can extend the warranty on some of your DEWALT tools to 3 years. Just subscribe at MYDEWALT, follow the instructions on how to register your new product and add it to your Tool Overview within 4 weeks of purchase.

- Register products for an extended guarantee – up to 3 years
- Get the latest news, updates, and deals as soon as they're available
- Leave reviews on products
- Be part of the community

CREATE AN ACCOUNT

Already registered? Sign in here

HTTPS://CEE.DEWALT.GLOBAL/MY-DEWALT

---

https://cee.dewalt.global/

The yellow and black colour scheme is used on DEWALT Power Tools and Accessories as a trademark. DEWALT cannot be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification.

All prices in the leaflet are recommended retail prices (RRP) in Euro ex and incl VAT.

Be the first to see product news and special offers from DEWALT. Register at MYDEWALT

REGISTER AT

MY DEWALT®